


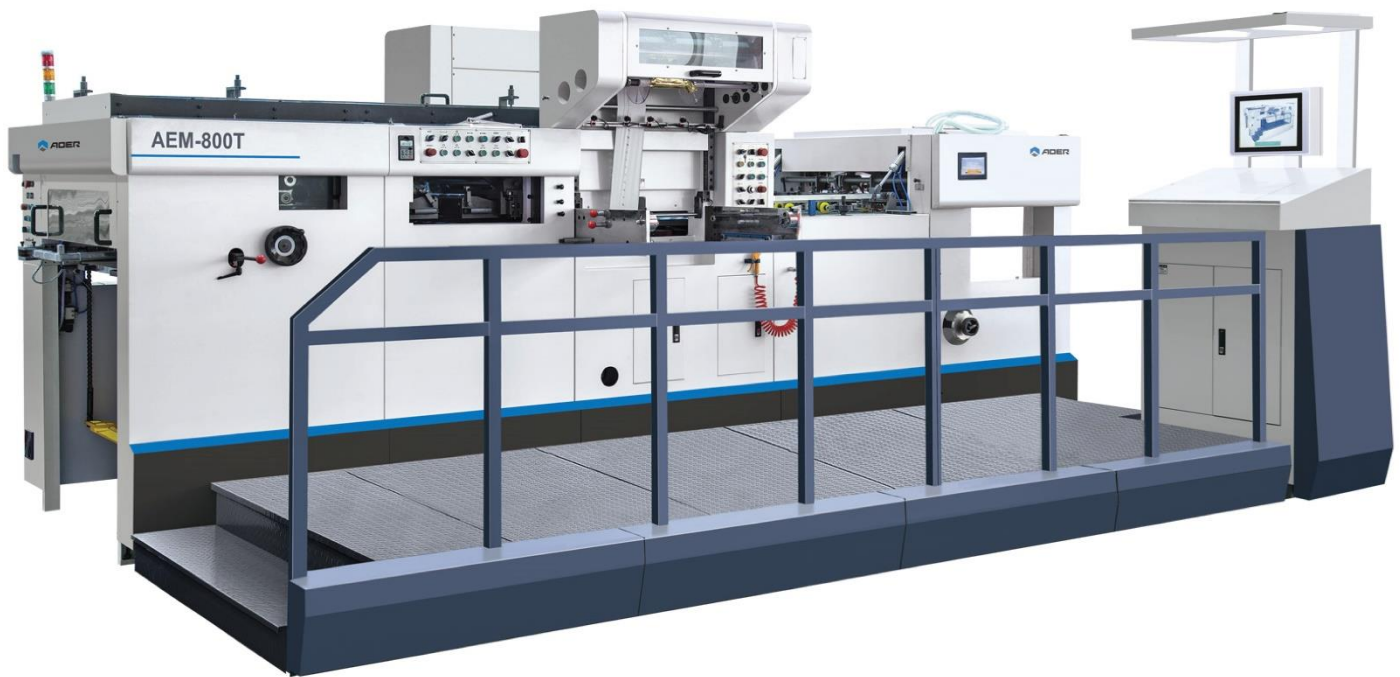

Machine Introduction

Application: Leather heat transfer, business card, plastic flexible packaging, arts and crafts, electronic, labels and tags, cap, toy, apparel. Usage: Foil stamping.

Features:

1. Complete design, accurate installation, high stability, high security, low noise.
2. Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability.
3. High precision intermittent mechanism, high cutting precision, running steadily.
4. Adopt European feeder technology, suction adjustable, stable, precise, good paper applicability.
5. Non-stop feeding, pre-stacking and collection mechanism can shorten the auxiliary time, improve the efficiency.
6. Human-friendly designed die frame and baseplate, makes installation, adjustment convenient.
7. Pneumatic die locking device die frame fixed more steadily, accurately and time saving.
8. Front lay, side lay, feeding device fine tuning device, paper positioning more accurate.
9. Double, crooked, empty optoelectronic position control, ensure the paper in the right position, reduce waste.
10. Electronic control modular design, adopt imported electronic components, ensure the accuracy and reliability.
11. Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, troubleshooting more convenient.
12. Adopt imported server control system for foil stamping, feeding and collecting aluminum foil accurately.
13. Adopt industrial tablet PC, touch screen input data, realize automatic programming, greatly saving aluminum foil.
14. Temperature control system has 8 heating area, temperature setting separately, thermostatic control.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

15. Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability.
16. Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to let better durability.

Technical Specifications

Model	AEM-800T
Max paper size	820 x 620 mm
Min paper size	340 x 280 mm
Max die cutting size	770 x 600 mm
Chase inner size	820 x 628 mm
Pressing plate size	826 x 628 mm
Max stamping area	780 x 600 mm
Min gripper edge	7 mm
Die cutting precision	$\leq \pm 0.1$ mm
Foil stamping precision	$\leq \pm 0.125$ mm
Max cutting pressure	200 T
Max cutting speed	7000 S/H
Max stamping speed	6500 S/H
Max foil roll diameter	$\Phi 250$ mm
Horizontal foil width	15~600 mm
Vertical foil width	15~780 mm
Horizontal foil	2 pcs
Vertical foil	2 pcs
Heating area	8 pcs
Temperature range	50~199 °C
Feeding stack height	1150 mm
Delivery stack height	1000 mm
Application	Cardboard: 0.1~2 mm Corrugated paper: <4 mm
Main motor power	7.5 KW
Heating area power	16 KW
Total power	40 KW
Overall dimension [L(+pre-stacking)xW(+platform)xH]	5150(+1360)x2200(+1300)x2260 mm
Weight	9.5 T

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Main Configuration List

No	Name	Brand	Origin	No	Name	Brand	Origin
1	Main structure	QT500-7 ductile iron	China	17	Invertor	Panasonic	Japan
2	Mold pressing plate	75Cr1 alloy	China	18	HMI	TAISEE	Taiwan
3	Worm, Worm gear	Xingtang	China	19	Sensor	Panasonic	Japan
4	Crankshaft material	Ni-Cr-Mo Alloy	China	20	PLC controller	FATEK	Taiwan
5	Gripper Bar	High strength aluminum alloy	Taiwan	21	Encoder	NEMICON	Japan
6	Gripper	Imported manganese steel	Taiwan	22	Proximity switch	FOTEK	Taiwan
7	Cam box	HANDEX	Taiwan	23	Relay	SCHNEIDER	France
8	Main transmission chain	TYC	Taiwan	24	Optoelectronic switch	Panasonic	Japan
9	Rotary joint	SMC	Japan	25	Button	SCHNEIDER	France
10	Pneumatic solenoid valve	AIRTAC	Taiwan	26	AC contactor	SCHNEIDER	France
11	Mai motor	TECO	Taiwan	27	Breaker	SCHNEIDER	France
12	Feeding pile motor	DUNGLEE	Taiwan	28	Vacuum pump	Tongyou	China
13	Delivery pile motor	DUNGLEE	Taiwan	29	Solid state relay	TAISEE	Taiwan
14	Key bearing	NSK	Japan	30	Industrial tablet PC	Panel master	Taiwan
15	Linear guide rail	Hiwin	Taiwan	31	Servo motor and driver	FATEK	Taiwan
16	Fastener	Gem Year	Taiwan	32			

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Standard Configuration

Feeding section

- European technic precise feeder fit both paperboard and corrugated paper. 4 suction 4 send, can adjust angle and height of suction nozzle according to the paper distortion.
- Double side lay (pull and push).
- Feeding device fine tuning, non-stop adjust.
- Electronic double detector.
- Main, secondary feeding device no-stop switch.
- Wear-resisting PU pressing wheel.
- Dual purpose loader.
- Feeding time fine tuning device.
- Additional carriage rod 1 set, carriage plate 2 set.

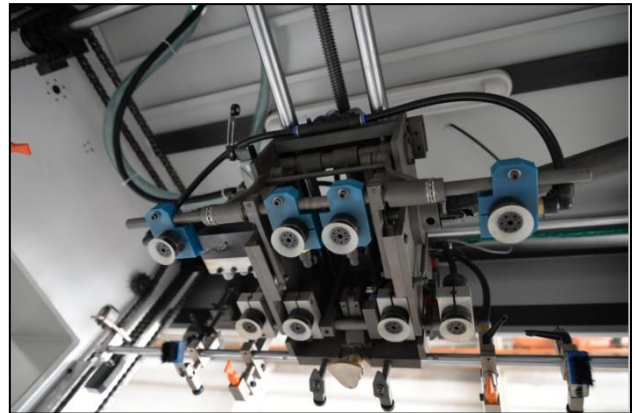

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.






PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Host machine section

- Pressure-bearing part is made of high ductile iron QT500, high strength, never deform.
- Alloy crankshaft with special process treatment.
- Wear resisting worm, worm gear.
- Convenient die flipping device.
- Cycling lubrication oil supply system with high pressure oil pump from Taiwan
- High precision interval device.
- Pneumatic brake clutch device from Italy
- Japanese SMC rotary joint.
- Import gripper bar chain.
- Pneumatic die locking device.
- High hardness, strength Ti-Al alloy gripper.
- Precise pressure adjust device.
- PLC and man-machine interface from Taiwan.
- Additional gripper 1set, cutting die 1set, die frame 1 set.

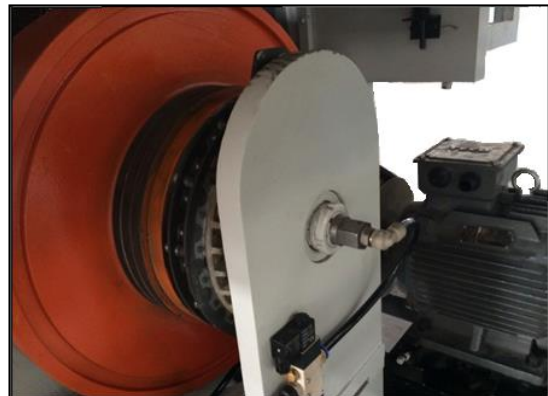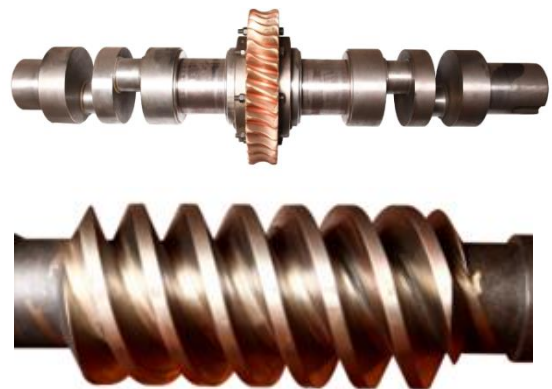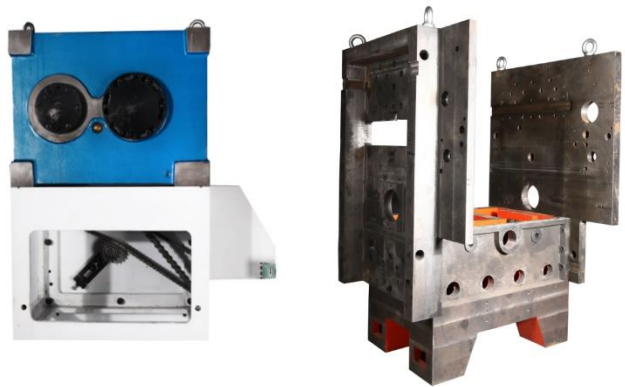

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Stamping section

- Industrial tablet PC, screen touch input data, realize automatic program optimization, saving foils.
- Imported servo motor and control system, precisely feeding foil.
- Separate setting temperature of 8 heating area, thermostatic control.
- Electronic pressure control system, during bronzing, if there is no paper, there is no pressure.
- Convenient crosswise foil placing device.
- Special material honeycomb heating plate helps locating the bronzing plate.
- Adopt RTCr0.8 heating resist cast iron, no deformation while heating, high strength and high durability.

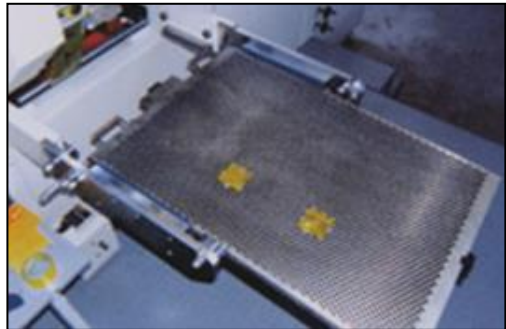

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Delivery section

- Automatic arranging device, double blowing device ensure the paper can be well collected whether thick or thin.
- Digital display touch screen in Delivery section makes operation convenient
- Control panel for human-friendly operation.
- Optoelectronic sensor makes the stack neat.
- Delivery automatic lift control system.
- Auxiliary manual Delivery
- Main chain protection device.
- Roll back prevent device.
- Non-stop Delivery device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA