

DF-120

Plastic Injection Moulding Machine



Machine Introduction

Injection Speed: 90–140mm/s, DF60 up to 120–187mm/s

DF120 Platen Dimension

Fixed Platen Nozzle Dimension

Moveable Platen Dimension

High Injection Pressure:

Screw	A	B	C
Injection Pressure (bar)	2500~2700	2050~2150	1650~1750


Each machine can be customized with a choice between 3 sizes of injection unit/ 9 types of screw & barrel. Cost effective & efficient approach for user's requirement




Digitized plasticizing back pressure control to increase plasticizing quality and efficiency




Secured contact between nozzle and mould is ensured by double hydraulic carriage cylinders which prevent nozzle leakage.

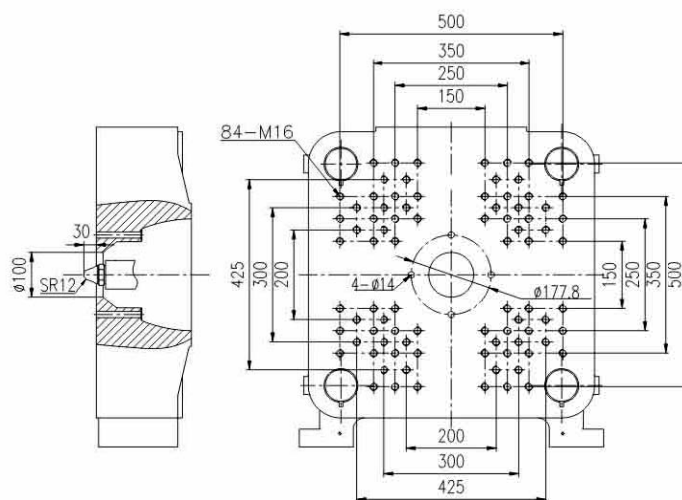

Feeding Hole Dimension



Extractor Assembling Hole Dimension



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

DF120 Injection Moulding Machine Specification

	Item	Unit	DF120			DF120			DF120		
Injection Unit	Injection Unit		ST330			ST470			ST640		
	Screw Type		A	B	C	A	B	C	A	B	C
	Screw Diameter	mm	32	36	40	36	40	45	40	45	50
	Screw L:D Ratio	L:D	22.5	20.0	18.0	22.2	20.0	17.8	22.5	20.0	18.0
	Injection Pressure	kg/cm ²	2594	2050	1660	2571	2083	1645	2553	2017	1634
	Shot Weight (PS)	g	108	137	169	154	190	241	211	268	330
		oz	3.8	4.8	6.0	5.4	6.7	8.5	7.5	9.5	11.7
	Injection Rate	cc / sec	106	135	166	107	132	168	108	137	169
	Shot Volume	cc	129	163	201	183	226	286	251	318	393
	Screw Stroke	mm	160	160	160	180	180	180	200	200	200
	Plasticizing Capacity	kg/h	57	81	105	61	80	110	67	92	118
	Screw Speed	r.p.m	342	342	342	260	260	260	219	219	219
	Nozzle Contact Force	Tons	4.3	4.3	4.3	4.3	4.3	4.3	5.7	5.7	5.7
Clamping Unit	Clamping Type		Five-Point Vertical Double Toggles								
	Clamping Force	Tons	120			120			120		
	Opening Stroke	mm	400			400			400		
	Max Daylight Opening	mm	850			850			850		
	Mould Height (Min-Max)	mm	180-450			180-450			180-450		
	Space Between Tie-bars (WxH)	mm	420x420			420x420			420x420		
	Platen Dimension (WxH)	mm	650x640			650x640			650x640		
	Mould Locator Diameter	mm	Φ 100H8			Φ 100H8			Φ 100H8		
	Ejector Force	ton	4.8			4.8			4.8		
	Ejector Stroke	mm	120			120			120		
	No. of Ejectors	pcs	5			5			5		
Others	System Pressure	kg/cm ²	170			170			170		
	Electric Motor Power	kW	18			18			18		
	Heating Power	kW	6.55			8.25			10.40		
	Temperature Control Zones	Zone	4+1			4+1			4+1		
	Gross Power Consumption	kW	24.6			26.3			28.4		
	Oil Tank Capacity	L	340			340			340		
	Machine Weight	Tons	4.2			4.2			4.2		
	Machine Dimension (LxWxH)	mxmxm	4.5x1.1x1.72			4.5x1.1x1.72			4.5x1.1x1.72		

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA