



Machine Introduction

GV-1080/1300 UV full-sized coating machine, with the coating roller driven by the servo motor, the independent variable frequency motor drives the metering roller to achieve reversing or veering coating; the machine has an integrated intelligent control over all sections. The machine, which features multifunctional application as well as accurate and even coating, suits various kinds of sheets coating with water-based varnish or UV-protection oil. Optional: Powder removal assembly, cold-wind drying device, ceramic metering roller, etc.

Performance and Characteristics:

1. Feeder: Accurate and fast sheets feeding, precise control
2. Coating: The metering roller is driven by the independent variable frequency motor. Adjust the rotating speed for a better coating effect.
3. IR hot-wind drying: Fire and crack resistant Teflon conveyor belts; the thermostatic system for fast sheets drying with low energy consumption.
4. UV curing: Electric UV control system automatically adjusts the power according to the speed. Heat and crack resistant Teflon conveyor belts.
5. Automatic stacker: Automatic pneumatic high-speed stacker with a sheets counter.
6. Anilox roller coating: Enclosed squeegee system with the high-precision anilox roller for coating. Optional: ceramic anilox roller.

Features:

1. Max speed: 80m/min
2. Module construction Free options
3. Packaging & Commercial


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Features

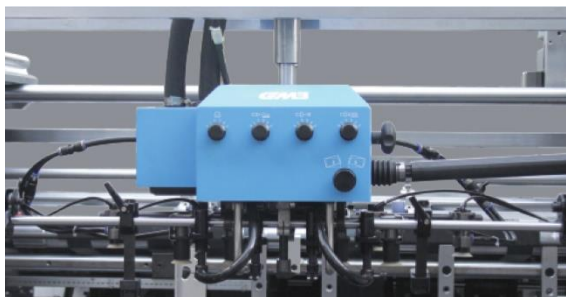

Feeder

Accurate and fast sheets feeding, precise control+vacuum pump connecting with suction nozzles



Air cooling

Fans cool down the surface temperature of sheets after drying to reduce stickiness




Coating

For sheets with sparse pores, a primer coat is applied for more even coating in the subsequent stage




UV curing

Electric UV control system automatically adjusts the power according to the speed; Heat and crack resistant Teflon conveyor belts

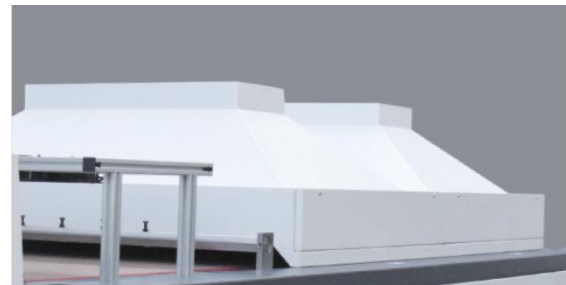

IR hot-wind drying

Thermostatic system for fast drying with low energy consumption

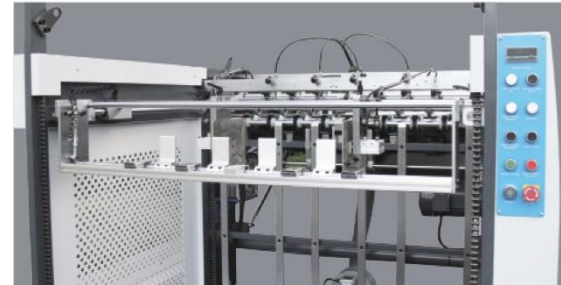

Automatic stacker

Automatic pneumatic high-speed stacker with a sheets counter
Non-stop delivery mechanisms



Anilox roller coating (optional)

Enclosed squeegee system with the high-precision anilox roller for coating. Optional: ceramic anilox roller.



High-pressure air-knife (optional)

Pneumatic high-pressure air-knife system solves problems such as thin sheets sticking to the rollers and paper curls.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



GV-1300 Fully Automatic High-speed Full-sized UV Coating Machine



Technical Specifications

Model	GV-1300
Max sheet size	1300x1650 mm
Min sheet size	390x450 mm
Working speed	0-80 m/min
Suitable sheet thickness	200-600 g/m ²
Gross power	125 kw
Total weight	7800 kg
Overall dimension	14245x2150x1950mm

Configuration List

No	Configuration	Brand Supplier
1	Touch screen	Flexem
2	Relay	OMRON
	Contactor	Schneider
3	Inverter	DELTA
4	Photoelectric switch	Panasonic
5	Servo diver	DELTA
6	PLC	DELTA
7	Servo motor	DELTA
8	Servo gear reducer	KOFON
9	Suction motor	-
10	Feeder head	GMB
11	Cylinder	AirTAC
12	Pressure regulating valve	AirTAC
13	Hoist motor	WANSHSIN
14	Main motor	WANSHSIN
15	UV lamp	HPE
16	Conveyor belts	NYCO
17	Bearing	NSK/HRB
18	Vacuum pump	BECKER

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

