




Machine Introduction

This machine is a printing machine which adopts flexible photosensitive resin plates, rubber plates as the base material, anilox rollers for transferring ink, liquid ink for printing. It is controlled centrally by PLC system and generally consists of unwinding section, tension control section, infeed traction section, printing section, drying section, outfeed traction section, rewinding section and control section. This machine is an ideal machine for printing paper cup, carton, paper bag and so on.

Advantages

1. Anilox roller inking structure effectively guarantees printing quality.
2. The machine has strong adaptability, since it can achieve satisfactory printing effect on various materials, from plastic film to corrugated board.
3. The combination of printing units is flexible, because users can increase or decrease printing unit number according to different requirements.
4. Low-cost printing plate and Low-loss printing process can effectively reduce printing cost, which is 30~50% lower than gravure printing.

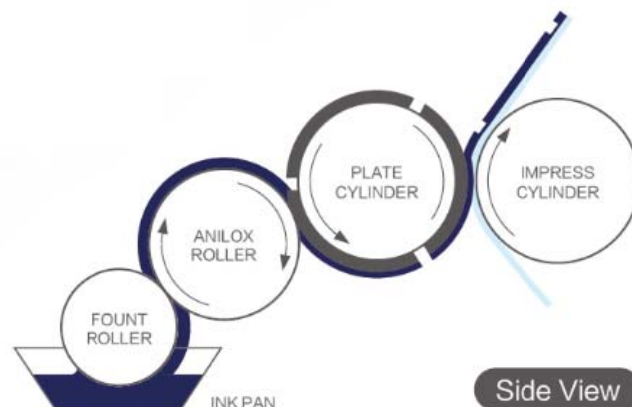

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

Technology


1. Main Structure

Unit type structure makes the machine be very flexible according to various printing content, even add more printing units into the machine.

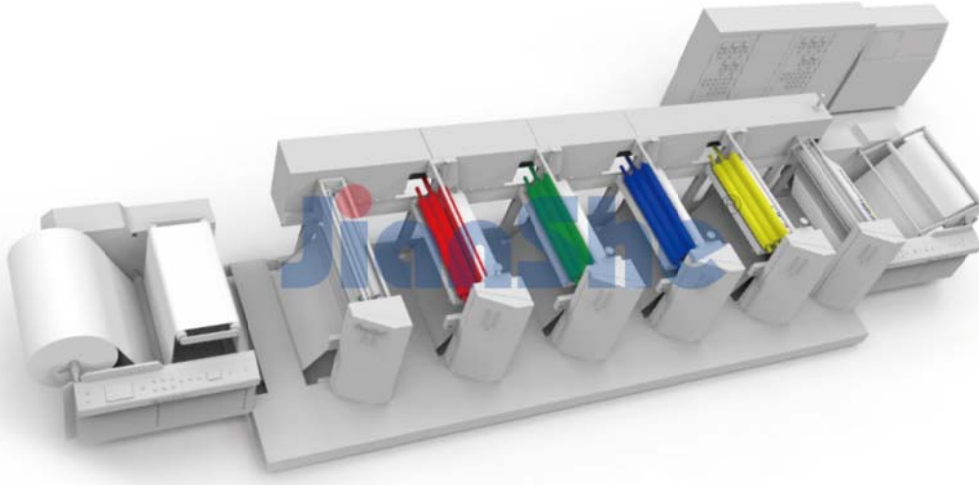

2. Printing Principle

Flexible printing plate reduces the printing cost greatly and water-based ink is more beneficial to the human and environment.

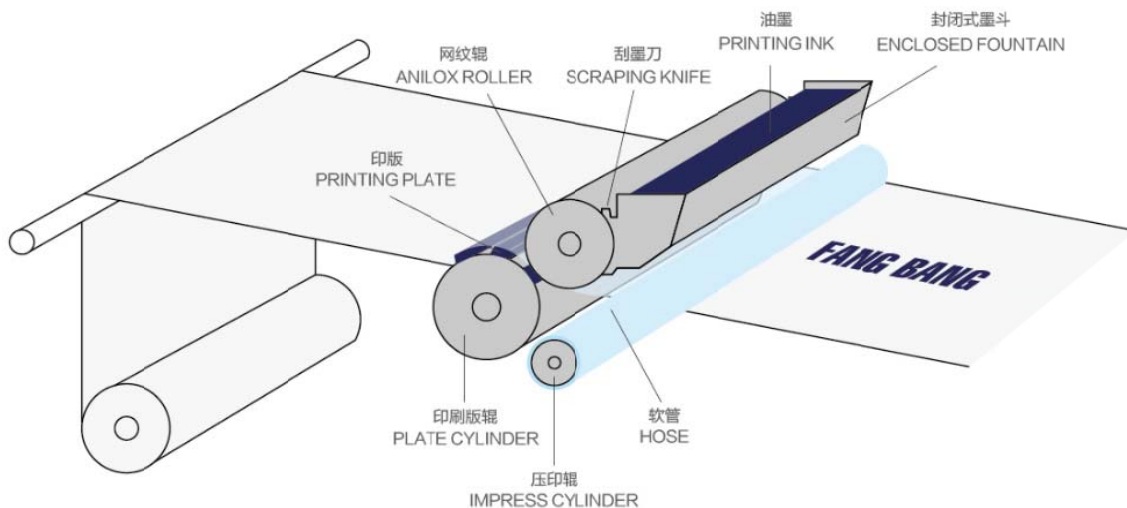

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

Specification

1. Unwinding Section

- 1.1. Separate single-station unwinding rollstand with hydraulic lifting device.
- 1.2. Air shaft for material loading.
- 1.3. Magnetic powder brake for unwinding and automatically constant tension controller for unwinding tension control.
- 1.4. Automatic Alarm Function: if the diameter of material reel becomes too small, it will decelerate the machine and remind the operator for replacement.
- 1.5. Automatic Stop Function: the machine stops automatically when materials are broken.
- 1.6. Equipped with air gun for quickly injecting compressed air.
- 1.7. Equipped with EPC web guide control system for material alignment.
- 1.8. Equipped with de-dusting system to ensure the rate of finished products.

2. Infeed Section

- 2.1. Integral alloy iron double layer frame is adopted in this section.
- 2.2. Double rubber nipper roller is used for paper feeding, whose pressure can be adjusted by pneumatic cylinder.
- 2.3. Taper tension control system ensures the color registration accuracy.

3. Printing Station (4 colors)

- 3.1. This section contains 4 stations; each station is responsible for printing 1 color.
- 3.2. Integral alloy iron double layer frame; 45 degrees helical gears for transmission.
- 3.3. Main motor with inverter for speed control; timing belt for transmission.
- 3.4. Ceramic anilox roller for ink transferring; single-blade reverse ink-scraping system.
- 3.5. Pneumatic clutch pressure for anilox rollers and plate rollers.
- 3.6. When the machine stops, anilox rollers and plate rollers can be disengaged automatically.
- 3.7. Introduce automatic ink-feeding pump; ink can be recycled during machine's running, which ensures the uniformity of printing quality.
- 3.8. Enable to quickly change the anilox roller and stainless ink box without any tools.
- 3.9. Printing Cylinder
- 3.10. Ceramic Anilox Roller (LPI can be decided by customer).
- 3.11. Transmission gears: CP1/8.
- 3.12. Automatic Cleaning Printing Plate Function: when the machine stops and the anilox roller has been disengaged, the printing cylinder will continue running to transfer the ink left onto paper, to keep the printing plate clean.
- 3.13. Automatic Preventing Clogging Function: when the machine stops, the anilox roller will rotate to prevent the ink on its surface from drying and blocking holes (meshes) on it.

4. Outfeed Unit

- 4.1. Integral alloy iron double layer frame is adopted in this section.
- 4.2. Double rubber nipper roller is used for paper feeding, whose pressure can be adjusted by pneumatic cylinder.

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

- 4.3. This section can instantaneously shoot and detect the printed material during the printing process and movable transversely.
- 4.4. The detection location can be set in transverse and longitudinal directions.
- 4.5. It can zoom and observe the image with a fixed position to guarantee the printing quality.

5. Rewinding Unit

- 5.1. Separate single-station unwinding rollstand with hydraulic lifting device.
- 5.2. Air shaft for material loading.
- 5.3. This section is driven by motor and adopts closed loop tension control with floating roller.
- 5.4. Automatic Stop Function: the machine stops automatically when materials are broken.
- 5.5. Equipped with air gun for quickly injecting compressed air.

6. Drying Section

- 6.1. Separate drying system (electric heating).
- 6.2. I.R. short-wave heating and drying system (the temperature is adjustable).
- 6.3. Hot air and natural air drying system including exhaust fan and blower.
- 6.4. Hot air recycling system, with adjustable device for in/outfeeding air.
- 6.5. Central Exhaust System: waste gas will be exhausted centrally by exhaust fan

7. Control Section

- 7.1. The whole machine is centrally controlled by PLC system, which has self-diagnosis function and monitors the machine status.
- 7.2. Text screen is adopted for input control and machine status display.
- 7.3. The machine is mainly controlled by inverter-fed motor.
- 7.4. Magnetic powder brake for unwinding and automatically constant tension controller for unwinding tension control.
- 7.5. Closed loop tension control system for rewinding, which ensures the perfect rewinding edge alignment.
- 7.6. Hot air control with 2 levels: high and low.
- 7.7. I.R. drying control with 2 types: broad band and narrow band.
- 7.8. Automatic Alarm Function: if the diameter of material reel becomes too small, it will decelerate the machine and remind the operator for replacement.
- 7.9. Automatic Stop Function: for both un/rewinding sections when materials are broken.
- 7.10. The machine will also stop automatically once the preset yield is finished.
- 7.11. Automatic finished length measurement function (in meters).
- 7.12. Speed can be adjusted at multiple points

8. Others

- 8.1. Ball bearings from NSK, Japan.
- 8.2. Pneumatic components from Airtag, Taiwan.
- 8.3. Low Voltage Electric Components: Schneider, Germany.
- 8.4. Tool Kit (1 set)

OPTIONS AVAILABLE

1. Paper Preheating System

Processed before printing, to reduce the paper's moisture, and ensure the color registration accuracy.

2. Paper Edge Cutting Device

It consists of 2 sets of cutters for edge cutting and 1 set of waste blower, which is suitable for make a further processing on the printed paper.

3. Slitting Device


It consists of 1 sets of cutter for slitting and 1 bowed roller to make the slit paper rolls separate.

4. Corona System

Apply the electricity onto the surface of the material in the pattern of corona so that the ink can stay on the paper laminated firmly.

5. Static Image Detection System

It can zoom and observe the image with a fixed position to guarantee the printing quality.

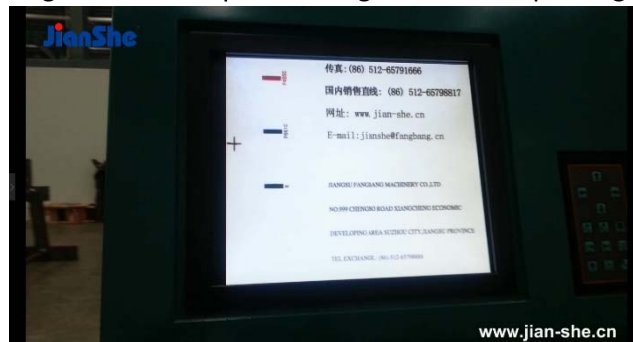

6. Color Registration System

This system can make the printing machine be able to adjust the color registration automatically (Y axis) by itself, which is more suitable for high-speed and high-precision printing.



* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA



7. Plate Mounting Machine (YT-ZB Series)

The machine is mainly supporting flexographic printing machine, helping users to mount flexible plate onto printing cylinder quickly and accurately. Through high magnification zoom lens, high-resolution CCD camera and LCD, the machine can effectively reduce mounting time, decrease printing loss and shorten adjusting time. The machine adopts precise linear guide rail for horizontal positioning, meanwhile the lens height is adjustable. Precise screw structure is applied on the machine, so that the lens holder can be moved in horizontal and vertical directions. This machine is not only simple, but also powerful, is the ideal auxiliary equipment of flexographic printing machine.

Model	830	900	1000	1100	1220	1280	1430	1630
Plate Cylinder Length	850mm	920mm	1020mm	1100mm	1220mm	1300mm	1450mm	1650mm
Plate Cylinder Perimeter	286~1200mm							
Plate Thickness	1~5mm	1~5mm	1~5mm	1~5mm	1~5mm	1~5mm	1~5mm	1~5mm
Total Power	0.5kW	0.5kW	0.5kW	0.5kW	0.5kW	0.5kW	0.5kW	0.5kW
Air Source	0.4MP	0.4MP	0.4MP	0.4MP	0.4MP	0.4MP	0.4MP	0.4MP
Plate Material	柔性版材 Flexo Plate							

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

8. Anilox Roller Cleaner



The machine is mainly supporting flexographic printing machine, making use of ultrasonic to clean anilox rollers. Its working principle is to adopt ultrasonic to generate many tiny bubbles in cleaning fluid, which can peel off ink, fines and other dirt on anilox rollers quickly and entirely. Since the only consumable material for this machine is cleaning fluid, this machine can reduce cost greatly as well as protect environment. Its special cleaning method can effectively reduce damages to anilox rollers in the cleaning process, thereby prolonging the service life of rollers

Model	830	900	1000	1100	1280	1430	1630
Vibrator Number	21	21	30	30	36	39	45
Ultrasonic Power	1050W	1050W	1050W	1050W	1050W	1050W	1050W
Ultrasonic Frequency	40KHz	40KHz	40KHz	40KHz	40KHz	40KHz	40KHz
Heating Power	700W	1400W	1400W	1400W	1400W	1400W	2100W
Total Power	1750W	2450W	2900W	2900W	3200W	3350W	4350W
Voltage	220V	220V	220V	220V	220V	220V	220V

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

Working Conditions

Power	3 phases, 380V $\pm$ 10%, 50 Hz
Compressed Air	pressure: 0.6 MPa volume: approx. 0.5 m ³ /h oil and humidity: $\neq$ 8 mg/m ³
Installation Height	altitude: 1500 m
Ambient Requirement	relative moisture: Max. 65% when 40 °C temperature range: 10~40 °C

Technical Specifications

Max. Reel Diameter for Un/Rewinding	ϕ 1500 mm
Paper Reel Core Diameter	Φ 76 mm (3")
Max. Paper Width	1320 mm
Max. Printing Width	1300 mm
Printing Repeat Range	360~1200 mm
Thickness of Plate	1.7 mm
Thickness of Adhesive Tape and Plate	2.08 mm
Color Registration Accuracy	$\pm$ 0.12 mm
Thickness Range of Paper	60~400 g/m ²
Tension Control Range	10~50 kg
Max. Mechanical Speed	150 m/min
Total Power of Machine	132 kw
Weight of Machine	Approx. 12250 kg
Overall Dimension	L12000mm $\times$ W4300mm $\times$ H2700mm


* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

FINISHED PRODUCT SAMPLES

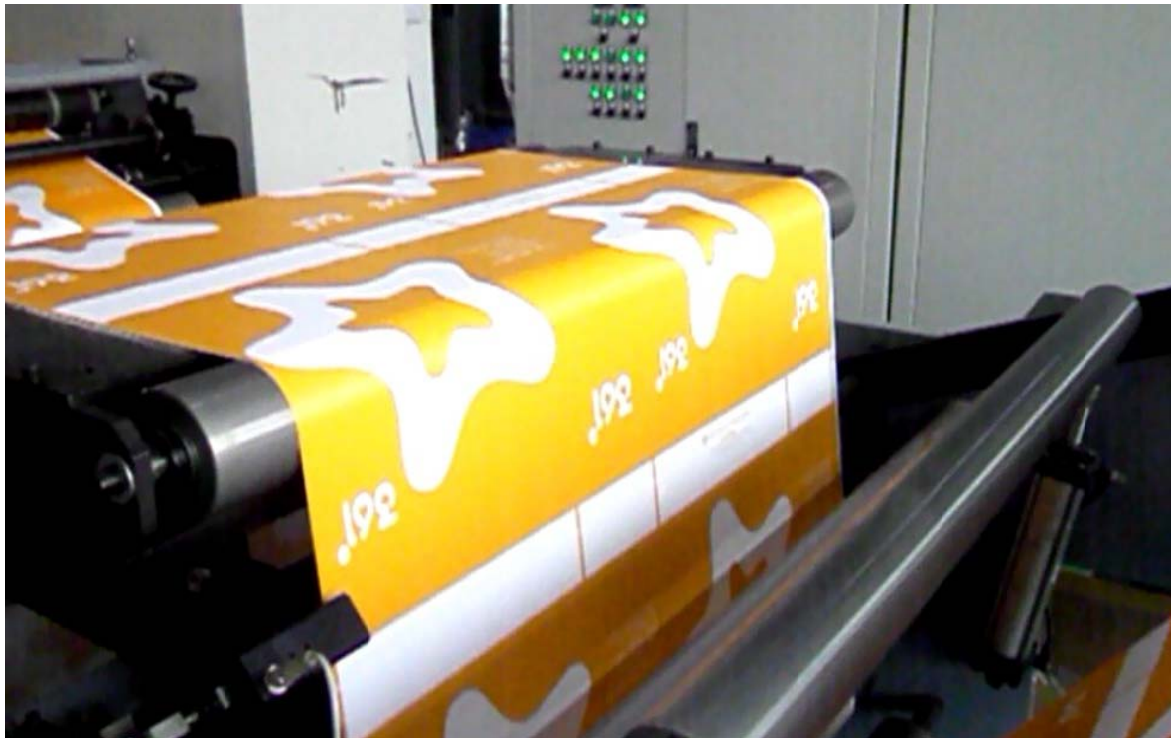

* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA



* Warnadanspesifikasimesinbisaberubahsesuaidenganperubahanspesifikasipabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA