


RDC-2514A

Automatic Lead Edge High Speed Die Cutting Machine

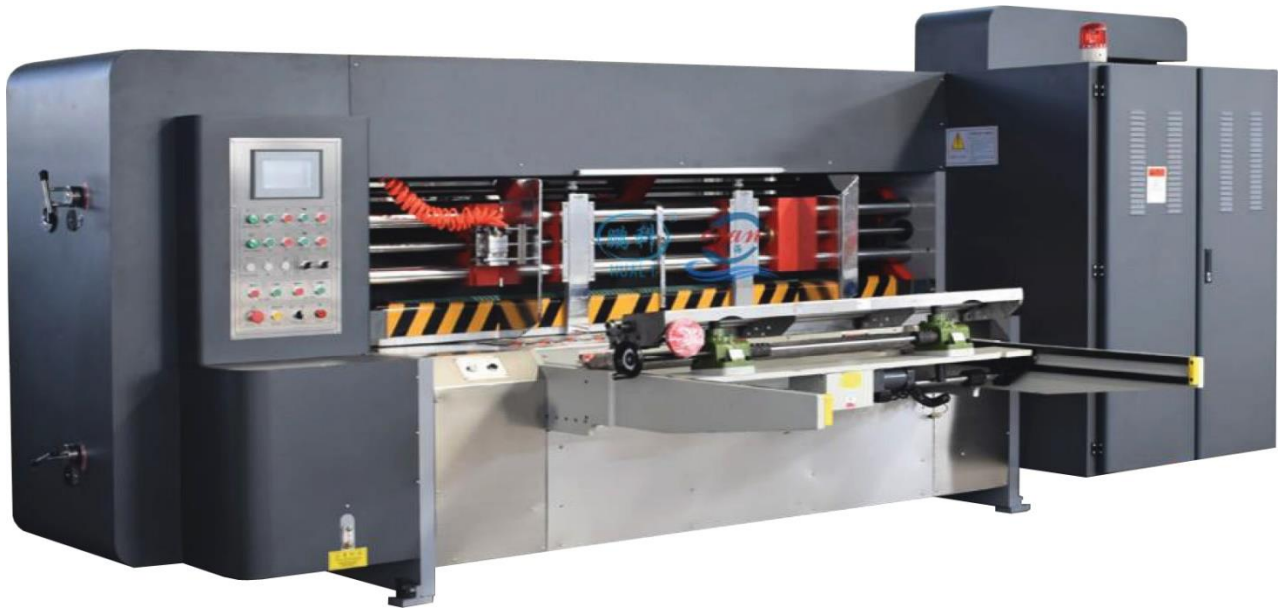

Machine Introduction

Machine function and characteristic:

- The whole machine electric appliance and computer software all adopt international famous brand, schneider, omron, Siemens. the quality is stable and reliable. Man-machine interface, computer order management, easy to operate.
- Whole wallboard and important components are adopted aging treatment, eliminate the metal internal stress; Adopt high precision machining centers, CNC grinding machine for grinding processing.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



- The machine shaft, roller are adopted high quality steel, grinding processing, high precision computer dynamic balancing correction and surface hard chromium plating.
- The whole transmission gear adopts 20CrMnTi forging and high frequency quenching, hardness HRC58-62, And gear grinding processing precision level 6, and ensured the long-term use of tinted with high precision
- Machine transmission parts (shaft, gear joint) are adopted free key connection (LOCK-ALX), the connection eliminate clearance. It is suitable for long-term high-speed running with high torque.
- The machine drive bearing, important driving parts adopt three big domestic famous brand: HRB, simple maintenance, long service life.
- The engine lubrication system is adopted automatic spray type lubrication, Circulating oil supply, uniform oil loading of gear.
- It adopts Working gap adjustment, rapid adjustment without wrench, quick performance and convenient adjustment.
- This machine adopts double frequency changer design, start and run steadier, energy saving.
- Option: stacking department (the standard configuration does not include inside)

Auto Feeder department



1. Lead Feeder paper system

1. Adopt world advanced leading edge paper feeding system (four-row wheel design), roller type leading edge paper feeding structure, multi-wheel and multi-point suction paper feeding, high friction force, high speed, stable and accurate paper feeding.
2. The suction assist feeder paper, draught fan 7.5 kw, at different levels can be bent according to the board, air volume adjustment, ensure bent cardboard and thin cardboard feeding smoothly.
3. Lift paperboard, drop paperboard adopt cylinder push, move quick and powerful.
4. Side baffle is electric and computer touch screen adjustment (computer setting value, automatic adjustment), front baffle is manual synchronous adjustment, back baffle box is electric adjustment
5. Feeder wheel is from Taiwan MaxDura brand, Durable Wear Resistant.
6. Install 7-inch touch screen, which can be displayed automatically production quantity, production speed, can be set production quantity.
7. Die cutting department is equipped with interlocking control switch, emergency stop, stop or resume feeding (the other is equipped with the machine deceleration button).

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



2. Feeder paper roller

1. Up roller Outer diameter: ϕ 155 mm
2. 45 # seamless steel tube, parcel wear-resisting rubber, and do dynamic balance correction.
3. Down roller, external diameter ϕ 155 mm, embossing and hard chromium plating, and do dynamic balance correction.
4. Feeder Paper roller gap dial manual adjustment, adjustment range 0-12 mm.
5. The front feed rubber roll (elastic rubber roll) is elastic lifting, automatic pressure adjustment, can reduce the strength of corrugated cardboard damage.

3. Pat to orderliness device

The machine has pneumatic Pat to orderliness device, Cardboard transverse positioning more accurate, avoid waste, (computer control Pat to orderliness time)

4. Computer device



1. The main motor adopts frequency conversion motor, frequency converter adopts Delta from Taiwan, energy. Saving and save electricity can reach 30%.
2. Fan adopts independent inverter control; wind pressure is adjustable.
3. Home screens adopt PLC control, human-machine interface
4. 7-inch color touch screen control paper department, storage orders, memory reset, production speed of 30,60, 90, 120, cruise control, infrared photoelectric counting, can preset orders of production.
5. The whole machine is controlled by light, electricity and gas, easy to operate.
6. The rear of the machine is equipped with "emergency stop, speed up and speed down" joint control device, which is convenient and quick to operate.

Die cutting department



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

1. Die roll (lower roll)

1. Outer diameter is: $\phi 432\text{mm}$. (not including die cutting mould)
2. Cast steel material, surface grinding, hard chromium plating.
3. Balance correction, increase the running stability.
4. knife mold fixed screw holes horizontal spacing is 100mm, The circumference is 18 equal parts
5. Apply to die cutting mould height 25.4 mm
6. Die cutting thickness is :16 to 18 mm (three layer board), 13-15 mm (five layer board).

2. rubber roller (up roller)

1. The outer wall is: $\phi 434.2\text{mm}$
2. Cast steel material, surface grinding, hard chromium plating.
3. Balance correction, increase the running stability.
4. Manual adjustments with die cutting roller gap.
5. Rubber gasket thickness 10mm, (outside diameter is: $\phi 454.2\text{mm}$), width is 240mm.

3. Lateral (horizontal) movement, repair device:

1. Rubber pad is imported from Depair, Germany, easy to install and adjust, die cutting blade is smooth, long service life, up to 12 million times, greatly reducing the production cost.
2. Mechanical horizontal 40mm, winding device, and pneumatic device to control the cutting mould up and down movement, extend the life of rubber pad (photoelectric control).
3. Repair adopt electric repair device, improve the rubber gasket repeat utilization rate, can repair 3-4 times.
4. Die cutting roller automatic pneumatic separation device, reduce wear rubber gasket, thus improve the service life.
5. Automatic line speed compensation, so that you'll rubber mat uniform wear, and equipped with rubber mat repair device, rubber mat can be used for many times, to ensure that each batch of carton size is completely consistent.
6. Die cutting roll phase, phase adjustment using planetary gear structure, PLC touch screen control and electric digital 360-degree adjustment.

Transmission gear



1. The main drive gear adopts 20 CrMnTi high quality alloy steel, after tempering, high-frequency quenching, gear grinding.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



2. Six levels of accuracy, smooth and unhindered operation, low noise, hardness HRC55-60, long service life, wear small, can guarantee the printing matching color accuracy unchanged for a long time.
3. The machine gear are free-key link locking, free without gap junction, maintain long-term printing overprint Accurate

Oil supply device

1. Mechanical oil pump (double pump oil supply cycle)
2. circulating oil supply. The oil amount of the gear is even, and the oil level of each group is balanced.
3. Lubrication using close spray lubrication system to ensure the transmission accuracy of life

Stacking department (option, standard configuration does not include inside.)



1. Catch paper arm can be manual or automatic operation, has insurance mechanism, prevent paper arm suddenly whereabouts, ensure the safety of operating
2. Bed table lifting and down force, the chain drive
3. Stack height is 1600 mm.
4. Bed table with cardboard stacking automatically adjust tilt height, lifting motor, with brake function. Bed Table can maintain a fixed position, not falling.
5. Vapour-pressure type Lift the paper mechanism, when cardboard stack to a predetermined height, catch paper pallet automatically open, the support holds up the cardboard.
6. Planar wrinkles belt, prevent the cardboard down glide.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657




RDC-2514A

Automatic Lead Edge High Speed Die Cutting Machine

Technical Specifications

Model	RDC-2514A
Wallboard to wallboard	2800mm
Design speed	160 (piece/min)
Economic speed	80-140 (piece/min)
Max Cardboard size	2550*1400mm
Max die cutting size	2500*1400 mm
Min cardboard size	400*600mm
Die cutting thickness	3-8mm
Main motor power	11kw
Air fan power	7.5kw
Producing power	18.5kw
Producing power	19.5kw
Die cutting precision	±1mm
Weight about	6.5 tons
Overall size (machine size)	2600*4900*2000mm
Overall size (machine + stacking size)	9800*4900*3000mm

Mechanical schematic

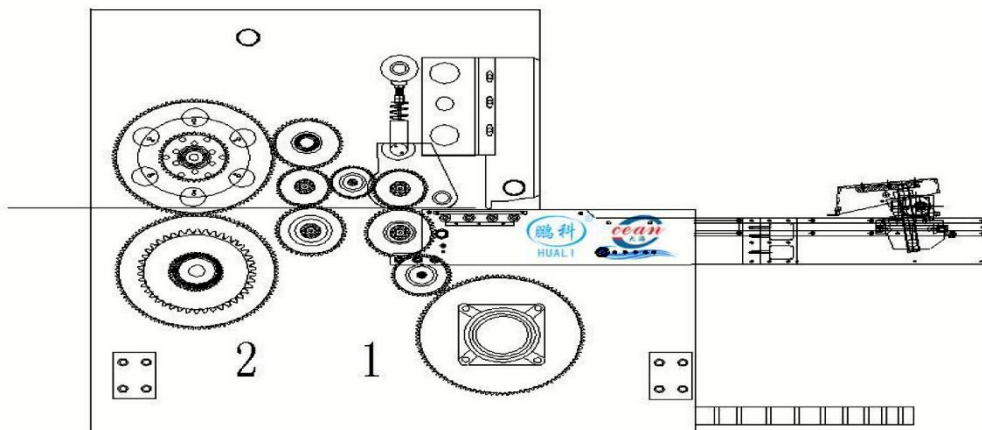

1. Feeder unit
2. Die cutting unit

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.






PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



RDC-2514A

Automatic Lead Edge High Speed Die Cutting Machine

Ground Drawing

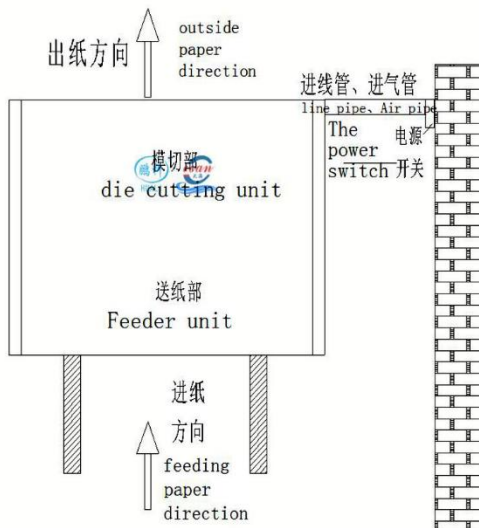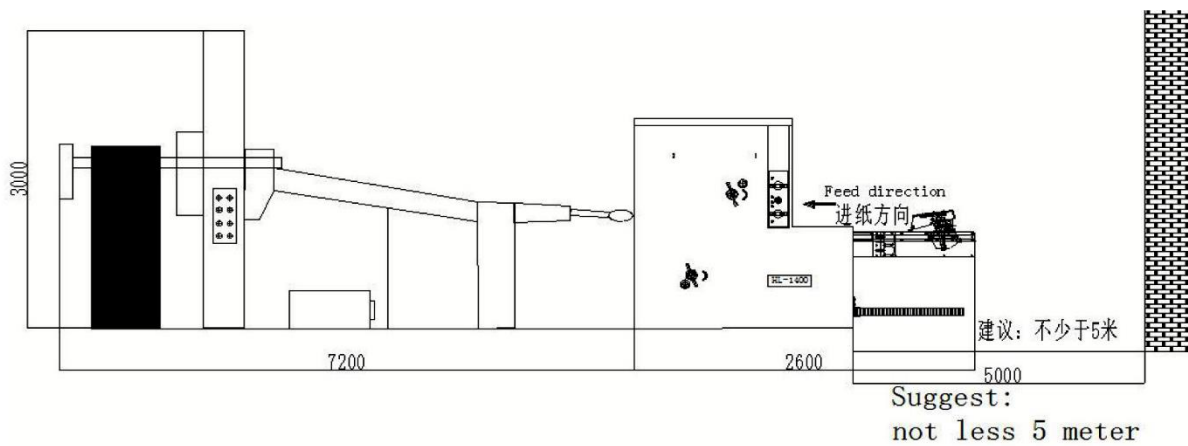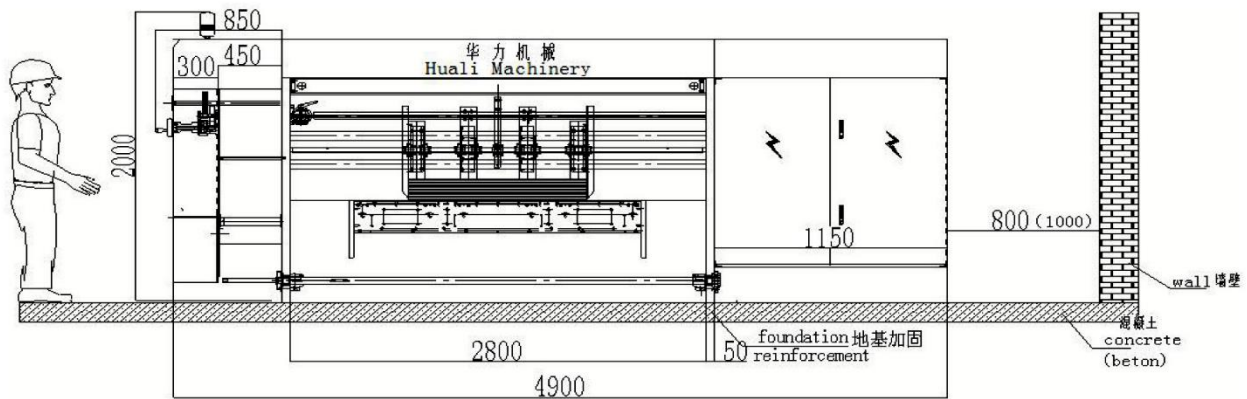

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



RDC-2514A

Automatic Lead Edge High Speed Die Cutting Machine

Main Configurations

No	Main parts	Picture	Function	Brand	Remark
1	Lead edge system		four row rollers	Shangdong Xiaoshen	Speed: 160 pcs/min
2	Frequency		Main motor 11kw Air fan 7.5kw	DELTA from Taiwan	
3	Contactor			Schneider	
4	Component Inspector			Schneider	
5	Electrical components			CHINT	
6	PLC			Vigor From Taiwan	
7	Encoder			AUTONICS	
8	Touch screen		Main: 7 inch	MCGS	
9	Button			Schneider	
10	Main motor		11kw	Jinglong From guangzhou	Frequency conversion motor

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



RDC-2514A

Automatic Lead Edge High Speed Die Cutting Machine

11	Air Fan		7.5kw	Shangwei	
12	The gear reducer		0.18kw 0.37kw	Zhejiang	Phase repair side Platens
13	Die cutting roller		up roller: 434.2 down roller: 432	Precision cast steel	Wall thickness of 40 mm, dynamic Balancing correction, hard Chromium plating
14	Main body wallboard		thickness: 50mm	Precision cast iron HT250	Taiwan large processing center production
15	Transmission gear		thickness: 50mm	20CrMnTi	High frequency quenching of grinding teeth
16	Bearing			HAWALUO	
17	Pneumatic components			HUANENG	
18	No key adapter ring			Xianyang	
19	Overrunning clutch			Xianyang	
20	Rubber		width: 240mm	Depair from Germany	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

