


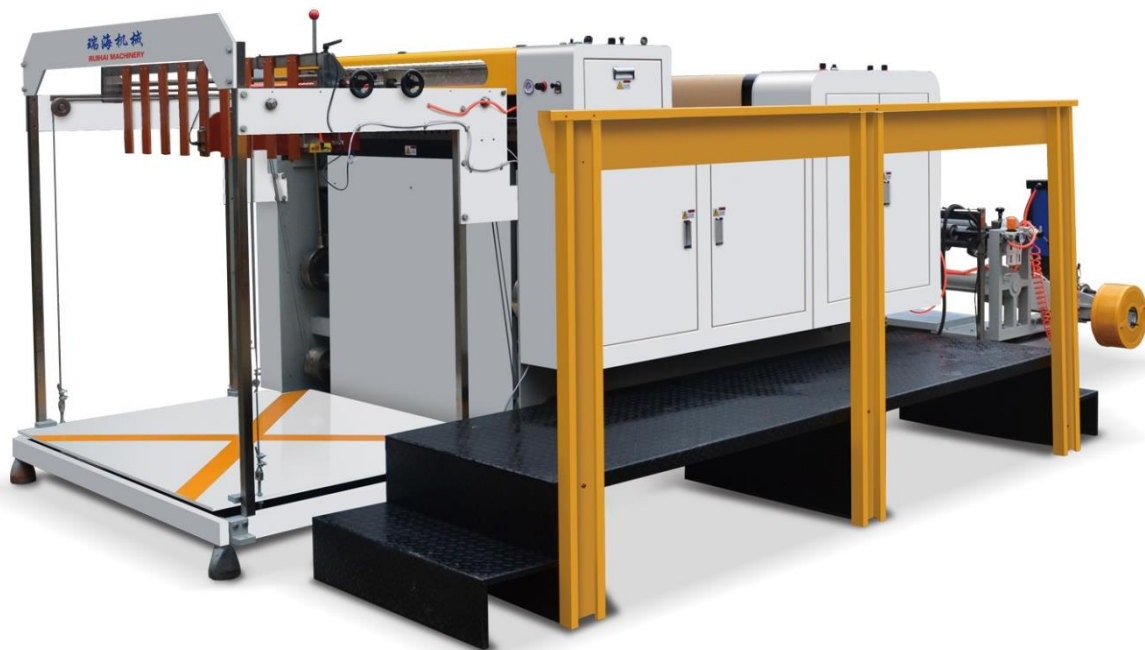

Machine Introduction

Performance and characteristics

1. This paper cutting machines is suitable for cutting big rolling packaging materials such as paper, paper-plastic, multi-color laminated material, etc.
2. It adopts servo motor for controlling constant-length cutting.
3. It adopts pneumatic, photoelectric sensor for controlling transmission system, with photo, electric, gas together.
4. It has the functions of easy operation, high precision, good stability, low noise.
5. This machine has the functions of the frequency converter timing device, automatic counting, stop working by alarm and tension adjustment by magnetic powder or manual with friction unit.

Main Specification

1. Unwinding unit

Pneumatic airshaft paper shaft 1000kg

1. Maximum paper roll diameter: 1400mm (55")
2. Maximum paper roll width: 1400mm
3. Minimum paper roll width: 300mm (13.7")
4. Paper roll inner diameter: 3"
5. Air cylinder drive unit
6. Paper guiding roll and shaft
7. Auto tension control
8. Unwinding tension using magnetic powder control system (20 kg)
9. Automatic EPC correction system
10. Slitting device

2. Main machine part

1. Shaft: Trough steel and high-quality steel plate structure in 10mm thickness
2. Main machine adopts frequency control (3 KW)

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



3. Traction device

1. Structure style: active traction and passive press fasten style
2. Based seat is casting structure (1set)
3. Traction roller is rubber roller (Spec: 2unit ϕ 85×1450mm)
4. Press fasten style: controlled by pneumatic
5. Press fasten cylinder: (2unit ϕ 40×20mm)
6. Transmission guide roller: aluminum guide roller (Spe.: 5unit ϕ 74×1450mm)
7. Traction motor adopts servo motor 3kw, Drive in-phase fix the length
8. Length can be adjustable by micro-computer
9. Traction adopts frequency control (1.5 KW)

4. Material delivery structure

1. Adopt servo motor control system Inovance brand
2. Drive style: drove by main motor and traction through active roller
3. Transmission: adopts triangle belt and belt wheel together structure
4. Material-delivery: adopts floating backrest structure for buffer action to keep material
5. Floating upper and lower tension adopts pneumatic traction Cylinder
6. Floating guide roller: adopts aluminum guide roller
7. Whole material-delivery structure will be controlled by displacement sensor

5. Cutting Unit

1. Cutting style: fix well the lower cutter and cut actively by upper cutter
2. Cutter holder: adopts casting heavy style structure
3. Lubricating oil can be recycled using
4. Both upper and lower cutters adopt bar style imported steel cutter
5. Cutting blade (Spec. Thickness x width x Length: 15×80×1450mm)
6. Cutter position can be adjustable by hand
7. Active transmission style: main motor transmission equipped with derailleur enable centrifugal wheel joined with connecting pole to run cutter reciprocating

6. Paper sheet collection

1. Automatic sheet collection
2. Lifting motor adopts 1.5kw frequency converter adjusting speed
3. Lifting automatic with sensor inspecting, auto lifting down
4. Right and left stacking adopts DC motor, the width stacking can be adjustable

7. Electrical control part: (PLC Control)

1. The whole machine adopts PLC control
2. The electronic original adopts the French "Schneider" brand
3. The system designed with Inovance

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	ZHQ-1400B
Max. width of cutting	1400mm
Cutting thickness	60-500 grams (0.06~0.50mm) (depending on different materials)
Max diameter of material (shaftless)	Φ1400mm (Maximum 1000kg)
Length of cutting	0-1200mm
Speed	160 times/min
Precision of fixed length	±0.2mm
Total Power	9.5 kw (380V 50 HZ)
Weight (approx.)	3200KG
Overall dimension (LxWxH)	5600mm×2200mm×1800mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Main Function Specifications

Name	Specification	Qty	Brand
Steel body	10mmThickness 10mm	1 set	Shanghai Baosteel
Air shaft	Φ3inch	1 strip	Shanghai
Rubber press roller	Φ85*1450mm	4	Imported silicon rubber, hardness can be 70-degree, precision G1.6 grade
Aluminum roller	Φ75*1450mm	1 batch	Hard oxidation treatment, dynamic balance 500m/min, precision G1.6
Servo motor	4.4KW	1 set	Inovance
Traction speed motor	3KW	1 set	Shanghai
Unwinding Traction speed	1.5KW	1	Shanghai
Frequency inventor	3KW	1	Inovance
Frequency inventor	1.5KW	1	Inovance
7-inch true color touch screen		1	Inovance
Stacking unit		1 set	
EPC MOTOR		1 set	ARISE
Sensor		2 set	ARISE
PLC		1	Inovance
Unwinder brake	20KG	1	HUAGUANG
Bearing		1 batch	HRB
Pneumatic parts		1 batch	Shanghai Estar
Low voltage electric part		1 batch	Schneider
Low voltage electric part		1 batch	Chint
Slitting knives		3 set	Shanghai
Paper edge blower		1 set	Shanghai

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

