


KFQ-2000

Bare Frame Style Automatic Slitting and Rewinding Machine



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

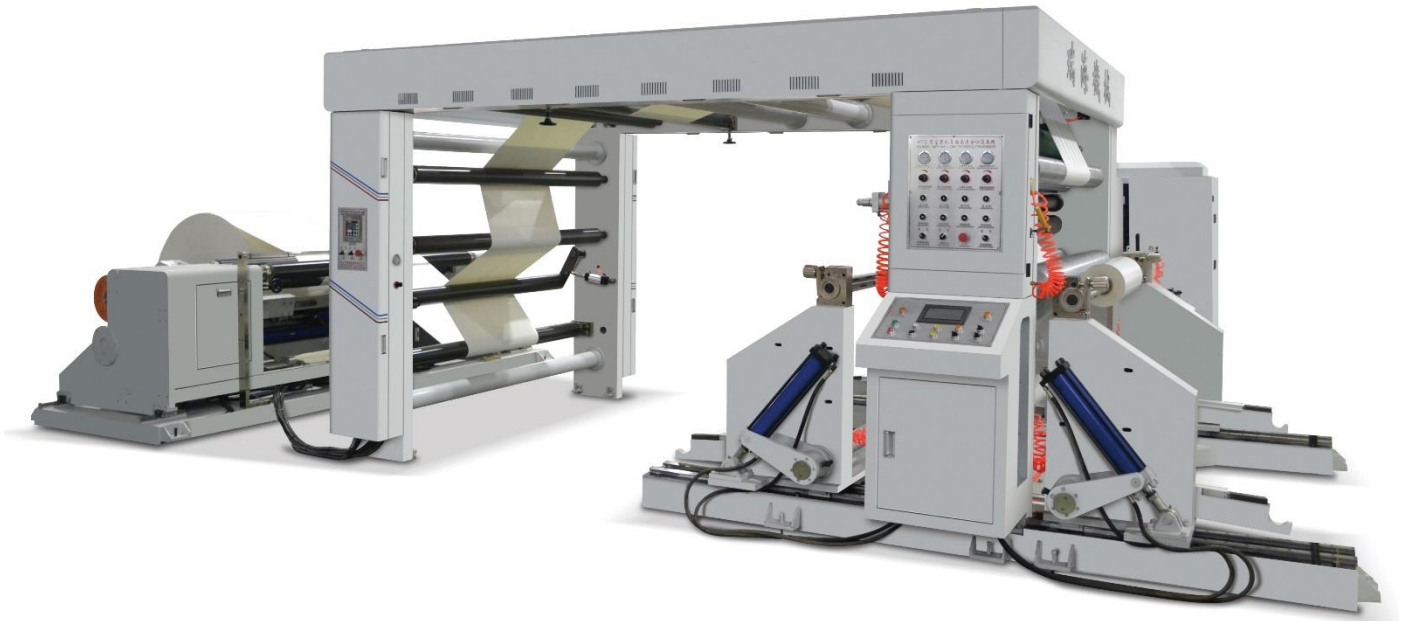

PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Machine Introduction

Features:

Unwinding Part

1. Adopts shaftless hydraulic fixing system, easily for one-person operation. Using special conic node system from 3" to 6" for durable using. The 2 sides clamping arm are controlled by the hydraulic dovetail groove linear guideway. 2pcs of hydraulic clamping oil cylinder moves to each side at the same time, easily operation.
2. 2pcs of hydraulic type loading and unloading material oil cylinder can bear 5T material to save the manpower and time.
3. It does not need to input the material thickness; the proximity switch can inspect the unwinding diameter directly which near the transmission shaft. The machine can slow down according to the rest material, in this way, the worker can prepare for the next roller. The unwinding tension adopts the sensor close-cycle automatic tension, controlled by PLC.
4. With the manual adjustment system, the unloading material tightness can be controlled. The adjustable range: +/-20mm
5. Automatic error-correction for the edge position is controlled by the system. The whole frame adopts guide way type to move left and right which driven by the servo motor. The moving part uses thread screw.
6. Bridge type feeding materials
7. The unwinding adopts the Italy pneumatic braking. Precision proportional valve use SMC

Main Body Part

1. The bare frame uses the 80# casting material, easily for dismounting and transportation.
2. The transmission combines the servo motor with synchronous wheel speed ratio.
3. Automatic traction device adopts pneumatic pressure way. The servo motor drives the mirror roll.
4. Close-cycle vector control.

Rewinding Part

1. With double structure of surface rolling and center rolling, rewinding by front and back (A/B shaft), double air shaft way (also can be single rewinding).
2. Clamping arm uses imported dovetail groove linear guideway
3. The rewinding shaft clings to the steel shaft (the steel shaft is driven)
4. Each bearing with 1 set of 22KW servo motor to drive the air shaft. The tension decided by the roll diameter. PLC controls frequency converter automatically to adjust the tension of the air shaft to make all the sheet same thickness when do the multiple slitting. Because of the press roller, all the reels end face is smooth. it has the choice of pneumatic press roller and self-weight press roller. The degree of the tightness of the finished products can be adjustable. With the increasing of the rewinding diameter, the servo motor speed goes down to extend the life of the air shaft.
5. It also can choose the whole shaft tension and the servo motor in torque control mode in PLC
6. Discharging type: automatic hydraulic
7. Wastepaper recovery device: Using motor to blow out the wastepaper more than 20m. (also can choose the automatic tatter function,). The net cage should be prepared by customer.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



KFQ-2000 Bare Frame Style Automatic Slitting and Rewinding Machine

Technical Specifications

Model	KFQ-2000
Material type	White board paper, carbon-free paper, coated paper, two-side offset paper, etc.
Material thickness	60-350g (paper)
Max. Diameter of raw material	1600mm
Raw material paper core	3#, 6# paper tube
Max. Width of raw material	2000mm
Minimum width of raw material	500mm
Roller surface width	2050mm
Width of slitting	50-2000mm
Rewinding paper core	3#
Max diameter of rewinding	1500mm
Error-correction length	150mm
Precision	±0.15mm
Max. Speed	400m/min
Slitting speed	10---350m/min
Total power	70KW
Total weight	17000kg
Dimension	length 7500mm, width 3800mm, height 2400mm
Slitting tools	15 sets for standard, also can do according to customer's requirement.
Upper splitter dimension	Φ160x120x50mm
Bottom round cutters dimension	Φ150x120x20mm
Rewinding shaft	with 2 pcs of 3# air shaft
This equipment is with	15pcs of Φ120 aluminum roller, 1pcs of rubber roller and 1pcs of steel roller. With 2pcs of round cutter shaft.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



Configurations

Name	Specification	Qty	Brand name
Casting frame	Thickness of wallboard 80mm	1set	
3-inch air shafts		2 pieces	Shanghai Qingbang
Main traction roll (mirror steel roller)	Φ150*2050mm	1pcs	Hard chromium plating with glazing. Dynamic balance 500m/min. Precision G1.6
Rubber press roller	Φ120*2050mm	1pcs	Imported silica gel, the hardness reach to 70degree, Dynamic balance 500m/min. Precision G1.6
Hardness aluminum oxide running roller	φ120*2050mm	15pcs	Hardness oxidation treatment, Dynamic balance 500m/min. Precision G1.6
Rewinding servo motor	22KW	2sets	zhima
Traction servo motor	18.5KW	1set	zhima
Unwinding magnetic powder clutch	20KG	2sets	Wenzhou
Motor for blowing the slitter edge	5.5KW	1set	Wenzhou
bearing		1 batch	HRB (guider roller) NSK (traction roller)
Pneumatic part		1 batch	SMC
Electric proportional valve		2pcs	SMC
Simulation error-correction		1set	Enrisse
PLC	SIMATLC S7-200 SMART	1pcs	SIEMENS
10" touch screen	TPC1061Ti	1pcs	MCGS
Proximity switch		1pcs	OMRON from Japan
Low-voltage apparatus		1 batch	Schneider
Power supply	S100-24	1pcs	Taiwan meanwell
Linear Guides		1 batch	Bank of Taiwan

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

