


QZYK 92/115/130/137/155/166/186C

Program Control Paper Cutter Series Machine

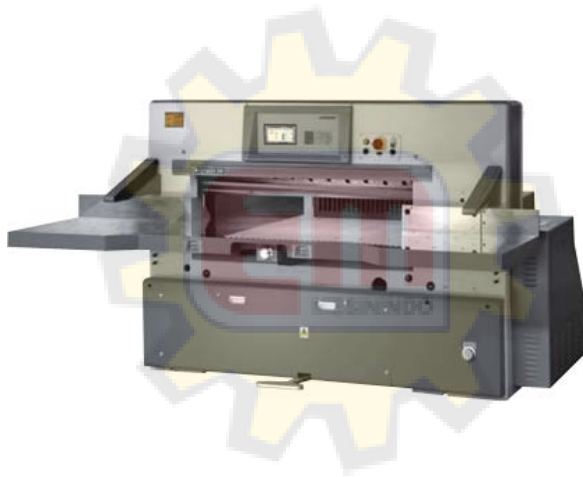


Graphic Machinery

Paper Cutting Machines

01 Description

It equipped with Japan AC digital servo controlling technology and 7.7 inches colorful display screen, the data resolution rate is 0.01mm, has self-diagnostic function of troubles and displays the operating pattern, It has 100program units more than 5000 different cutting position the max paper- pushing speed is 5-16m/min. It adopts stronger computer operating system. It can memorize store the storage time can be up to 200000 hours above. It has self maintenance to the operating system. Adopt Japanese hydraulic components, Japan and Korea electric components, Taiwan ball lead screw and linear guide-rail are used. PLC controller can monitor all the electrical and mechanical section. Its key parts adopt imported bearing of low maintenance.

02 Configuration

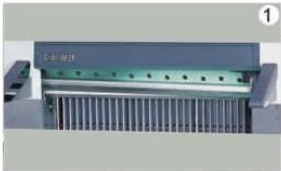

Safe raster, two time test function to improve the safe factor.



Ejecting device of knife holder



Original Japanese Servo Motor



Imported electrical use the Schneider Mitsubishi LG



Safety and convenient knife replacement device



The optical knife alignment make cutting more convenient.



Flat worm speed reducer driving



Slotless double guide-rail working table
Imported ball lead screw
Imported linear guide rail



Safety device for overloading cutting
Over-loading protection switch

03 Features

- 01 Ball lead screw and linear guide-rail makes paper impeller run smooth, low noise, accurate positioning, enhance the cutting precision and speed greatly, prolong the service life of paper cutter.
- 02 The working tables are all chrome-plated and equipped with air balls which makes paper-pushing easily and rusty-proof. Large side working table (1000*800) is optional.
- 03 IR photoelectric protection, buttons by two hands safety devices.
- 04 Safety device for knife bed, overloading protection for cutting, automatic return safety device.
- 05 Imported hydraulic components are adopted in hydraulic system, the pressure can be adjusted. The paper is pressed twice by pressure-increased system.
- 06 Mechanical assistance device for knife replacement makes knife replaced quickly and safely.
- 07 Equipped with the optical knife alignment to make cutting more convenient.
- 08 PLC control system.
- 09 Ejecting device for knife bar.
- 10 Flat worm speed reducer transmission.
- 11 Multination language operation interface.
- 12 Carry on the block programming operation through the figures and diagrams operation manual.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012

QZYK 92/115/130/137/155/166/186C

Program Control Paper Cutter Series Machine



04 Technical Specification

Model			92CG	78	92	115	130	137	155	166	186
Cutting width	L	Cm/In	92/36.2"	78/30.7"	92/36.2"	115/45.3"	130/51.2"	137/54"	155/61"	166/65.4"	186/73.2"
Max. cutting height without assistance pressing plate	K	Cm/In	11/4.3"	13/5.1"	13/5.1"	16.5/6.5"	13/5.1"	16.5/6.5"	16.5/6.5"	16.5/6.5"	16.5/6.5"
Max. cutting depth	D	Cm/In	93/36.5"	78/30.7"	93/36.5"	115/45.3"	130/51.2"	145/57"	155/61"	166/65.4"	195/76.8"
Min cutting depth without assistance pressing plate		Cm/In	2.5/1"	2.5/1"	2.5/1"	3/1.2"	3/1.2"	3/1.2"	3/1.2"	3/1.2"	3/1.2"
Extended length of working table	J	Cm/In	65/25.6"	64/25.2"	65/25.6"	73/28.7"	73/28.7"	74/29.1"	75/29.5"	75/29.5"	75/29.5"
Height of working table	G	Cm/In	86/33.9"	86.5/34"	86.5/34"	89/35"	86.5/34"	91/35.5"	90/35.5"	90/35.5"	90/35.5"
Machine width including side working table	A	Cm/In	192/75.6"	215/84.6"	233/91.7"	266/104.7"	266/104.7"	287/113"	314/123.6"	322/126.8"	375/147.6"
Total length of working table	F	Cm/In	198/78"	178/70"	198/78"	226/89"	241/95"	259/102"	280/110.2"	283/111.4"	355/139.7"
Cutting speed		r/min	30	45	45	45	45	45	42	42	40
Max. paper pressure		N	30000	30000	35000	40000	40000	45000	55000	60000	65000
Power of main motor		Kw	2.2	3	3	4	4	5.5	5.5	5.5	7.5
Motor for paper feeding		Kw	0.37	0.37	0.37	0.55	0.55	0.55	0.75	0.75	0.75
Air pump		Kw	0.55	0.55	0.55	0.75	0.75	0.75	0.75X2	0.75X2	0.75X2
Machine weight		Kg	2200	2600	2900	4600	3900	4500	5000	5500	6600
Overall dimension (LxWxH)		In	90x56x73"	83x56x77"	89x56x77"	101x63x85"	103x61x77"	111x63x85"	117x65x85"	124x63x85"	134x72x91"
Blade specification (LxWxH)		In	43.3x5x0.5"	37.8x5x0.5"	43.3x5x0.5"	54.7x6.3x0.54"	59.8x5x0.5"	63.2x6.3x0.54"	70.3x6.3x0.54"	75x6.3x0.54"	83.5x6.3x0.54"

Model	QZYW-C	QZYK-C	QZYK-S	QZYX-C	QZX-CG
Imported ball lead screw	★	★	☆	○	○
Imported double guide-rail slot-less working table	★	★	★	★	★
Chrome-plated main and assistance working table with air ball	★	★	★	★	★
IR photoelectric protection and hands operating protection	★	★	★	★	★
Ejecting device for cutting stick	★	★	★	★	★
Inside electronic knife locker	★	☆	○	○	○
Safe and convenient knife replacement system	★	★	★	★	★
Overloading protection device for cutting	★	★	★	★	○
Flat worm speed reducer transmission	★	★	★	★	○
Optical knife alignment	★	★	★	★	★
PLC control system	★	★	○	○	○
Imported hydraulic system	★	☆	☆	☆	○
Imported electric components	★	★	★	★	★
Soft pressure	★	☆	☆	○	○
Enlarge side working table	☆	☆	☆	○	○

★ Standard configuration ☆ Optional configuration ○ Without this configuration

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012