




Machine Introduction

MHK-1050AT Automatic Hot Foil Stamping & Die Cutting Machine is used for carton box, label die-cutting, foil stamping and embossing especially on all kinds of exquisite printing materials such as the wine box, cigarette box, gift box, and the household appliance box, cosmetics box to achieve 3D and exquisite effect.

Partial Introduction

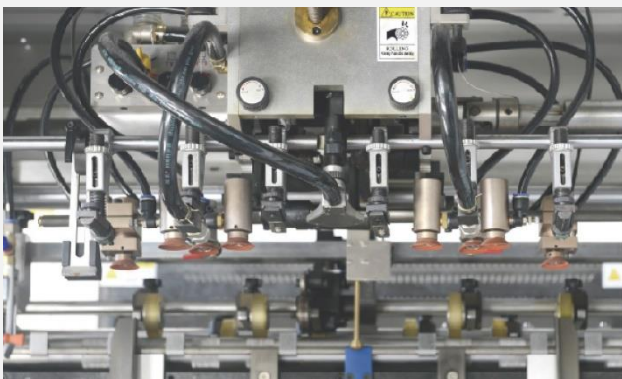

Feeder unit

Four pick-up and four forward suck heads with angle adjustment to handle different kinds of materials.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657





Feeding table

Synchronizing device to adjust the sheet positioning to the front lay by hand during production, sheet hold-down device (guiding the sheets to the front lays).

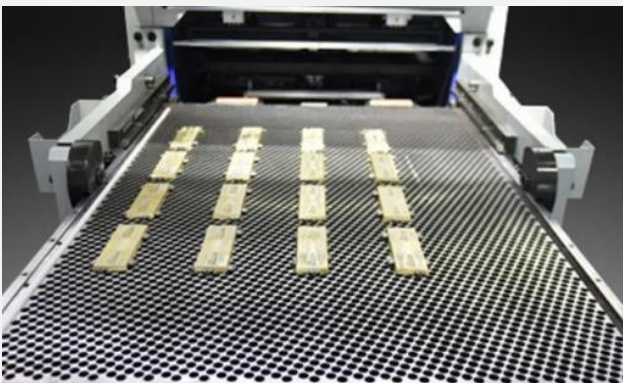

Hot stamping section

Heating base with 20 heating zone each temperature adjustable individually for efficient and accurate temperature control.



Foil advancing unit

Three sets of longitudinal foil advancing shafts and two sets of lateral foil advancing shafts are driven by servo motors individually programmable for short and long foil stepping.

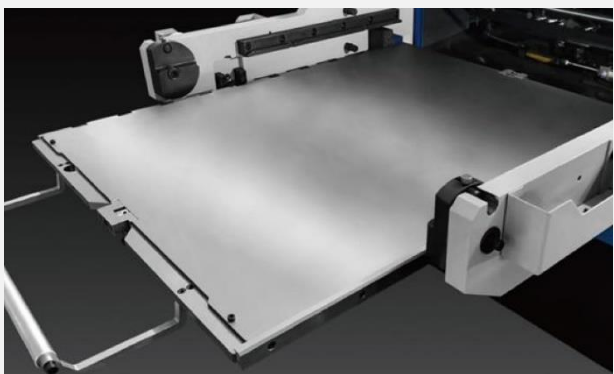


Plate setting

5mm hardened stamping plate or 3.5mm + 1.5mm sandwich stamping plate on top of 15mm precision ground supporting base plate with ± 0.9 mm micro adjustment in both running and cross direction for quick set up and easy make ready.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



Torque limiter

Taiwan high precision intermittent segmentation ensure high positional precision for long time usage. Taiwan torque limiter can accurately protect the artificial operation accident to guarantee the people and machine safety by its sensitive limit protection performance.



Main motor lubrication system

Taiwan made automatic oil pump cooling circulation system to ensure main motor lubrication of high speed for a long time. Equipped with oil pressure gauge and with oil pressure alarm device.



Delivery unit

Automatic delivery with non-stop curtain. This curtain moves into the delivery to catch the arriving sheets during the pile exchange. two blowers for paper collection can ensure neat collection of thin and thick papers.



Electrical unit

Adopts electrical components of world-famous brands (MOELLER\OMRON) for better performance and in time and local after-sale-service and maintenance.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



Germany vacuum pump
Germany Becker oil free blower and vacuum pump.



Auto lubrication system
Adopt concentrated auto lubrication system to make sure the driven parts working better.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	MHK-1050AT
Max. sheet size	1050x750mm
Min. sheet size	400x360mm
Max. cutting size	1040x720mm
Max. hot stamping size	1040x720mm
Max. embossing Area	1040x720mm
Min. gripper margin	9-17mm
Inner chase size	1140x755mm
Stock range	Paper: from 90 to 2000g/m ² , 0.1~2mm, corrugated board: up to 4mm
Die cutting accuracy	≤±0.075mm
Common stamping accuracy	≤±0.075mm
Hologram positioning stamping accuracy	≤±0.075mm (optional)
Embossing accuracy	≤±0.075mm
Max. die cutting force	600T
Max. working speed	7500s/h (Die cutting); 7500s/h (Hot stamping); 7500s/h (Hot pressing)
Max. feeder pile height	1600mm (with wooden pallet)
Max. delivery pile height	1400mm (with wooden pallet)
Max. gold foil diameter	250mm (vertical)
Electric-heated system	20 temperature ranges, 40-180°C is adjustable
Foil width	20-1020mm
Machine Dimensions (LxWxH)	6658x4317x2871mm (L: paper prepared track included W: platform included)
Net weight of machine	20T
Main motor wattage	15kw
Full load wattage	56kw
Air requirement	Pressure: 0.6~0.7Mpa, Flow: ≥0.37m ³ /min (prepared by user)



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Drawing

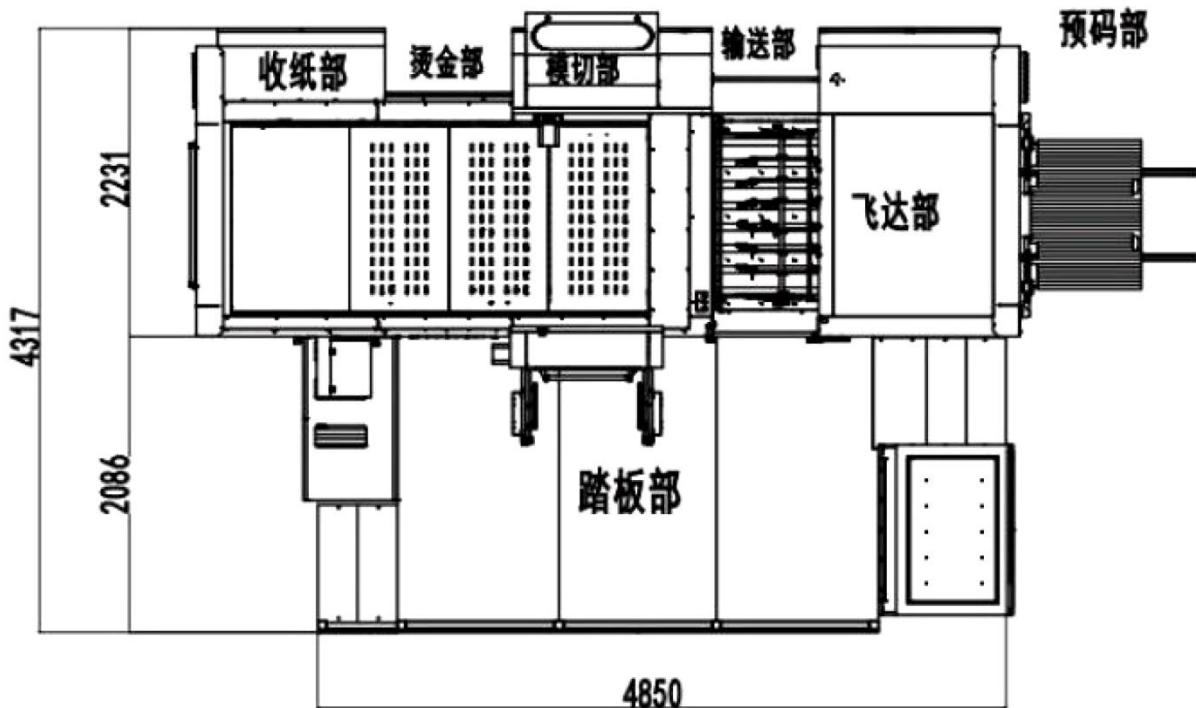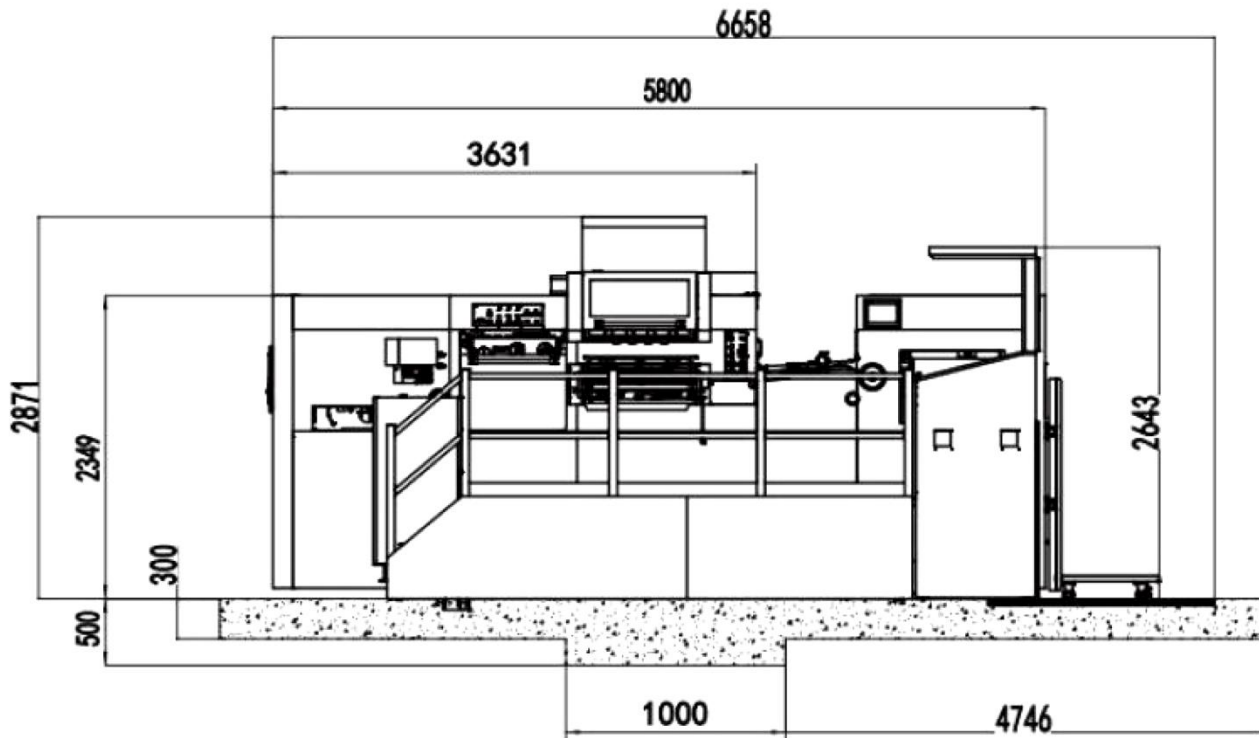

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

