



Machine Introduction

Single Axis AC Servo Driven Robots are extensively applied to horizontal plastic injection machines ranging from 50 ~550T which can take out the runners, runner and finished products from the mold of plastic injection molding machines. There are two types of arms-single stage and telescopic. The vertical strokes for single stage are 600/800 and for telescopic are 600/800/900/1000/1200mm. The arms move stably thanks to two sections of double speed structure. The traverse movement is driven by high performance AC servo motor.

Features:

1. High rigidity structure design, stable construction, low vibration, abiding and long service life.
2. Vertical and crosswise movement is driven by pneumatic cylinder. Traverse, crosswise and vertical unit adopt high precision linear guide way result in high speed and accurate position, high wear
3. Working with high precise linear guide way and imported steel wire belt driven
4. Assembled parts and structures design adopt oilless device, easy maintenance and long service life
5. Lightweight construction design to work with microprocessor well result in significant power saving
6. Module construction design, dismantled parts can be packed separately. This design is easy for assembling module parts no matter onto the operator side or non operator side on the spot directly if customers want to change
7. Electrical parts adopt the world famous brands to provide stable quality and interchangeable traits


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA

Product Structure Diagram

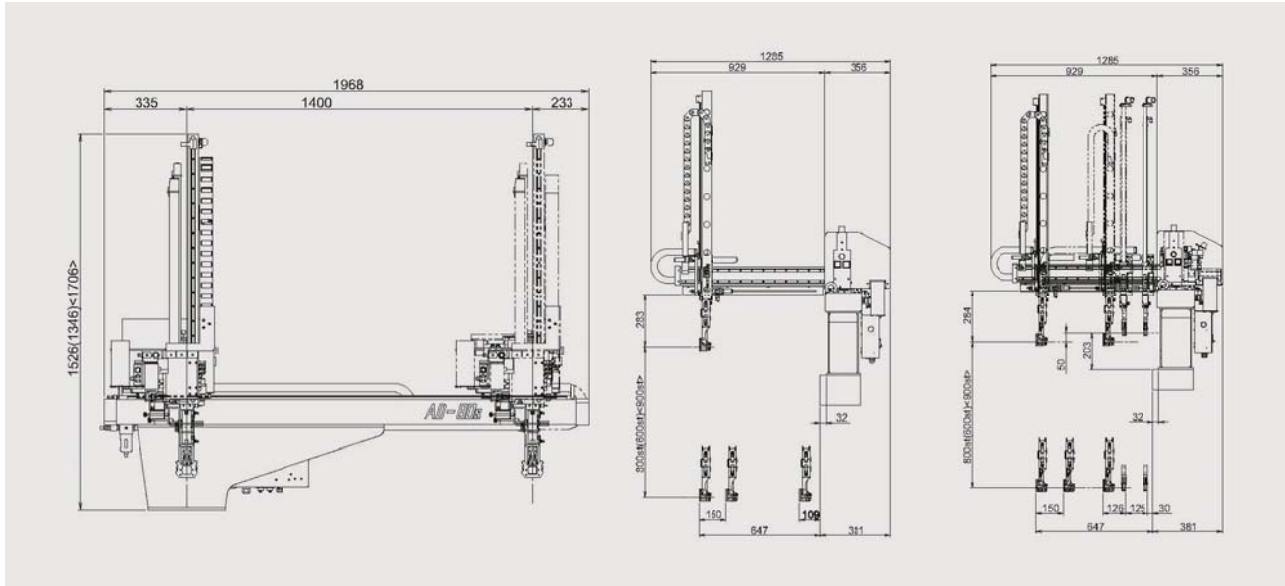

Specification of Single Axis AC Servo Driven Robot with Single-Stage Arm

Model	Stroke(mm)					Max. power consumption	Weight(Kg)		Air Consumption	precision	Voltage	Driven system	Working air pressure
	Main-arm	Sub-arm	Main-arm crosswise	Sub-arm crosswise	Tarverse	W	Main body	Max. loadNL	(NL/Cycle)				
AD-80	600 700 800 900		150		1200 1400	240	186	3	19	0.1	AC220V 50/60Hz	AC	0.5~0.7MPa
AD-80S		650 750 850 950		125			208		22			Vertical crosswise: air cylinders Traverse: AC servo driven motor	

Specification of Single Axis AC Servo Driven Robot with Telescopic Arm

Model	Stroke(mm)					Max. power consumption	Weight(Kg)		Air Consumption	precision	Voltage	Driven system	Working air pressure
	Main-arm	Sub-arm	Main-arm crosswise	Sub-arm crosswise	Tarverse	W	Main body	Max. loadNL	(NL/Cycle)				
ADW-80	600 700 800 900		150		1200 1400	280	231	3	28	0.1	AC220V 50/60Hz	AC	0.5~0.7MPa
ADW-80S		650 750 850 950		125			279		36			Vertical crosswise: air cylinders Traverse: AC servo driven motor	
ADW-120	1000 1200 1400		150		1400 1600	360	496	3	56				
ADW-120S		1050 1250 1450		125			532		72				

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA