



Machine Introduction

Features:

- Complete design, accurate installation, high stability, high security, low noise.
- Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability.
- High precision intermittent mechanism, high cutting precision, running steadily.
- Adopt European technology feeder, suction adjustable, steadily, precise, good paper applicability.
- Non-stop feeding, pre-stacking and delivery device can shorten the auxiliary time, improve the efficiency.
- Automatic pressure adjust system, pressure digital display.
- Human-friendly designed die frame and baseplate, makes installation, adjustment convenient.
- Pneumatic die locking device, die frame fixed more steadily, accurately, time saving.
- Front lay, side lay, feeding device fine tuning device, paper positioning more accurate,
- Double, crooked, empty optoelectronic position control, ensure the paper in the right position, reduce waste.
- Electronic control module design, adopt imported electronic components, ensure the accuracy and reliability.
- Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, trouble shooting more convenient.
- Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability.
- Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to let better durability.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Technical Specifications

Model	AEM-800Q
Max sheet size	820 x 620 mm
Min sheet size	340 x 280 mm
Max cutting size	770 x 600 mm
Die chase inner size	820 x 628 mm
Cutting plate size	826 x 628 mm
Min gripper margin	7 mm
Cutting precision	$\leq \pm 0.1$ mm
Max cutting pressure:	200 T
Max cutting speed	7000 S/H
Feeding pile height	1150 mm
Delivery pile height	1000 mm
Application	Cardboard: <0.1-2mm Corrugated paper:<4mm
Main motor power	11KW
Total power	16.25KW
Dimension	5150(+1360) x 1900(+1680) x 1880 mm
Weight	10T

Schematic Diagram:

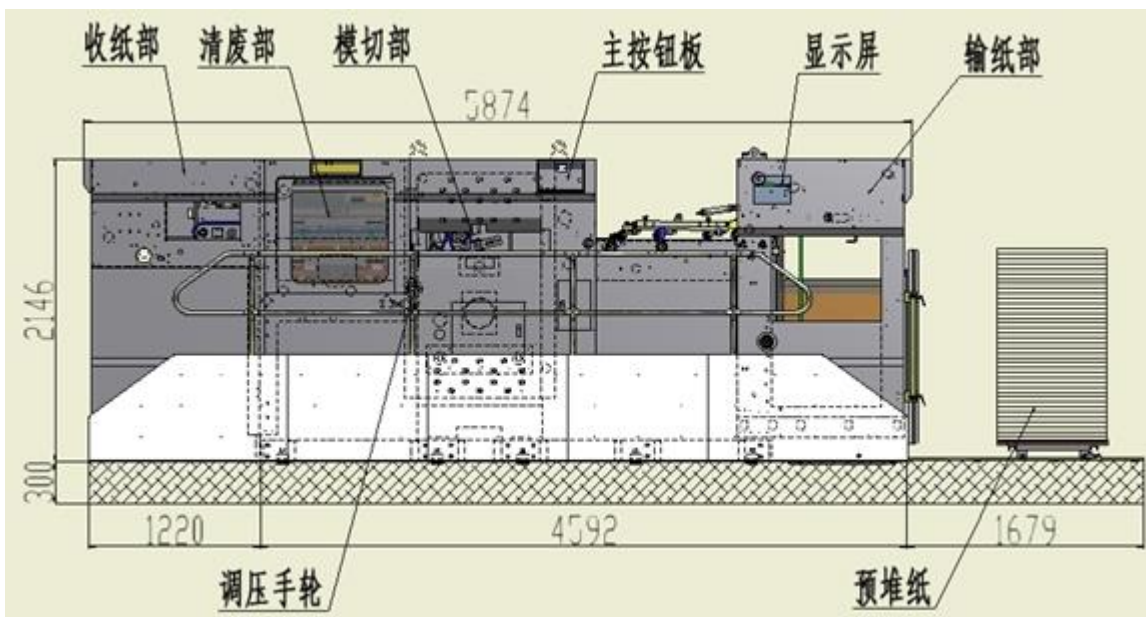


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

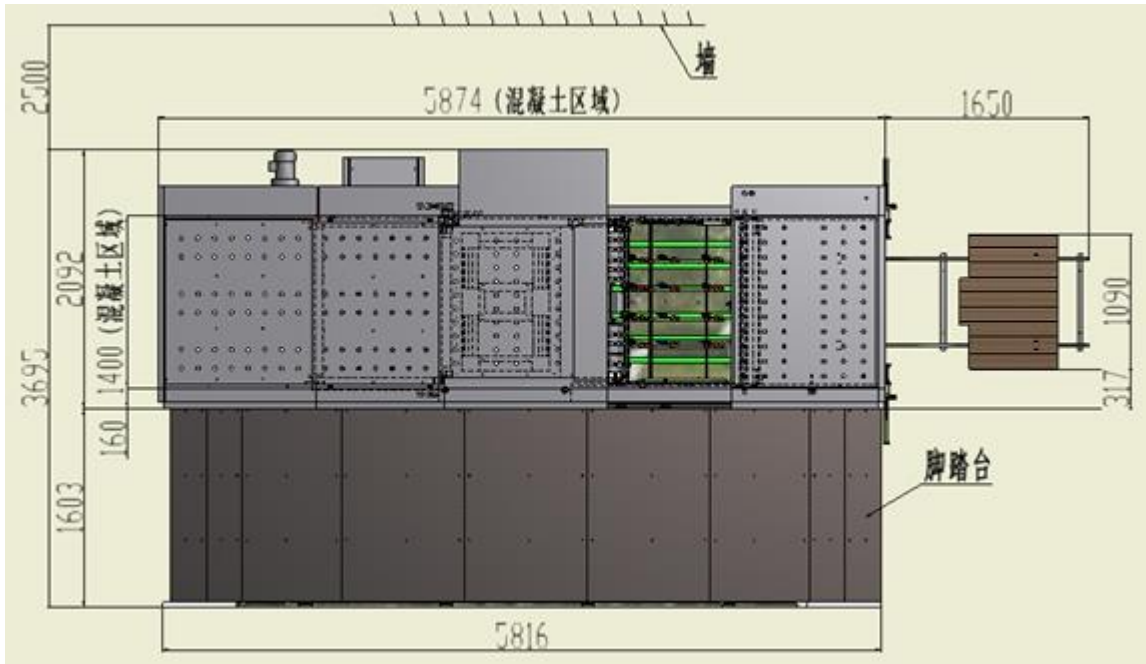

Configuration List

No	Name	Brand	Origin	No	Name	Brand	Origin
1	Main structure	QT500-7 ductile iron	China	15	Linear guide rail	HIWIN	Taiwan
2	Cutting plate	75Cr1alloy steel	Germany	16	Fastener	GEMYEAR	Taiwan
3	Worm, Worm gear	Xingtang	China	17	Invertor	Panasonic	Japan
4	Crankshaft material	Ni-Cr-Mo alloy	China	18	HMI	TAISEE	Taiwan
5	Gripper Bar	Aluminum alloy	China	19	Sensor	Panasonic	Japan
6	Gripper	Imported manganese steel	China	20	PLC controller	FATEK	Taiwan
7	Cam box	HANDEX	Taiwan	21	Encoder	Kubler	Germany
8	Main transmission chain	TYC	Taiwan	22	Proximity switch	FOTEK	Taiwan
9	Rotary joint	SMC	Japan	23	Relay	SCHNEIDER	France
10	Pneumatic solenoid valve	AIRTAC	Taiwan	24	Optoelectronic switch	Panasonic	Japan
11	Main motor	TECO	Taiwan	25	Button	SCHNEIDER	France
12	Feeding pile motor	CPG	Taiwan	26	AC contactor	SCHNEIDER	France
13	Delivery pile motor	CPG	Taiwan	27	Circuit breaker	SCHNEIDER	France
14	Bearing	NSK	Japan	28	Vacuum pump	TONGYOU	China

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Standard Configuration



Feeding Section

1. High speed and strength 4-suck-4 forwarder feeder, the angle of the nozzle can be adjusted according to the paper condition, it ensure that the thin thick and corrugated paper can be fed smoothly.
2. Both side blower device, make sure the paper can be separated and the paper be fed smoothly.
3. Wall plate for feeder is cast iron, stable and fit for high speed running.
4. Electro mechanical double sheet detector can reduce the waste.
5. Both side lay can be used both for pull and push function, equipped with opto-electronic sensor.
6. The press roller and the brush wheels can be integrated adjusted, improve the efficiency.
7. Anti-worn PU press roller.
8. Non-stop feeding device.

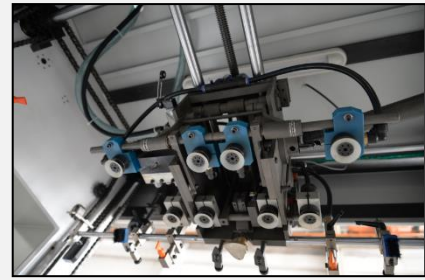

Die cutting section

1. The pressing section is made of high strength cast iron QT500, has high strength and never deform.
2. Special processed alloy crankshaft.
3. Extra anti worn worm and worm gear.
4. Pneumatic clutch, and imported rotary joint.
5. Oil pressure and air pressure alarm system, protect the machine.
6. High accuracy cam box, equipped with synchronized belt and torque overload controller.
7. Chase detector, increase the running accuracy; pneumatic chase lock device,

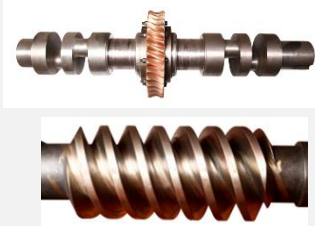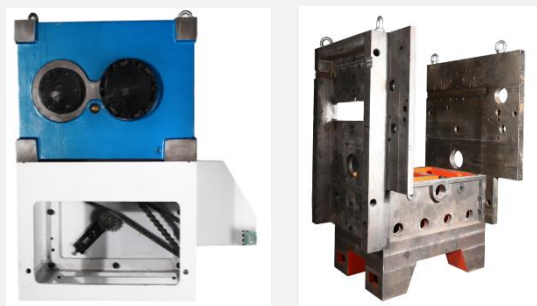

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**35⁺ YEARS
SERVING
INDONESIA**


electrical pressure adjustment, and convenient chase turning device.

8. Hi hardness die cutting plate(HRC50-53).
9. Imported pre-stretched gripper chain, increase the accuracy and stability, special side positioning.

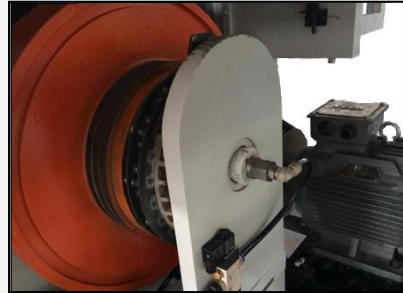

Stripping section

1. The stripping section is combined with upper, middle, lower three frames. The frames can be pulled out. It makes the adjustment more convenient and safe.
2. Stripping device can either be stripping pins or male/female plate.

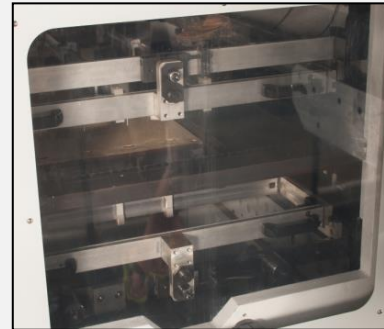

Delivery section

1. Automatic aligning device, double side blower device makes sure the thin and thick paper can be delivered neatly.
2. The touch screen at the delivery section indicate the running condition, the operations can be done on it.
3. There is a control panel at the delivery section, more convenient for operation.
4. The opto-electronic sensor at the delivery section can make sure the delivery smooth and neat.
5. Delivery automatic control system.
6. Automatic non-stop delivery device.
7. Gripper chain protection device.
8. Delivery fault alarm device.
9. Equipped with tag insert and counter.
10. Equipped with gripper bar drive chain tensioner buffer device.



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**35⁺ YEARS
SERVING
INDONESIA**