




Machine Introduction

The machine has both Chinese and western usages. Paper feed parts employ the structure of bottom air suction paper extraction, while air suction transport avoids double-feed phenomena. Automatic four edge indentation increase precision and reduces errors. Horizontal fold parts use roller air suction. Paper jams decreases and paper bags can go through the fence smoothly. Traditional system employs bearing, synchronous wheel and timing belt to cut the noise.

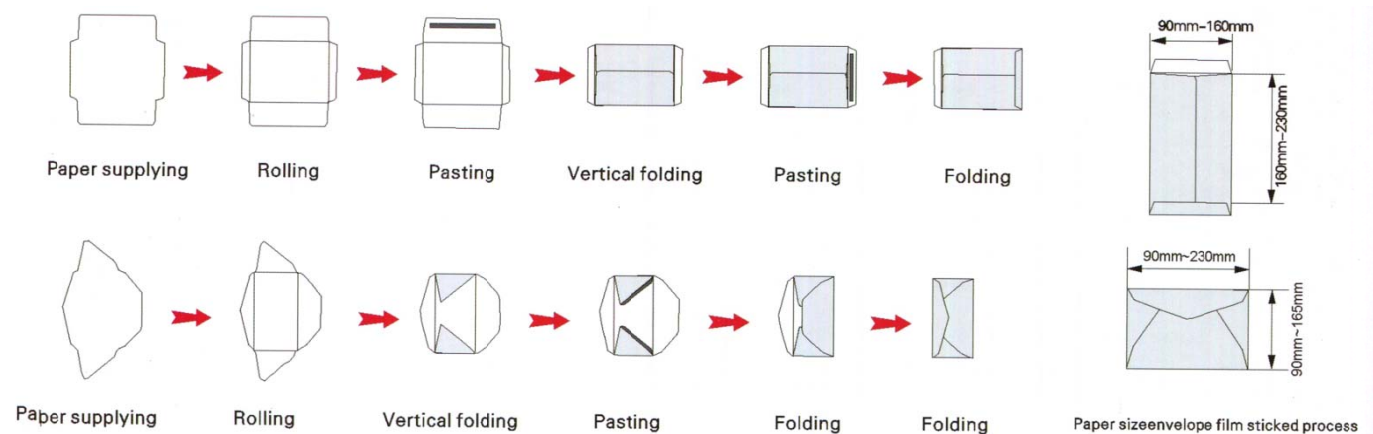

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA

Technical Specifications

Model	ZF-291
Max. operating speed	3000-12000 pcs/h
Range of processed products	100x100 - 160x230mm 90x90 - 230x160mm
Applied paper	80-157 g/m ²
Electricity capacity	4.5 kw
Machine weight	1200 kg
Machine dimension (LxWxH)	3000x890x1400 mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA