



### Machine Introduction

The fourth generation of MHC Series Automated manual die cutting machine (Tiptronic Die Cutting Machine) based on the third generation of Semi-automatic Die Cutting Machine with Front Conveyor Delivery Mechanism, is equipped with automatic feeder, including both manual paper feeding and automatic feeder paper feeding function. On condition of flat corrugated paper, automatic feeder paper feeding is accepted with raising efficiency and reducing workforce.

Manual paper feeding comes in handy on condition of uneven corrugated paper. This machine maintains multi-operational function, and its development is combined with advantages of similar products in domestic and overseas, is special equipment for packing products such as cartons and paper boxes.

Gripper bars with high intensity are applicable to all kinds of cardboard, paperboard and corrugated paper. Frontal, back and side registration mechanism ensures great precision of die cutting. Other parts are adopted such as intermittent mechanism with high precision, pneumatic clutch and pneumatic closed-up mechanism, programmable controller and man-machine interface.

The interface can display various digital information of machine such as working speed, amount of paper processed, total running time, etc. It is easy to eliminate troubles according to the display of trouble shooting.

Transducer is adopted to control the main motor in achieving step-less speed variation. This machine is equipped with sensors and safety device.

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**36 YEARS  
SERVING  
INDONESIA**

### Features:

1. Adopt nodular cast iron-QT500-7, the mainframe wallboard casting by special technology process, thus featuring by high strength, never deformation and ensure the safety of the mainframe wallboard.
2. Adopt Taiwan-imported intermittent mechanism to ensure that the machine operates accurately.
3. The whole machine all uses NSK imported original bearing.
4. The whole machine uses original parts imported from Germany Moeller, Japanese OMRON.
5. Key parts of gripper bars are imported from Japan.
6. The craft shaft is adopting Germany Ni-Cr-Mo metal steel, with high precision and will never deforms.
7. Use the centerline positioning system to realize fast plate changing of worksheet.
8. Equipped with Dayuan first-developed pressure automatic adjustment device, ensure fast and smooth when they adjust of die cutting pressure.
9. Die-cutting plate frame adopts auxiliary plate-installation device, to realize different of model machines can be use universal die-cutting plate.
10. Equip with touch-screen operation interface in both Chinese and English.
11. All adopt Japanese SMC pneumatic components to ensure every pneumatic action performs accurately.
12. The front and side gauge adopt photoelectric system.
13. Main motor from Germany Siemens, ensure stable operation.
14. Vacuum pump from Germany Becker, ensure paper feeding smoothly.

### Installation dimension of MHC-1650EC automated-manual die cutting machine with stripping

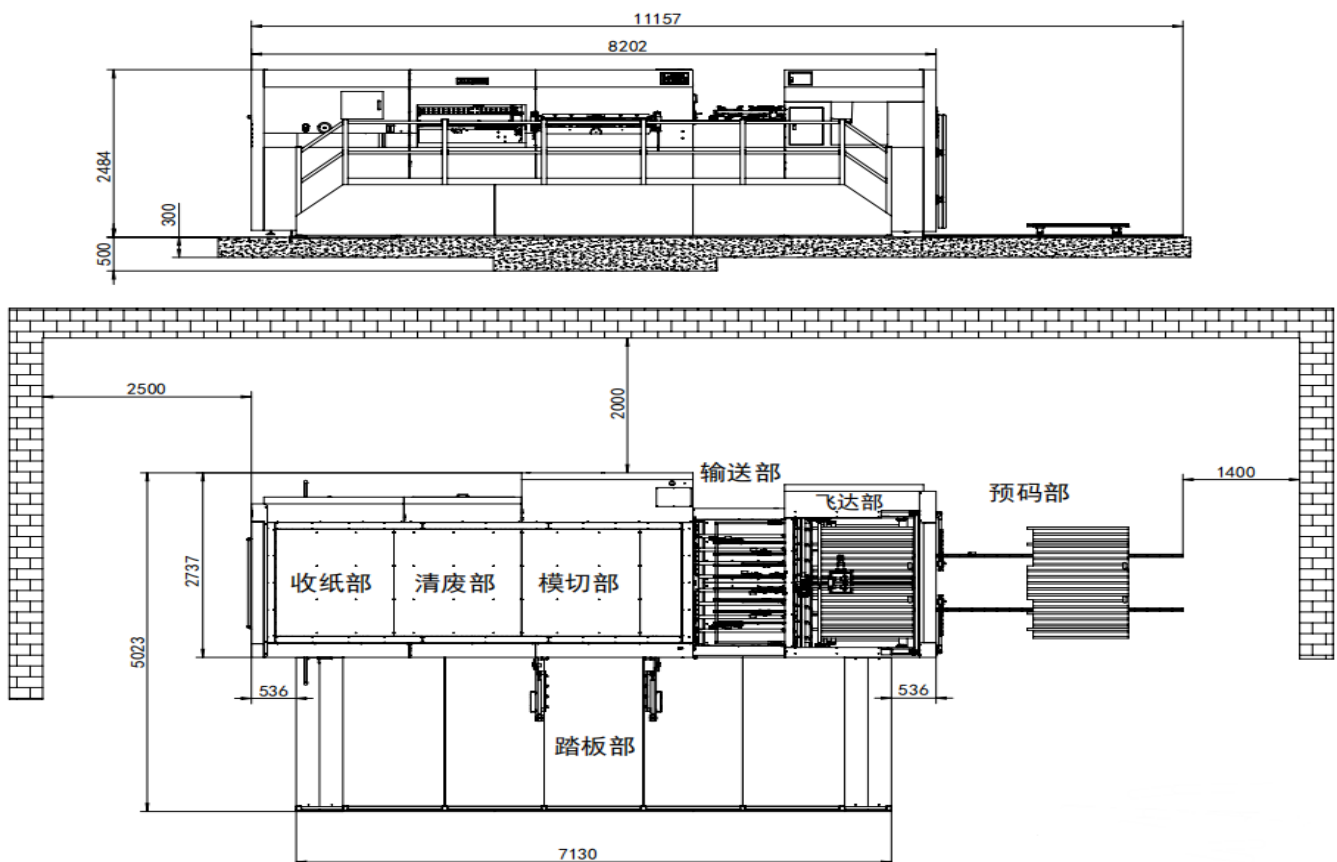

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**36 YEARS  
SERVING  
INDONESIA**

### Technical Specifications

|                                                                                     |                       |
|-------------------------------------------------------------------------------------|-----------------------|
| <b>Model</b>                                                                        | <b>MHC-1650EC</b>     |
| Max. Paper Size                                                                     | 1650x1200mm           |
| Min. Paper Size                                                                     | 550x500mm             |
| Max. Die-Cutting Size                                                               | 1620x1180mm           |
| Max. working speed                                                                  | 4000 (s/h)            |
| Rated power                                                                         | 19.7kw                |
| Max. working pressure                                                               | 300 (t)               |
| Machine weight                                                                      | 22 (t)                |
| Overall dimension (length: including pre-feeding track, width: including the pedal) | 11157x5023x2484mm     |
| Scope of application                                                                | Corrugated paper ≤7mm |

### Configurations

| No. | Name                                 | Brand                     | Place of Origin |
|-----|--------------------------------------|---------------------------|-----------------|
| 1   | Button                               | Eaton-Moeller             | Germany         |
| 2   | Circuit breaker                      | Eaton-Moeller             | Germany         |
| 3   | Motor protector                      | Eaton-Moeller             | Germany         |
| 4   | AC contactor                         | Eaton-Moeller             | Germany         |
| 5   | Air switch                           | Eaton-Moeller             | Germany         |
| 6   | Main motor                           | Siemens                   | Germany         |
| 7   | Die pressing base plate              | HIGH ALLOY PLATE          | Germany         |
| 8   | Crankshaft material                  | Ni-Cr-Mo METAL STEEL      | Germany         |
| 9   | Main drive chain                     | Iwis                      | Germany         |
| 10  | Cable line                           | TKD                       | Germany         |
| 11  | Rotary joint                         | OMPI                      | Italy           |
| 12  | Electromagnetic clutch               | OMPI                      | Italy           |
| 13  | Inverter                             | HUICHUAN                  | China           |
| 14  | Control center                       | HUICHUAN                  | China           |
| 15  | Wallboard and machine body structure | QT500-7 nodular cast iron | China           |
| 16  | Synchronous belt                     | Gates                     | America         |
| 17  | Man-machine interface                | 10.4TFT KUNLUNTONGTAI     | Joint venture   |
| 18  | Safety relay                         | Omron                     | Japan           |
| 19  | Photoelectric switch                 | Omron                     | Japan           |
| 20  | Proximity switch                     | Omron                     | Japan           |

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**36 YEARS**  
**SERVING**  
**INDONESIA**

|    |                                         |         |        |
|----|-----------------------------------------|---------|--------|
| 21 | Encoder                                 | Omron   | Japan  |
| 22 | Sensor                                  | Omron   | Japan  |
| 23 | Optical fiber                           | Omron   | Japan  |
| 24 | Air Cylinder                            | SMC     | Japan  |
| 25 | Air volume regulator                    | SMC     | Japan  |
| 26 | Main solenoid valve                     | SMC     | Japan  |
| 27 | Tooth row, tooth slice                  | KUI     | Japan  |
| 28 | Counting photoelectric                  | MEIJI   | Japan  |
| 29 | Main paper feeding motor                | DONGLI  | Taiwan |
| 30 | Lift motor of paper collecting platform | DONGLI  | Taiwan |
| 31 | Intermittent segmentation               | Handex  | Taiwan |
| 32 | Secondary chain                         | TYC     | Taiwan |
| 33 | Linear guide                            | Hiwin   | Taiwan |
| 34 | Worm and gear                           | WANCENG | Taiwan |

### Machine Features

#### 1. Feeder

- \* Precision feeder head that adopts European manufacturing technology, can be used for card paper, corrugated paper and grey board
- \* Four suction and four sent, the suction angle and height can be adjusted according to the deformation of paper
- \* Unique paper receiving mechanism, suitable for different deformed papers
- \* High-speed feeder head is specially manufactured for special aluminum alloy material, and all parts are imported
- \* Dual-feeder head anti-collision detection device
- \* Main and auxiliary paper feeding, can switch without stopping the machine
- \* A set of pre-feeding mechanism (optional)
- \* Fish scale type paper feeding, smooth and accurate
- \* Two-purpose paper feeding machine
- \* A set of auxiliary paper support device and two sets of paper supporting board



\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**36 YEARS  
SERVING  
INDONESIA**

### 2. Paper Conveying Platform

- \* Electromechanical dual-sheet detector
- \* Adopt advanced control system to control the speed of conveying device, making paper feeding smoothly and reducing collision
- \* Imported conveying paper belt
- \* Super wear-resistant polyurethane conveying paper wheel
- \* Adjustable rubber wheel and brush wheel, to ensure accurate positioning when they reached front gauge and side gauge
- \* Servo motor conveyor positioning device
- \* Three type of conveying:
  - 1.single piece of paper feeding function (for 4-8mm corrugated paper)
  - 2.two pieces of overlapping paper feeding function (for 2-4mm corrugated paper)
  - 3.multiple piece of overlapping paper feeding function (for to 250g-2mm paper)

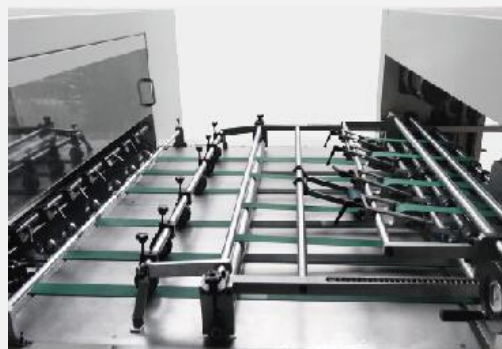


### 3. Front/Side gauge

- \* Front gauge detection, to guarantee the arrival rate of paper
- \* Adopt left/right dual push pull gauge way to meet different printing and alignment requirements
- \* Paper decelerating device



### 4. Die-Cutting Part

- \* Pressure-containing member adopts high-strength nodular cast iron-QT500 and special casting process, thus it has high strength and never deforms.
- \* The Ni-Cr-Mo metal steel crank shaft Through the special craft processing, imported from Germany.
- \* Super wear-resistant worm and gear imported from Taiwan
- \* Knife template turnover device that is convenient and fast
- \* Strong lubrication system
- \* High-precision 240-degree intermittent mechanism
- \* Pneumatic locking device, safe and fast
- \* High-speed rotary joint
- \* Maximum pressure reached 300t.
- \* Adopt advanced Germany Siemens motor
- \* Die cutting plate frame, adopting central positioning system and being equipped with micro-adjustment device

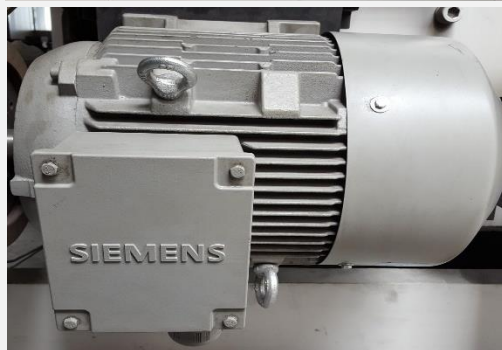

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

\* The whole machine uses original parts imported from Germany Moeller and Japanese Omron, in order to improve the operation quality




### 5. Stripping section

- \* Adopt upper and lower dual-frame stripping mechanism
- \* Adopt male/female template to realize various stripping
- \* Adopt central positioning device that matches with the die cutting part to reduce plate replacing time



### 6. Gripper bars

- \* High-quality teeth slice guarantees the speed of conveying paper, and strong wear-resistance.
- \* 5 sets of Super hardness and high strength titanium-aluminum alloy teeth rows
- \* England imported IWIS chain
- \* High-quality chain through pre-tensioning to guarantees long-term stable operation

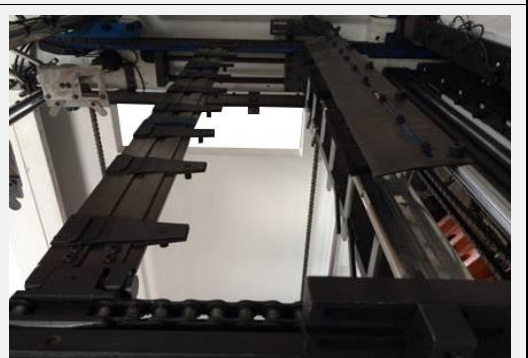

### 7. Paper Delivery Section

- \* Automatic paper aligning device
- \* Paper collection part is equipped with control panel to realize more personalized operation
- \* Paper collection photoelectric device, to ensure neat paper collection
- \* Automatic lift control system of paper collection platform
- \* The main chain protection device
- \* Prevent the paper returning device



\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**36 YEARS  
SERVING  
INDONESIA**