



Machine Introduction

Configurations & Functions:

1. **Automatic Feeder:** Adopts offset feeder with advanced pneumatic side lay, which fastest can feed around **13000 sheet/h**. Non-stop and pre-stack feeding can improve work efficiency.
2. **Overlapping Regulator:** Adopts Servo system to control the overlapping that guarantee accurate and stable, and make sure the overlap error within 2mm.
3. **Heating System:** Large heating roll by electromagnetic heating plus oil heating, guarantee the heating efficiency and make sure laminating quality when run in high speed.
4. **Main Machine Body:** Thicken machine wall (25mm thickness) enhances stability and for long time service life.
5. **Two rows' chains with gear box Driving System:** Special structure design in minimum transmission line, adopts chain with gear box to drive the laminating unit to guarantee the high laminating speed with low noise.
6. **Hydraulic Pressure System:** fully hydraulic system to control the laminating pressure, the pressure would highly uniform and easy to adjust.
7. **Man-Machine Interface System:** Advanced 10inch color screen with PLC system makes the operation easy and convenient.
8. **Anti-Curvature Device:** Avoid paper curvature and make the paper smooth, especially for thin paper.
9. **Corrugated Delivery:** Better and easier for collecting paper.
10. **Car Body:** Whole machine cover adopts car body, glossy and wear-resisting.
11. **Automatic Stacker:** Fully automatic with sensor to rise and down the paper pile, heighten structure that can load paper pile height in 1060mm, side and front tidy devices to make sure paper pile collect well.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



ZFM-800YA

Automatic Thermal Laminating Machine


Technical Specifications

Model	ZFM-800YA
Max. sheet size	780*1050mm
Min. sheet size	260*210mm
Paper thickness	80-500Gsm
Machine speed	70m/min
Working speed	60m/min
Machine power	26kw
Working power	15-kw/h
Dimension of machine	L9000×W2600×H2050mm
Machine weight	5000kg

Features:

1. Automatic Feeder

We adopt **offset feeder** head (max speed 13000sheet/ hour), that makes the sheet feed more stable and smoother. The feeder is non-stop type with pre-stack guide device, which can keep the machine running when run out the paper pile. High quality vacuum pump guarantees the stable feeding.

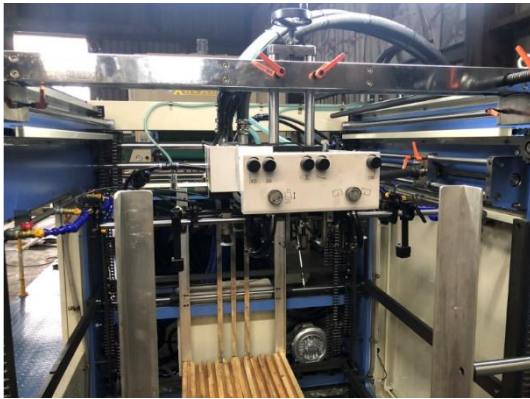

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657




2. Sheet Delivery Platform

Servo system to control the side lay and front lay connect with feeder in high precision, that guarantee the overlapping error within 2mm. Moveable gear adjustment sheet deliver table that convenient for different sheet size

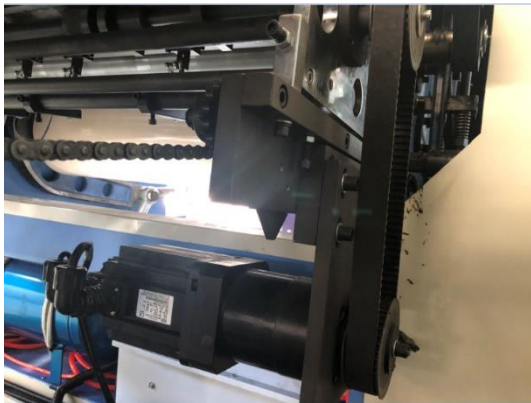

3. Laminating Unit

Heating roller by electromagnetic heating or oil heating, double heating systems guarantee the prompt pre-heating and make the temperature to 180°C and can keep constant temperature in high-speed laminating. Pressure rubber roller controlled by fully hydraulic system.

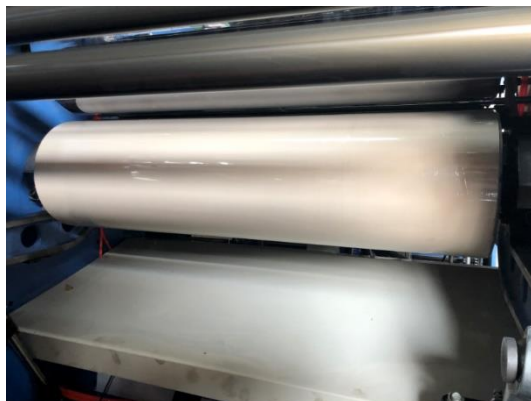

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



4. Heating system

Heating roller by electromagnetic heating plus oil heating, that makes the temperature to 180°C and can keep constant temperature in high-speed laminating. Pressure rubber roller, with automatic pressure regulation, which makes the laminating effect perfectly without bubbles, spots, or wrinkle.



5. Film Unwinding

Install air shaft for film unwinding with auto tension controller. Special design for big diameter film roll and the roll can be adjusted to right and left.




6. Waste Film Slitting and Rewinding

Moveable waste film rewinding to modify the jumbo film width that can fit for paper sheet size.




* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

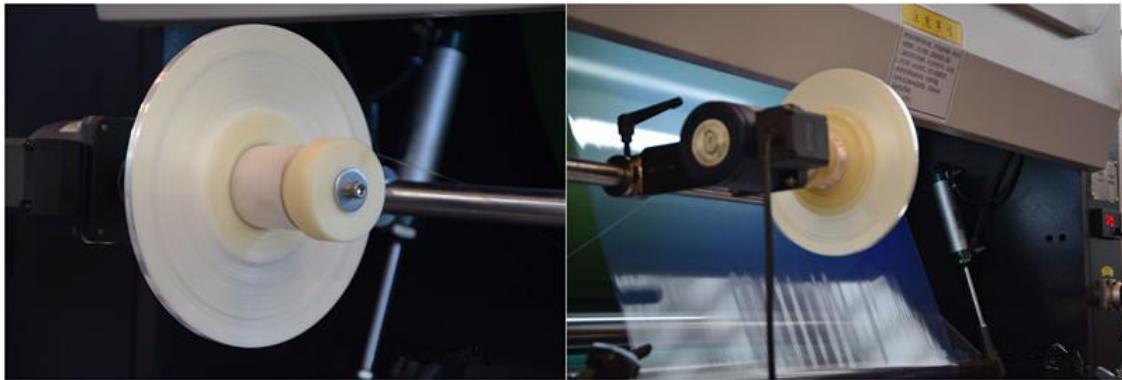


7. Disc Cutter with Pneumatic System

Multiple blades disc cutter for BOPP film with pneumatic sheet separating, that makes the laminated sheets without margin, and prepare for next process. Two sheeting roll system can effectively sheet paper, special concave-convex roll make sheet smoothly and anti-slip.

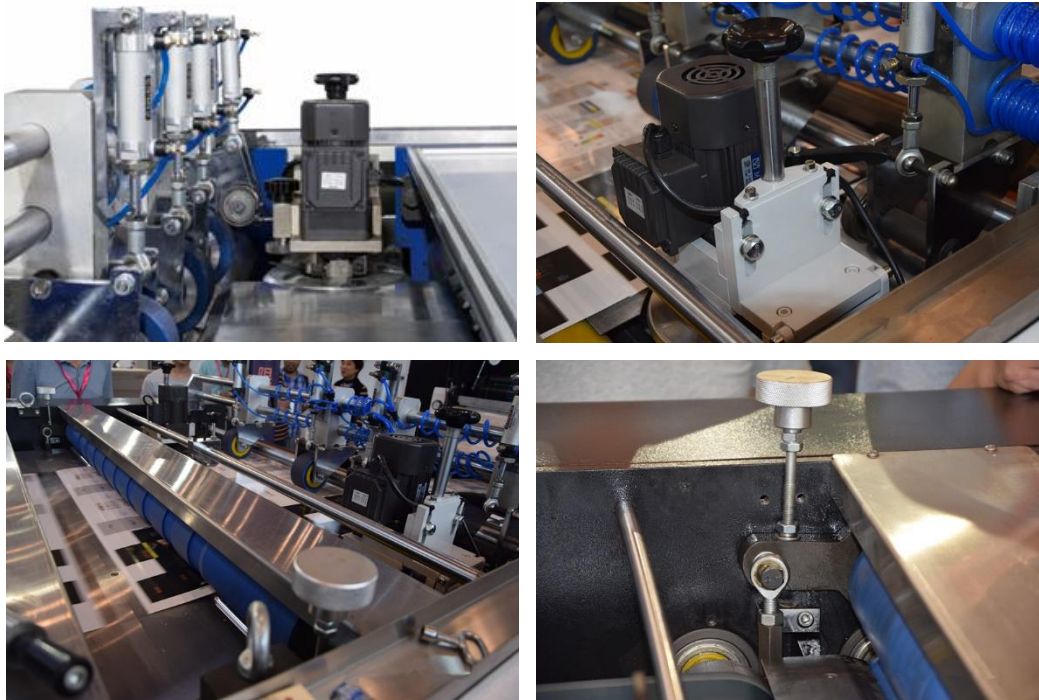

8. Sand Wheel


Sand wheel instead of disc cutter for middle side flim lamination, that prepare for pneumatic sheeting.

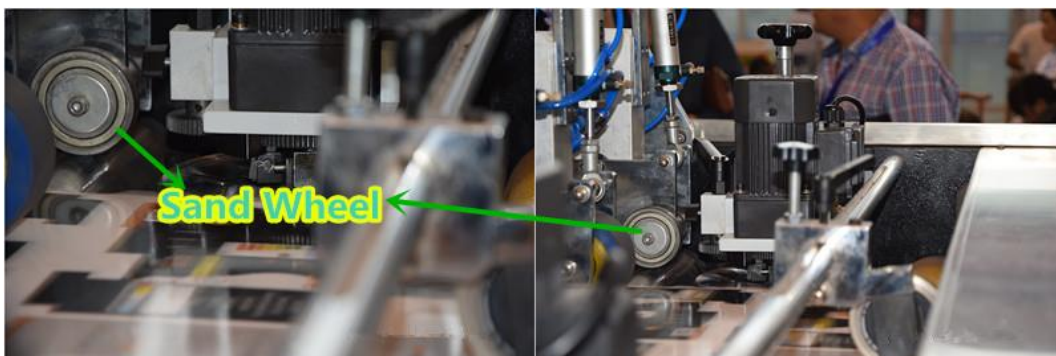

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

9. Two rows chain with gear box driving system

For the main laminating part adopts two rows chain with gear box driving system, that support machine run in high speed with high precision and low noise. This structure also support machine run in long time but keep stability.

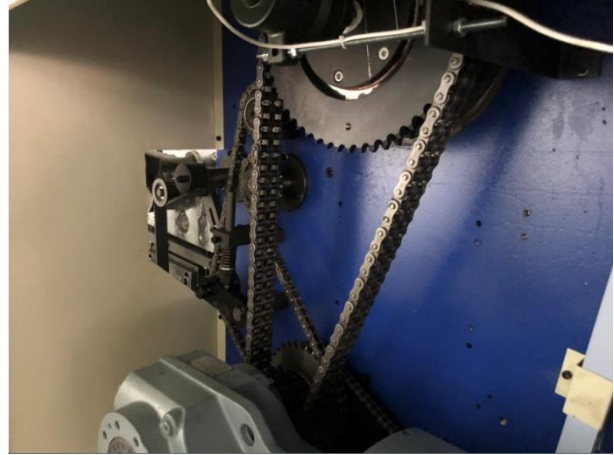

10. Pneumatic guiding system

Removable guide wheels with pneumatic system to adjust the pressure that easy to operate and maintain.



11. Corrugated Delivery

Corrugated delivery with conveyor belt that better and easier for collecting paper.



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.






PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



12. Automatic Stacker:

Fully automatic with sensor to rise and down the paper pile. Heighten structure that can load paper pile height in 1060mm. Side and front tidy devices to make sure paper pile collect well.

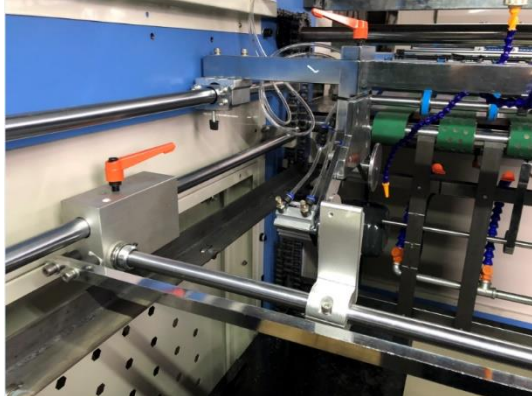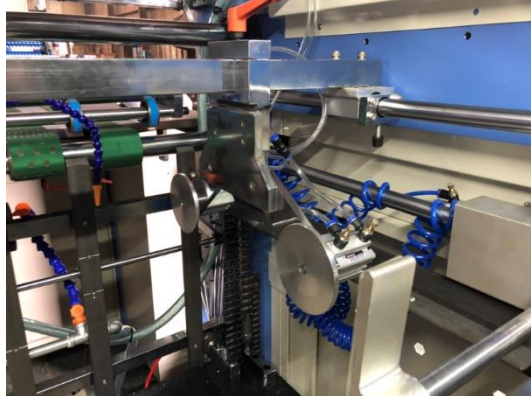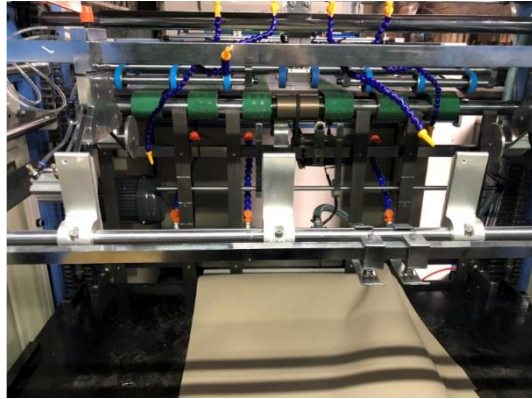

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

