


CWZD-400A

Heavy Duty Multifunction Laminated Bag Making Machine

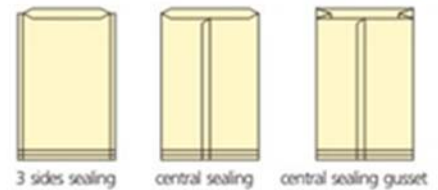


Machine Introduction

This laminated film bag making machine it is used for various kinds of laminated material, meanwhile, it also has side gusset of center sealing bag, can make four side sealing bag and five side sealing bag. (A Series do not have zipper bag design)

Features:

1. All of parameter display by touch screen.
2. It has EPC and double photocell tracking from unwinding.
3. Super length size, which has 6 times skip feeding design.
4. Automatic waste film rewinding unit

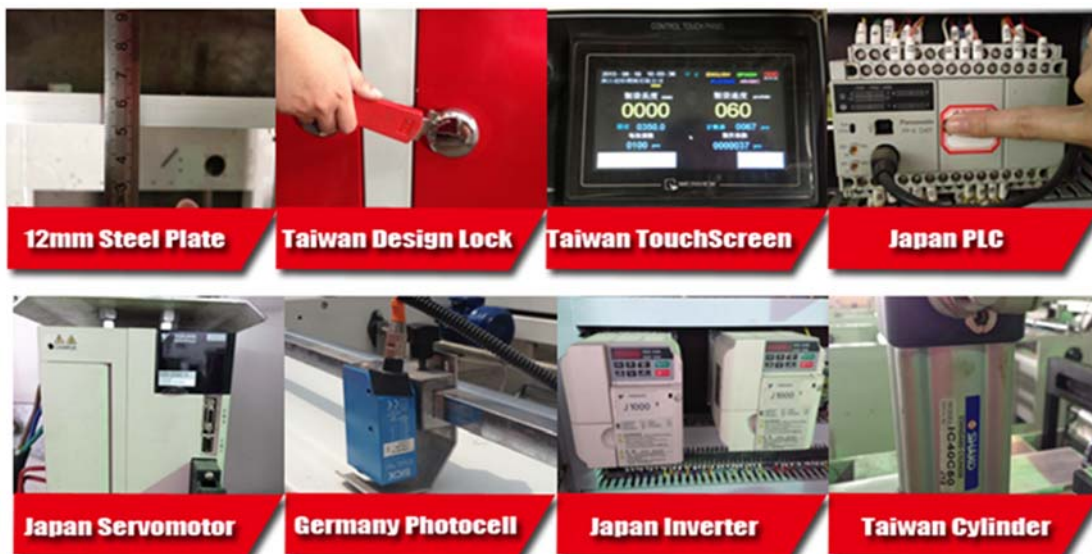

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Technical Specifications

Model	CWZD-400A
Type of bag produced	Three side sealing bag, center sealing bag, center sealing bag with gusset
Suitable material	plating ALU laminated film, paper-plastic laminated film, pure-ALU laminated film which takes BOPP, PET, CPP, ALU, and Nylon etc plastic laminated film as base material
Speed	Max. 150pcs/min
Machine speed	≤35 m/min (depending on the material)
Length of bag	Max. 380mm*6skip=2280mm
Width of bag	70-380mm
Dimension of material roll	φ650*800mm (diameter * width)
The max width size of 3 sides sealing bag	380 mm/line
The max width size of Center sealing with side gusset	100-260mm (gusset 60mm*2)
Accuracy of orientation	≤± 0.5mm
Number of thermal-sealing knife	Vertical sealing adopts 3groups for heating fluctuation, cooling fluctuation from up and down. Bottom sealing adopts 3 groups heating fluctuation, 1 group for cooling fluctuation.
The quantity of temperature heating	11 group
The bound of temperature	0-300 °C
Total power	24kw
Machine weight	3500kg
Overall dimension (L x W x H)	8000x1750x1800mm

Machine Configuration

- **Unwinding device**

1. Configuration: horizontal level-position (be made of magnetic powder arrester, Pneumatic Components, Pendulum Roll, transducer, motor, traction roller, sensor, and controlled system)
2. Unwinding shaft: plug type and pneumatic locking device.

- **Unwinding tension**

1. Control theory: The complex constant speed tension system which is made of computer control, magnetic powder brakes, inverter and AC motor, sensor
2. Adjustable driving: adjust through PID, drive through PWM
3. Detection method: Automatic tension monitor

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

- **Error correct device (EPC)**

1. Structure: screw adjustable by K type rack uprightness movements.
2. Driving: Solid states relay driving, low speed in-phase motor.
3. Transmission: Coupling connection.
4. Type of control: centralizing controlled by double photoelectricity sensor computer.
5. Detection method: Coaxial reflective photoelectric sensor.
6. Tracking precision: $\leq 0.5\text{mm}$
7. Round for adjust: 120mm
8. Round of photocell searching: $\pm 5\text{-}50\text{mm}$ adjustable, interval of limit switch, alarm automatically when the photocell exceed the bound,clewing of wrong error-correct.

- **Opposite side**

1. Structure: the center of adhesive roller two-direction rotary restructuring.
2. Forms: manual adjustment (adjusted handwheel).

- **Up and down pictorial**

1. Structure: single roller, adjustment up to down.
2. Forms: manual adjustment.

- **Vertical sealing device**

1. Structure: assembled-steel bridge structure.
2. Driver: main motor-driven linkage
3. Transmission: coaxial eccentric organizations-vertical movement.
4. Number: Group 3.
5. Length: 800mm.

- **Bottom sealing device**

1. Structure: wood-beam hot pressure structure.
2. Driver: main motor-driven linkage.
3. Transmission: coaxial eccentric organizations - vertical movement.
4. Quantity: bottom sealing Group 3, cooling Group 1.
5. Length:440mm.

- **Films traction**

1. Structure: pneumatic roller-floating structure Tension.
2. Driver: Inertia Digital Servo System (Japan import, 2000T / M, Panasonic servo motor)
3. Transmission: M880-round belt drive pulley, ratio: 1:2:4.
4. Control forms: central control computer.
5. Detection approach: photoelectric sensor with integrated control Proximity Switch

- **Middle Tension**

1. Structure: pneumatic floating Tension roll structure.
2. Form of control: central control computer.
3. Detection approach: no-touch point close switch.
4. Floating roll tension adjustment bound: 0 - 0.6 MPa pressure, the middle of the guiding motor compensation bound: 1 - 10mm (computer settings, automatic compensation).

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

- **The main transmission device**

1. Structure: crank rocker push-pull three-link structure.
2. Driver: 2.2W inverter-driven, three-phase induction motor 2.2kw.
3. Transmission: main drive motor with 1:10 reducer.
4. Control forms: Centralized control of computer.
5. Exercise: main motor sports all vertical movement led frame.
6. Eccentric distance: 13mm.

- **Automatic positioning device**

1. Means:
 - A. Computer-controlled automatic precision mode precision: $\leq 0.5\text{mm}$
 - B. Reflective photoelectric sensor tracking accuracy of detection precision $\leq 0.5\text{mm}$
2. Photoelectric searching bound: 0 - 10mm (the computer can set the size bound ,automatically search)
3. The amendment to the scope of compensation: $\pm 1 - \pm 5\text{mm}$.
4. Positioning method: photoelectric encoder and servo motor feedback control computer

- **Temperature Control Device**

1. Detection methods: K-type thermocouple Detection.
2. Control: centralized control through the computer, solid state relay driver FID adjustment.
3. Temperature range settings-300 degrees.
4. Temperature measurement point: mid-block electric heating

- **Cutter**

1. Structure: up-cutter + adjustment device + fixup down-cutter.
2. Form: Slide Block pneumatic roller bearing shear-top cut.
3. Transmission: borrowing the eccentric shaft power.
4. Adjustment: horizontal movement, pulling the handle adjustable cutting angles

- **Close Edge Machine**

1. Structure: horizontal reciprocating screw rewinding structure.
2. Driver: DC motor drives.
3. Control: displacement sensor.

- **Skip material feeding device**

1. Structure: asynchronous insulated pan-pneumatic.
2. Form of control: central control computer.
3. Driving: electronic drive solenoid switch (DC24V DC).
4. Action Means: 6 groups horizontal sealing asynchronous movement.
5. Times of the skip material feeding: from 2-6 times (it can be configured in the computer)

- **Automatic feeding device from conveyor belt**

1. Structure: 0-level position.
2. Driver: solid state relay driver, gear slowing single-phase motor.
3. Transmission; Bevel Gear.
4. Distance transmission and distribution volume: computer set free.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

5. Control of forms: central control computer.

- **Auxiliary facilities (provided by buyer)**

1. Power: three phase 380V 50Hz, air Switches 150A, Ground (R.S.Y.E).
2. Capacity: $\geq 55\text{KW}$.
3. Compressed Air source: 35 liters / min (0.6Mpa).
4. Cooling water: 15 liters / min.

Component List

Components Name	Name of Component	Type	Quantity	Provider
Traction Parts	Traction motor(servo)	1.5 KW	1 pc	Yaskawa -Japan
		1 kw	1 pc	
	Pneumatic Components		several	Shako-Germany
Main transmission	reducer	1: 10	1 set	TCG- TW
	Inverter	2.2 KW	1 set	Yaskawa-JAPAN
Feeding device	Inverter	0.75KW	1 set	Delta-TW
Controlled device	PLC		1 set	Panasonic-Japan
	Touch screen	10.4 inch	1 set	Weinview-Taiwan
	Solid State Relay		13 pcs	Fotek,Taiwan
	Magnetic powder brakes	2.5 kg	1set	Ruian China
	EPC		1 set	China
	Photocell		3 pcs	Kontec-Taiwan
	Switch and button		All	IDEC-JAPAN

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA