


YT-C Series

Flexographic Printing Machine

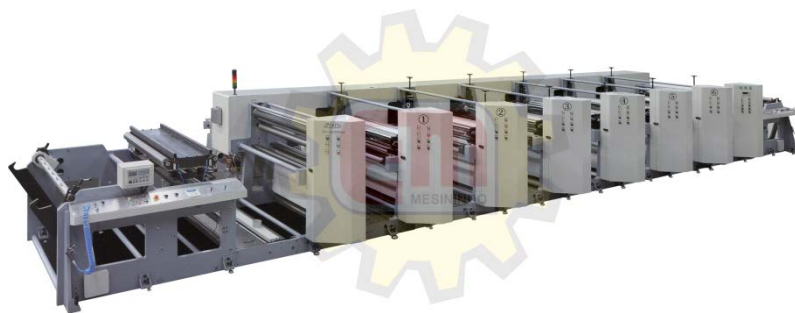

Carton Box Machinery

Flexo Machines

01 Description

This machine is a printing machine which adopts flexible photosensitive resin plates, rubber plates as the base material, anilox rollers for transferring ink, liquid ink for printing. It is controlled centrally by PLC system and generally consists of unwinding section, infeed section, printing section, drying section, outfeed section, rewinding section and control section. This machine is an ideal machine for printing paper cup, carton, paper bag, paper package, and so on.

02 Features

- 01 Separate single-station unwinding rollstand with hydraulic lifting device; 3"convex-type inflatable shaft for loading material (or shaftless loading); Automatically constant tension controller for unwinding tension control and EPC web guide control system for material alignment; alarm function for reminding replacing material, stopping-machine device for detecting material broken and dust collection device.
- 02 The machine is mainly controlled by inverter-fed motor with synchronization belt.
- 03 Double rubber nipper roller is used for paper feeding, whose pressure can be adjusted by pneumatic cylinder; taper tension control system ensures the color registration accuracy.
- 04 Ceramic anilox roller for ink transferring; single-blade reverse ink-scraping system; pneumatic clutch pressure for anilox rollers and plate rollers; color Registration: Y axis (automatic), X axis (manually).
- 05 Automatic Preventing Clogging Function: when the machine stops, the anilox roller will rotate to prevent the ink on its surface from drying and blocking holes (meshes) on it.
- 06 Double rubber nipper roller is used for paper feeding, whose pressure can be adjusted by pneumatic cylinder; static picture color detection system (Kesai) is adopted in this section.
- 07 Separate single-station rewinding rollstand with hydraulic lifting device; 3"convex-type inflatable shaft for loading material (or shaftless loading); stopping-machine device for detecting material broken.
- 08 Separate drying system (electric heating); I.R. short-wave heating and drying system (the temperature is adjustable); hot air and natural air drying system including exhaust fan and blower; hot air recycling system, with adjustable device for in/outfeeding air; central Exhaust System: waste gas will be exhausted centrally by exhaust fan.
- 09 The whole machine is centrally controlled by PLC system, which has self-diagnosis function and monitors the machine status; the running speed can be adjusted at multiple points.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012

YT-C Series

Flexographic Printing Machine

03 Technical Specification

Model	YT-41000C	YT-41300C	YT-41500C	YT-61000C	YT-61300C	YT-61500C
Max. paper width	1020 mm	1320 mm	1520 mm	1020 mm	1320 mm	1520 mm
Max. printing width	1000 mm	1300 mm	1500 mm	1000 mm	1300 mm	1500 mm
Printing Repeat Range	360-1200 mm	360-1200 mm	360-1200 mm	360-1200 mm	360-1200 mm	360-1200 mm
Paper thickness	80-230 gsm	80-230 gsm	80-230 gsm	80-230 gsm	80-230 gsm	80-230 gsm
Max. printing speed	150 m/min	150 m/min	150 m/min	150 m/min	150 m/min	150 m/min
Power	125 kw	135 kw	130 kw	150 kw	181 kw	198 kw
Total Weight	12000 kg	13500 kg	15000 kg	12000 kg	18000 kg	19500 kg
Overall Dimensions	12850x3000 x1700 mm	11550x3300 x1700 mm	12850x3500 x1700 mm	15550x3000 x1700 mm	15550x3300 x1700 mm	15550x3500 x1700 mm



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012