



Machine Introduction

Features:

1. Complete design, accurate installation, high stability, high security, low noise
2. Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability
3. High precision intermittent mechanism, high cutting precision, running steadily
4. Adopt European technology feeder, suction adjustable, steadily
5. Non-stop feeding, pre-stacking and delivery device can shorten the auxiliary time, improve the efficiency
6. Automatic pressure adjust system, pressure digital display
7. Human-friendly designed die frame and baseplate, makes installation, adjustment convenient
8. Pneumatic die locking device, die frame fixed more steadily, accurately, time saving
9. Front lay, side lay, feeding device fine tuning device, paper positioning more accurate
10. Double, crooked, empty optoelectronic position control, ensure the paper in the right position, reduce waste
11. Electronic control module design, adopt imported electronic components, ensure the accuracy and reliability
12. Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, trouble shooting more convenient
13. Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability
14. Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to let better durability

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Technical Specifications

Model	AEM-800
Max. paper size	820x620mm
Min. paper size	340x280mm
Max. cutting size	770x600mm
Die frame inner size	820x628mm
Cutting plate size	826x628mm
Min gripper edge size	7mm
Cutting precision	≤± 0.1mm
Max. cutting pressure	200T
Max. cutting speed	7000S/H
Pre-stacking height	1150mm
Delivery stack height	1000mm
Application	Cardboard: 0.1~2mm Corrugated paper: <4mm
Main motor power	7.5kw
Total power	12.75kw
Dimension [L(+pre-stacking)xW(+platform)xH]	4350(+1360)x2000(+1300)x1690mm
Weight	8.5T

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Standard Configuration


Feeding Section:

- European technic precise feeder, fit both paperboard and corrugated paper. 4 suction 4 send, can adjust angle and height of suction nozzle according to the paper distortion
- Double side lay (pull and push)
- Feeding device fine tuning, non-stop adjust
- Electronic double detector
- Main, secondary feeding device no-stop switch
- Wear-resisting PU pressing wheel
- Dual purpose loader
- Feeding time fine tuning device
- Additional carriage rod 1 set, carriage plate 2 set

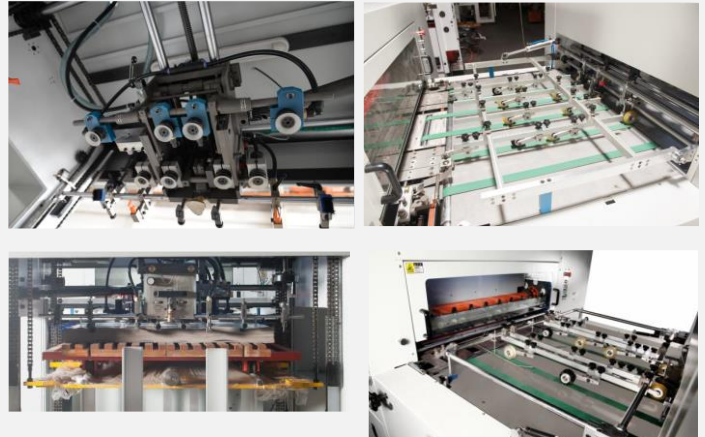

Host Machine Section:

- Pressure bearing part is made of high ductile iron QT500, high strength, never deform
- Alloy crankshaft with special process treatment
- Wear resisting worm, worm gear
- Convenient die flipping device
- Cycling lubrication oil supply system with high pressure oil pump from Taiwan
- High precision interval device
- Pneumatic brake clutch device from Italy
- Japanese SMC rotary joint
- Import gripper bar chain
- Pneumatic die locking device
- High hardness, strength Ti-Al alloy gripper
- Precise pressure adjust device
- PLC and man-machine interface from Taiwan

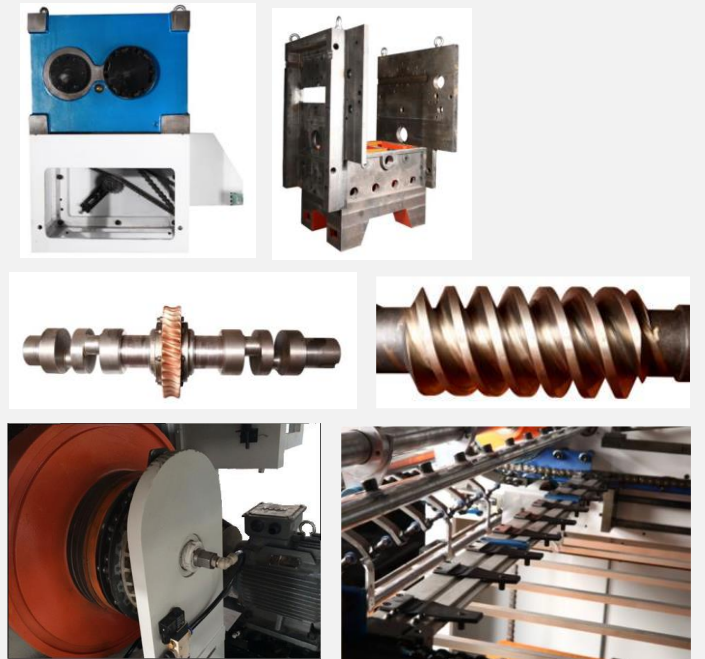

Delivery Section:

- Automatic arrange device, 2 blowing devices ensure all the paper could be well collected whether thin or thick
- Delivery section with control panel, more human-friendly
- Optoelectronic sensor ensure better delivery
- Automatic delivery board control system
- Manual delivery device
- Main chain protection device
- Rolling back preventing device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Main Configuration List

No	Name	Brand	Origin	No	Name	Brand	Origin
1	Main structure	QT500-7 ductile iron	China	15	Linear guide rail	HIWIN	Taiwan
2	Cutting plate	75Cr1 alloy steel	Germany	16	Fastener	GEMYEAR	Taiwan
3	Worm, Worm gear	Xingtang	China	17	Invertor	Panasonic	Japan
4	Crankshaft material	Ni-Cr-Mo alloy	China	18	HMI	TAISEE	Taiwan
5	Gripper bar	Aluminum alloy	China	19	Sensor	Panasonic	Japan
6	Gripper	Imported manganese steel	China	20	PLC controller	FATEK	Taiwan
7	Cam box	Handex	Taiwan	21	Encoder	Kubler	Germany
8	Main transmission chain	TYC	Taiwan	22	Proximity switch	FOTEX	Taiwan
9	Rotary joint	SMC	Japan	23	Relay	SCHNEIDER	France
10	Pneumatic solenoid valve	AIRTAC	Taiwan	24	Optoelectronic switch	Panasonic	Japan
11	Main motor	TECO	Taiwan	25	Button	SCHNEIDER	France
12	Feeding pile motor	CPG	Taiwan	26	AC Contractor	SCHNEIDER	France
13	Delivery pile motor	CPG	Taiwan	27	Circuit breaker	SCHNEIDER	France
14	Bearing	NSK	Japan	28	Vacuum pump	Tongyou	China

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA