

HQJ-1400D (A4) Model

PLC High Precision Crosscutting Machine



Machine Introduction

The machine with 2rolls with belt auto stacker: Automatic neaten and stack device, cutting part.

Usage: This machine is specialist for horizontal and vertical cutting paper rolling materials to A4, A3, A2 size etc. it can be with 1 roll, or 2rolls, or 4 rolls etc.



2 rolls unwinding part



Blowing waste device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

HQJ-1400D (A4) Model

PLC High Precision Crosscutting Machine

Features:

1. Adopts pneumatic automatic materials loading system with much easy operation and convenience
2. Adopts down-up recurrent cutting with orderly finished products and without water caltrop; meantime, it can be used for horizontal cutting and vertical cutting at one time
3. It adopts servo motor for controlling constant-length cutting.
4. It adopts PLC control, contact screen operation
5. It adopts pneumatic, displacement sensor for controlling transmission system, with photoelectric, gas together, it has the function of easy operation, high precision, good stability, low noise.
6. This machine has the function of the frequency converter timing device, automatic counting, stop working by alarm, magnetic powder tension control, can be vertically, adopt blower fan to get rid of waste
7. It has the functions of high-precision of cutting, high speed, etc. pneumatic structure combined with computer control be adopted for transmission section, making it become much more steady operation
8. It has the function of automatic stacking which is in order. Photoelectric auto tracing subtense system

Main Specification for HQJ-1400A4 WITH 4ROLLS :

1. Unwinding unit

- Machine shelf adopts cast quality steel plate
- Adopts air pressure automatic lifting function
- Lifting adopts 150 model double cylinder start
- Magnetic powder tension control system
- Control type: Use potentiometer control
- Tension control scope : 3-50kg
- Tension magnetic powder use 10kg controller
- Material pulling rolls adopts air shaft type
- Transmission guide roll: aluminum guide roll by active balance treatment
- Material can be adjustable right and left
- Control type : Pneumatic control
- Error correction motor adopts 130 model sychronization motor drive
- Photo electric for error-correction (precision+-0.2mm) Sensor made in Taiwan

2. Main machine part

- Shaft :Trough steel and high quality steel plate structure in 10mm thickness
- Trough beam style steel: 40×80×1600mm

3. Traction device:

- Structure style:active traction and passive press fasten style
- Based seat is casting structure
- Traction roller is rubber roller
- Press fasten style: controlled by pneumatic
- Press fasten cylinder
- Transmission guide roller: aluminum guide roller
- Traction motor adopts servo motor, Drive in-phase fix the length
- Length can be adjustable by PLC

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

4. Material delivery structure:

- Adopt motor and shift gears combination ways
- Main motor: speed adjusted by transducer
- Transducer: VT Brand
- Drive style: drove by main motor and traction through active roller
- Transmission: adopts triangle belt and belt wheel together structure
- Material-delivery: adopts floating backrest structure for buffer action to keep material
- Floating upper and lower tension adopts pneumatic traction Cylinder
- Floating guide roller: adopts aluminum guide roller
- Whole material-delivery structure will be controlled by displacement sensor

5. Cutting Unit

- Cutting style: fix well the lower cutter and cut actively by upper cutter
- Cutter holder: adopts casting heavy style structure
- Slip bearing
- Fount
- Lubricating oil can be recycled using
- Both upper and lower cutters adopts bar style imported balance silic steel cutter
- Cutting blade
- Cutter position can be adjustable by hand
- Active transmission style: main motor transmission equipped with derailleur enable centrifugal wheel joined with connecting pole to run cutter reciprocating
- Main motor: by transducer speed adjusting
- Transducer: Edison brand
- Transmission: adopts gear wheel and chain wheel together structure
- Centrifugal wheel
- Connecting pole

6. Slitting Unit

- Slitting way: Bottom blade initiative, drive upper balder to slit.
- Adopts round cutters
- Upper cutter shaft adopts steel shaft
- Upper round cutters is made form shanghai Shenlong group
- Bottom cutter shaft adopts steel shaft
- Bottom round cutter adopts shanghai shenlong cutter
- Slitting precision : $\pm 0.2\text{mm}$

7. Electrical control part : (connect with main machine)

- Control system: Main machine control, tension control, adjusting control
- Main machine control: Main motor control, traction control, material delivery control, cutting control (touch screen is PANASONIC PLC control)
- Tension control: Unwind tension, the speed of control scope is wide and good performance
- Electrical meter counting, alarm stop, auto length-position functions Above electrical components is Delixi brand in China.
- All the switches are made in "schneider" Germany

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

HQJ-1400D (A4) Model


PLC High Precision Crosscutting Machine

8. Delivery device:

- Automatic meter counting and stop
- Automatic delivery when reach the numbers setup in PLC
- Delivery table with belt

9. Other condition:

- Power supply: Three phases four lines air switch, 380V / 50Hz (can be made according to users)
- Air source : Max 5.5kg/cm²×5m³/min

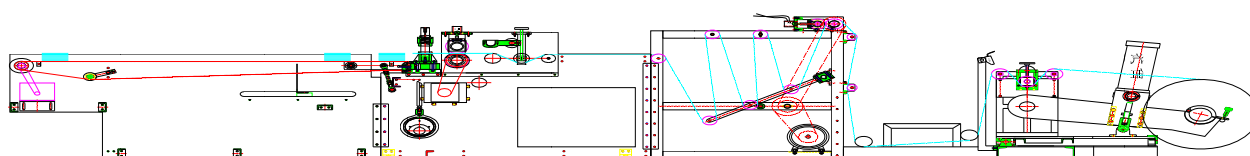

Technical Specifications

Model	HQJ-1100D	HQJ-1400D
Max unwinding diameter	φ1100mm	φ1400mm
Reference weight of cutting paper	40~500g	40~500g
Max cut width	1150mm	1650mm
Cutting length	20-500mm	20-500mm
Cutting speed	10-150times/min	10-150times/min
Cutting precision	±0.2mm	±0.2mm
Voltage:	AC380V/220V x 50HZ	AC380V/220V x 50HZ
Total power	13KW	15KW
Main function	1) can be 1 roll,2roll,4 rolls loading	
	2) With paper stacker	
	3) With round cutter for slitting	
	4) With belt transferring	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

HQJ-1400D (A4) Model

PLC High Precision Crosscutting Machine

Parts

Specification	Num	Remark
Spare parts		
Round cutter	6 sets	
Round blade	10 pcs	
Cross cutter	2 pcs	
Mechanical Shaft	2	
Electrical parts		
Swift	2 unit	
Electrograph	3 unit	
Minute watch	1 unit	
Switch	2 unit	
Hall switch	1 unit	
Error correction plate	2 unit	
Tension plate	2 unit	
Precision Electrograph	1 unit	
Air parts		
Air joint	1 unit	
Hand rotate valve	1 unit	
Adjust valve	1 unit	
Air cylinder	4 unit	
Air pressure watch	4 unit	
Air cup	2 unit	
Air gun	4 unit	
Air neb	5 unit	
Tool box		
Monkey wrench	1 unit	
10-12 hatch wrench	1 unit	
Oil gun	1 unit	
Inner hexagonal wrench	1 unit	
Shape screw driver	1 unit	
Shape screw driver	1 unit	
Double head wrench	1 unit	12×14
Double head wrench	1 unit	14×17
Double head wrench	1 unit	22×24
Cushion of machine	10 unit	
Operation manual	1	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA