



Machine Introduction

Features:

1. Complete design, accurate installation, high stability, high security, low noise
2. Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability
3. High precision intermittent mechanism, high cutting precision, running steadily
4. Adopt European feeder technology, suction adjustable, steadily, precise, good paper applicability
5. Non-stop feeding, pre-stacking and collection device can shorten the auxiliary time, improve the efficiency
6. Human friendly design stripping frame makes installation and adjustment of stripping dies more convenient
7. Pneumatic die locking device, die frame fixed more steadily, accurately, time saving
8. Front lay, side lay, feeding device fine tuning device, paper positioning more accurate
9. Double sheet, crooked sheet, empty sheet optoelectronic detect device, ensures paper in the right position, reduce waste
10. Electronic control module design, adopt imported electronic components, ensure the accuracy and reliability
11. Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, troubleshooting more convenience
12. Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability
13. Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to get better durability

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**36 YEARS
SERVING
INDONESIA**

Technical Specifications

Model	AEM-1650SQ
Max. Paper Size	1670x1210mm
Min. Paper Size	520x460mm
Max. Cutting Size	1650x1200mm
Die frame inner size	1660x1215mm
Cutting plate size	1680x1186mm
Min. gripper needle size	7mm
Cutting precision	$\leq \pm 0.25\text{mm}$
Max. cutting pressure	300T
Max. cutting speed	4800 S/H
Pre-stacking height	1500mm
Collection stack height	1300mm
Application	White board 0.3~2mm, Corrugated paper <9mm
Main motor power	15KW
Total power	22KW
Dimension [L(+pre-stacking)xW(+platform)xH]	8400(+2300)x3000(+2300)x2550mm
Weight	24T

Configurations

No.	Name	Brand	Place of Origin
1	Shell, main structure	QT500-7 ductile iron	China
2	Die cutting plate	75 Cr1 alloy steel	China
3	Worm, worm gear	Xingtang	China
4	Crankshaft material	Ni-Cr-Mo alloy	China
5	Gripper bar	Aluminum alloy	Taiwan
6	Gripper	Imported manganese steel	Taiwan
7	Cam box	Handex	Taiwan
8	Main transmission chain	TYC	Taiwan
9	Rotary joint	SMC	Japan
10	Pneumatic solenoid valve	AIRTAC	Taiwan
11	Main Motor	TECO	Taiwan
12	Feeding pile motor	Dunglee	Taiwan
13	Delivery pile motor	Dunglee	Taiwan

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657


36 YEARS
SERVING
INDONESIA

14	Vacuum pump	Tongyou	China
15	Bearing	NSK	Japan
16	Linear guide rail	Hiwin	Taiwan
17	Fastener	Gemyear	Taiwan
18	Inventor	Frecon	Taiwan
19	HMI	Taisee	Taiwan
20	Sensor	Panasonic	Japan
21	PLC controller	Fatek	Taiwan
22	Encoder	Kubler	Japan
23	Proximity switch	Fotek	Taiwan
24	Relay	SCHNEIDER	France
25	Optoelectronic switch	Panasonic	Japan
26	Button	SCHNEIDER	France
27	AC contactor	SCHNEIDER	France
28	Circuit breaker	SCHNEIDER	France

Machine Features

1. Feeding Section

- * European technic precise feeder fit both paperboard and corrugated paper. 4 suction 4 send, can adjust angle and height of suction nozzle according to the paper distortion
- * Double side lay (pull and push)
- * Feeding device fine tuning, non-stop adjust
- * Electronic double detector
- * Main, secondary feeding device no-stop switch
- * Wear-resisting PU pressing wheel
- * Dual purpose loader
- * Feeding time fine tuning device
- * Additional carriage rod 1 set, carriage plate 2 set

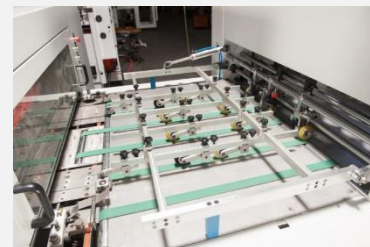

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**36 YEARS
SERVING
INDONESIA**

2. Host Machine Section

- * Pressure-bearing part is made of high ductile iron QT500, high strength, never deform
- * Alloy crankshaft with special process treatment
- * Wear resisting worm, worm gear
- * Convenient die flipping device
- * Cycling lubrication oil supply system with high pressure oil pump from Taiwan
- * High precision interval device
- * Pneumatic brake clutch device from Italy
- * Japanese SMC rotary joint
- * Import gripper bar chain
- * Pneumatic die locking device
- * High hardness, strength Ti-Al Alloy gripper
- * Precise pressure adjust device
- * PLC and man-machine interface from Taiwan

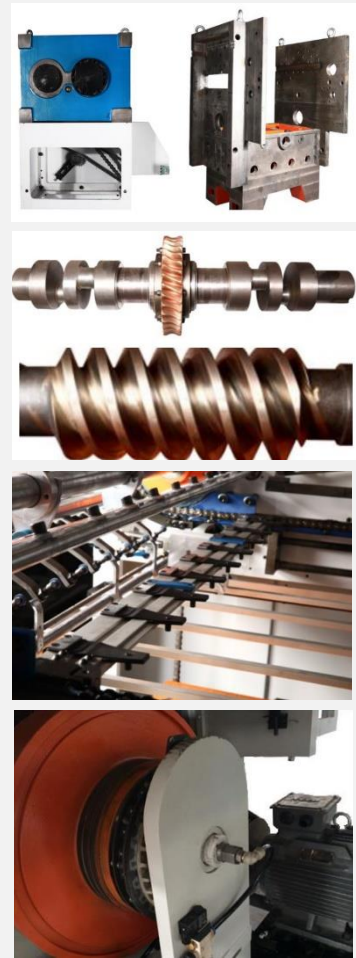

3. Waste Stripping Unit

- * High strength Ti-Al alloy waste stripping frame
- * Light waste stripping needle



4. Delivery Section

- * Automatic arrange device, 2 blowing devices ensure all the paper could be well collected whether thin or thick
- * Delivery section with control panel, more human-friendly
- * Optoelectronic sensor ensures better delivery
- * Automatic delivery board control system
- * Manual delivery device
- * Main chain protection device
- * Rolling back preventing device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**36 YEARS
SERVING
INDONESIA**