


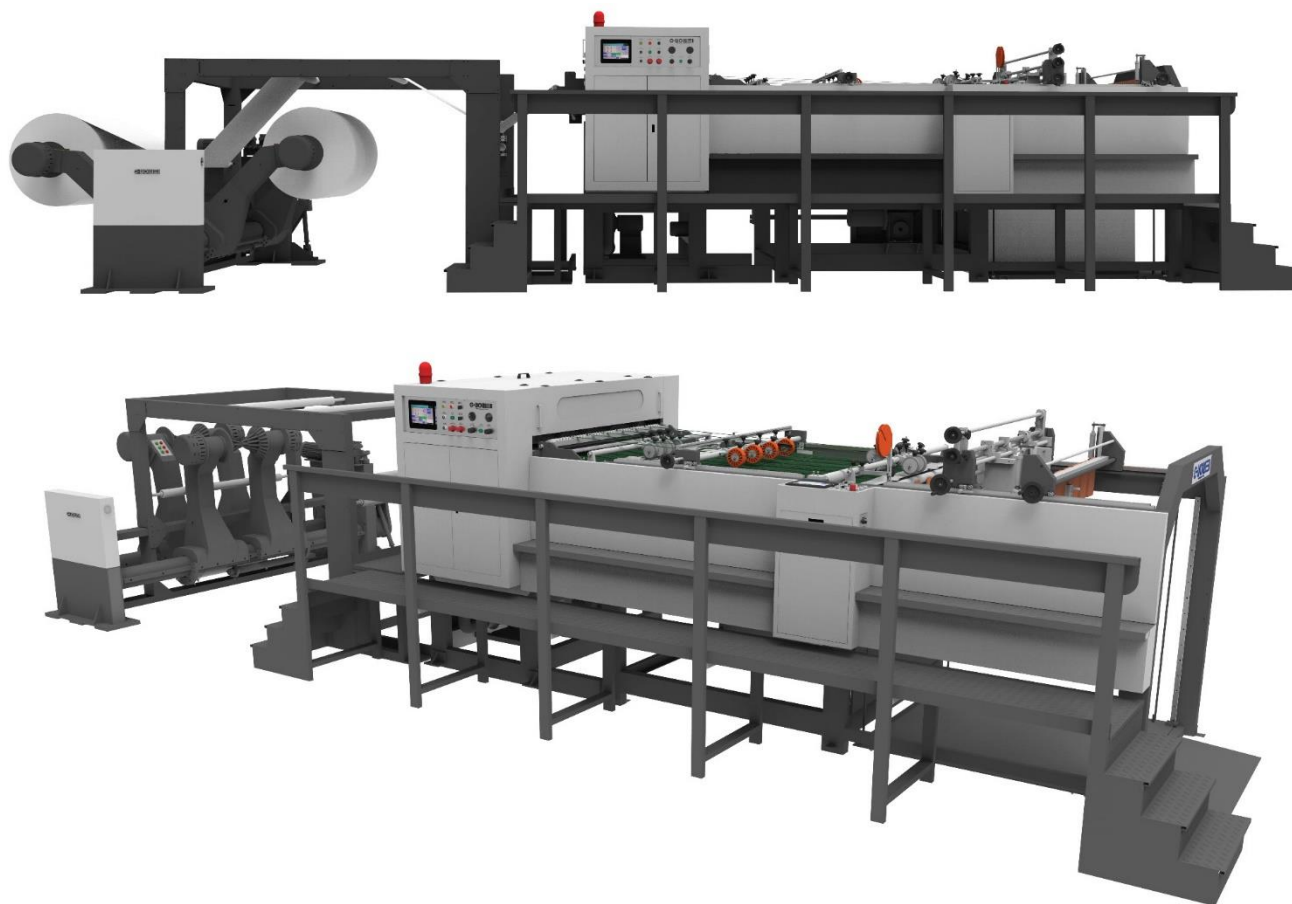

Machine Introduction

Servo Precision High Speed Sheet Cutter apply the advanced imported technique. The servo motor, AC transducer, the conveyor belt and pneumatic vibrator apply international brand; the electrical system adopts SCHNEIDER & OMRON to make the cutting speed fast and stable. Germany precise bearing and cutting knife assure the high cutting precision. The touching screen makes the operation easy. The anti-curve rack assures the paper flat. This machine is the paper processing machine which is very popular in the paper making and printing industry. It can improve the efficiency and benefit of your work.

Features:

1. Adopt Siemens control system and AC servo control device to make the cutting speed of the machine faster, more accurate and more stable
2. 10-inch human-machine screen double touch screen (with Internet of Things), and has a self-diagnostic function, making the operation simple and convenient;
3. With a large recurve structure, the cut paper is flatter and smoother
4. This machine is suitable for a wide range of applications, such as cardboard, coated paper, kraft paper, cultural paper, double-coated paper, gold and silver cardboard, tobacco and alcohol packaging paper, aluminum foil paper, laser paper, etc. The King of Paper has a wide range of applications, such as cardboard, coated paper, kraft paper, cultural paper, double-coated paper, gold and silver cardboard, tobacco and alcohol packaging paper etc.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657




Machine Part



Internet of Things: It can dynamically track, realize the synchronization between the management background computer or mobile phone and the machine screen, monitor the technical parameters such as the running speed of the machine and the number of paper sheets in real time, record information such as early warning and alarm, and realize remote program update and upgrade, as well as remote guidance. Machine maintenance.



The control center adopts Siemens PLC

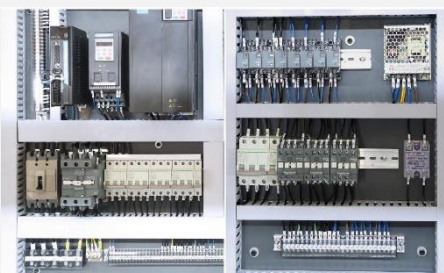


Adopt Imported Electric components such as Schneider, Panasonic, Inovance and Idec



Floating aluminum roller deviation correction device



Adopt high-precision screw device, equipped with tungsten steel blade. High precision, good stability.

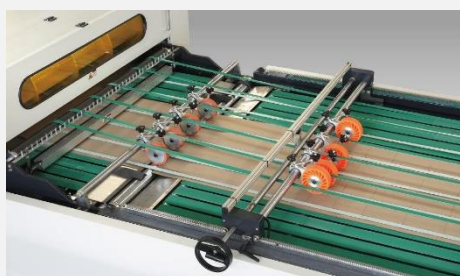




Adopt sun wheel paper delivery device and rubber roller to press paper.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

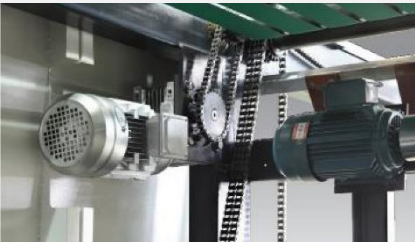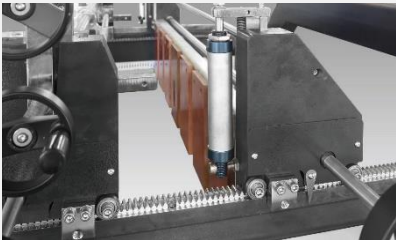


	The conveyor belt adopts Chinese, Japanese and other brands
	Equipped with the pneumatic automatic lifting function of the delivery baffle, which is convenient to operate and easy to enter and exit the paper stack.
	Double arm hydraulic shaftless discharge rack
	Guowei uses a large recurve device, which is different from the small recurve devices of other manufacturers. Adjust the paper warp caused by curling of the roll paper so that the paper is flat after cutting. Effectively improve production efficiency, increase production capacity and efficiency.
	Adjust the knife part: Using ball screw, more accurate, automatic diagonal device, to ensure paper accuracy, more convenient operation
	Left and right adjustment at the paper receiving table, use a ball screw; the paper receiving table lift is composed of chains and guide rails on both sides. The paper is more stable and the paper is neat and tidy.
	Equipped with label inserting device, and adjustable function of receiving paper vibration.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



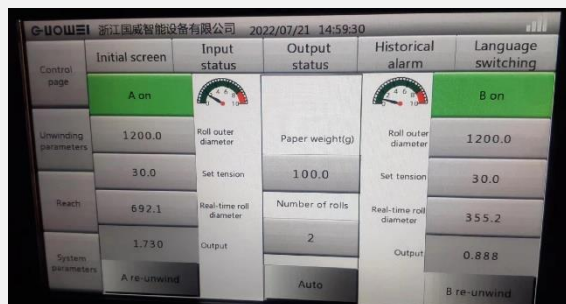

After entering the tension value for the first time, the computer can automatically recognize the size of the paper roll to automatically adjust the tension.



Oil-free silent air compressor



Paper feeding guide rail



Optional Configuration: The pneumatic slitting knife set adopts a one-piece design and closely cooperates with the dovetail slide rail.



Optional Configuration: Small deviation correction device to prevent paper from being cut diagonally

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	GW1400-2
Cutting type	Single rotary sheeter
Applicable range of paper	45-550g/m ²
Max. paper roll diameter	1800mm
Max. paper-cutting width	1400mm
Range of cutting length	450-1450mm
Cutting sheet number	2 sheet
Cutting precision	Cutting length ≤1000mm: ±0.5mm
Max. cutting speed	300 cut/min
Max. feeding speed	300 m/min
Max. paper stacking height	1500mm
Air pressure source requirement	0.8Mpa
Power	380V*50HZ
Gross weight	13800KGS
Full-load power	26kw
Dimensions	12000×3920×2300mm

GW1400-2 Motor Details

No	Product Name	Model	Specification	Qty	Brand
1	Servo motor	ISMG1-12D20CD-A331FA	12.6KW	1	INOVANCE
2	Motor	YS112A7P5L	7.5KW	1	SFC
3	Rear conveying gear motor	YE2-90S-4	1.1KW	1	China
4	Lifting gear motor	YEJ2-100L2-8	1.1KW	1	China
5	Knife adjustment servo motor	ISMH4-75B0CB-A331Z	0.75KW	1	INOVANCE
6	jogger motor	YE2-80M2-6	0.55KW	1	China
7	Recurve geared motor	Y2-71M1-4	0.25KW	1	China
8	Vibration motor	HY-0.4	0.4KW	1	China
9	Hydraulic station motor	KU70-3HP-6W	2.2KW	1	China
	Total power		26KW		

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



Configuration List


Name	Brand Model	Origin
Dual computer display screen (With IoT)	FLEXEN 10 inches color touch screen	Joint Venture
Ball lead screw	Ball-lead screw	China
Double rack	Sun wheel receiving paper positioning	China
Control center	PLC/ SIEMENS PLC	Germany
Servo drive	INOVANCE	China
Servo motor	INOVANCE	China
Overload protection switch	Schneider	France
Relays	Schneider	France
Contactor	Schneider	France
Air switch	Schneider	France
Start button	Schneider	France
Locating switch	Schneider	France
Hydraulic Pump		Taiwan
Hydraulic solenoid valve	Yishida	China
Pneumatic proportional valve	SMC	Japan
Reducer	Dasu	China
Proximity Switch	Panasonic	Japan
Bearing	FAG	Germany
Knife	Tungsten steel	German technology

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657




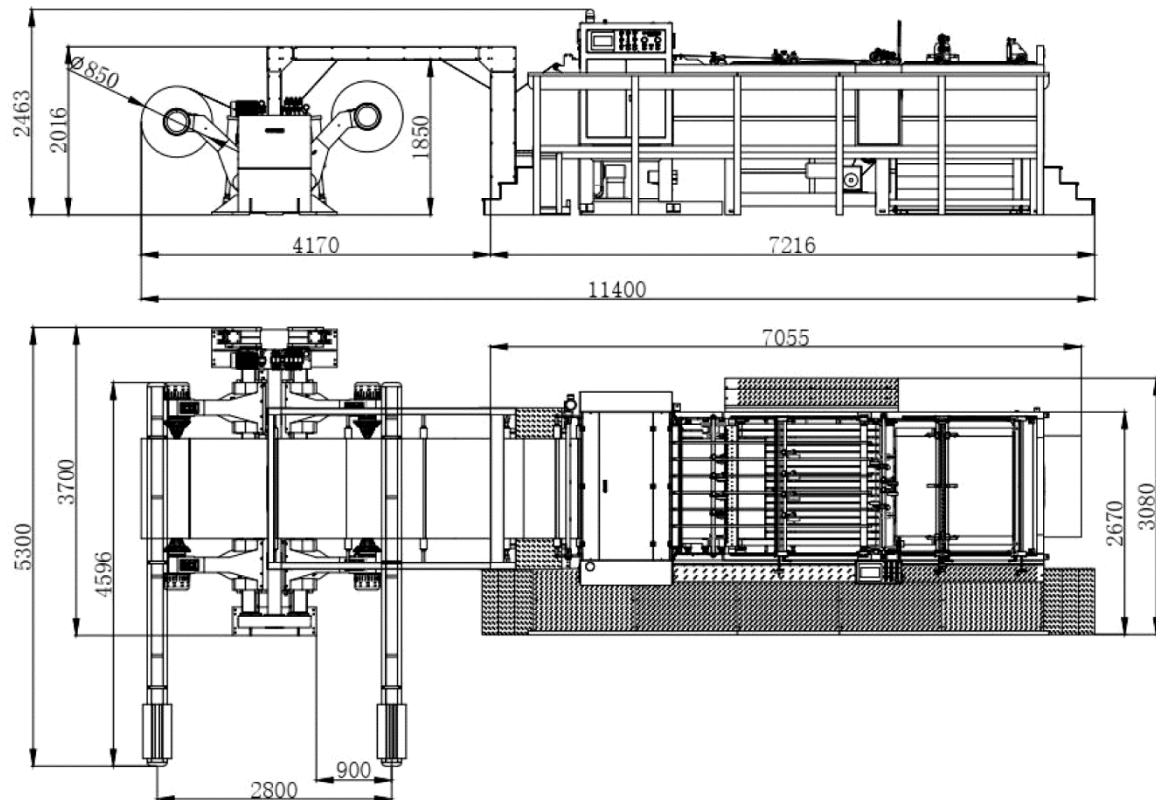

Installation drawing:

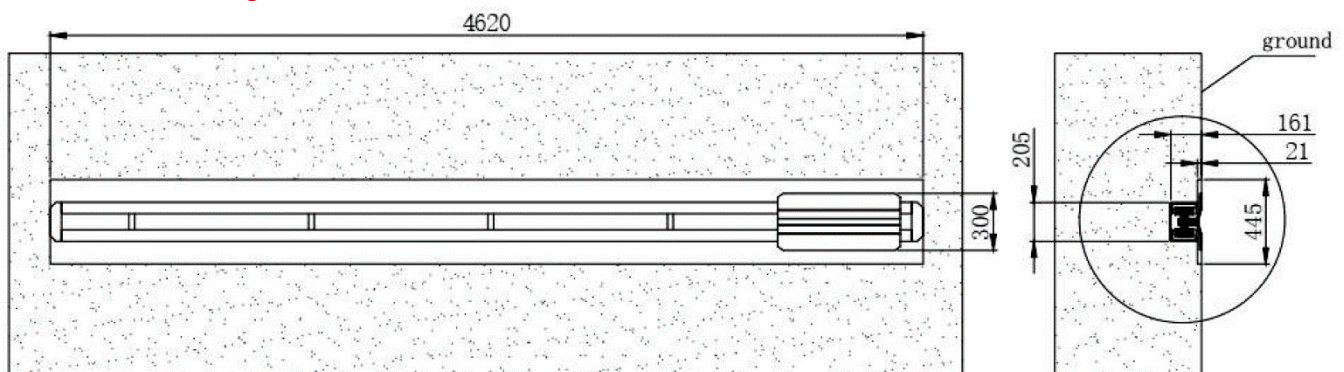

Enlarge View

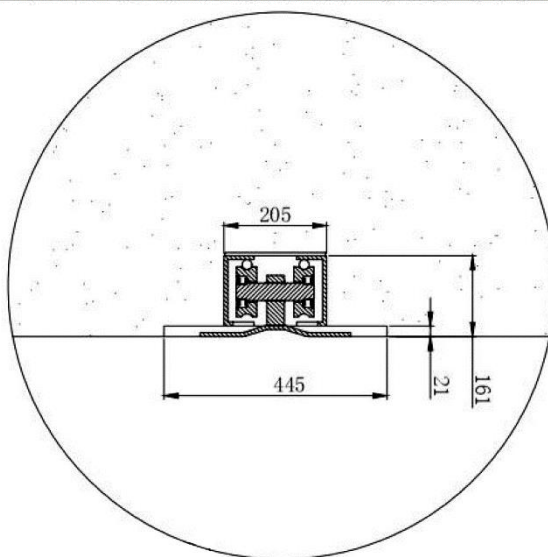

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO


Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



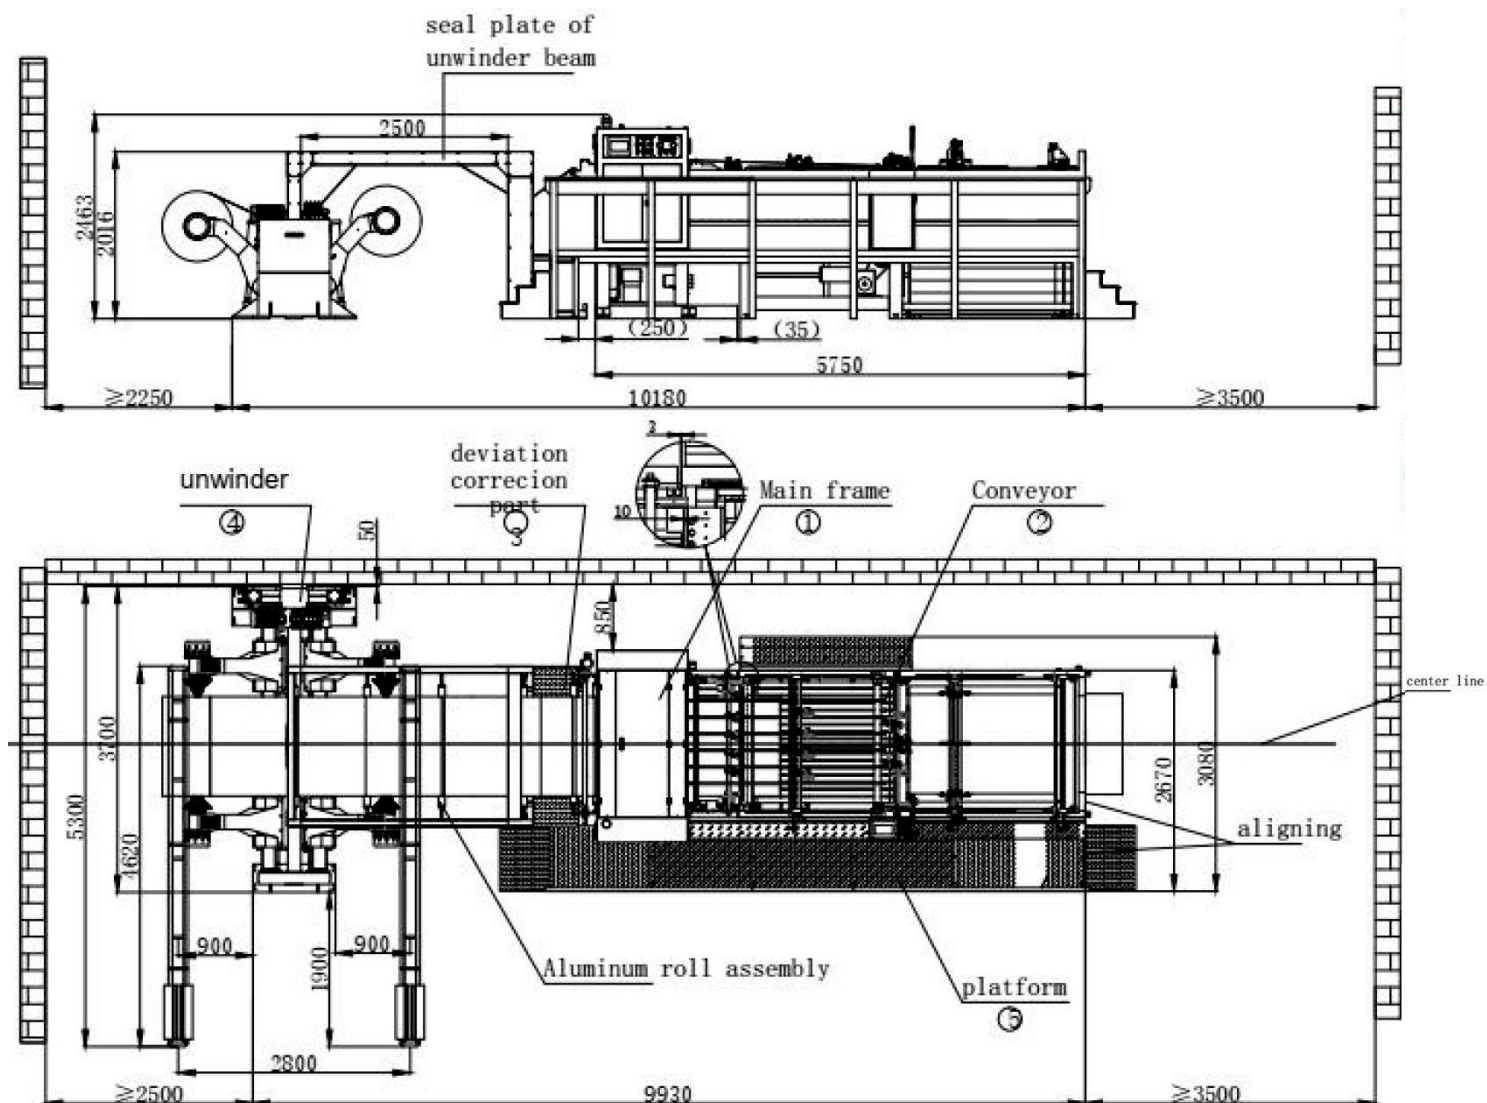

Installation instructions:

Step 1: Position the machine according to actual size

Step 2: Confirm the position of the center line as shown in the chart, place the part of the No.1 main frame, and adjust the level

Step 3: No 2 conveyor part: according to the dimension marked on the diagram, it is 35mm away from the main frame, taking the center line as the reference, it is symmetrical with the No.1 main frame, adjust the level, and the paper output height is 10-15mm lower than the No.1 main frame.

Step 4: No.3 deviation correction part: according to the size marked on the diagram, it is 250mm away from the main frame, taking the center line as the reference, it is symmetrical with the part of the No.1 main frame, adjust the level

Step 5: No.4 unwinder rack: The unwinder rack is 2500mm away from the deviation correcting rack, based on the center line, symmetrical with the No.1 main frame, adjust the level

Step 6: Install the unwinder beam, sealing plate and aluminum roller assembly


Step 7: Platform No.5: after assembly, place it according to the top view

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.





PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



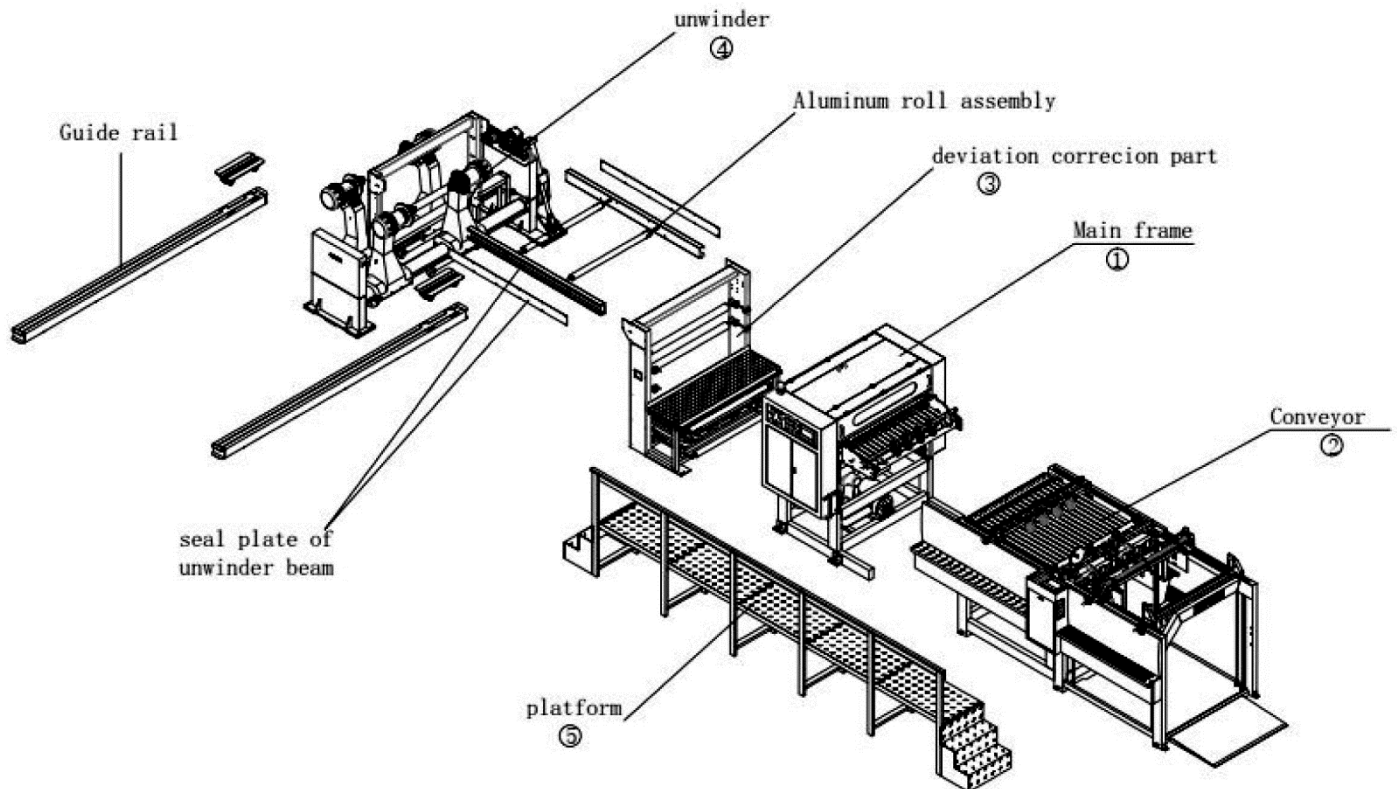

Container loading drawing:

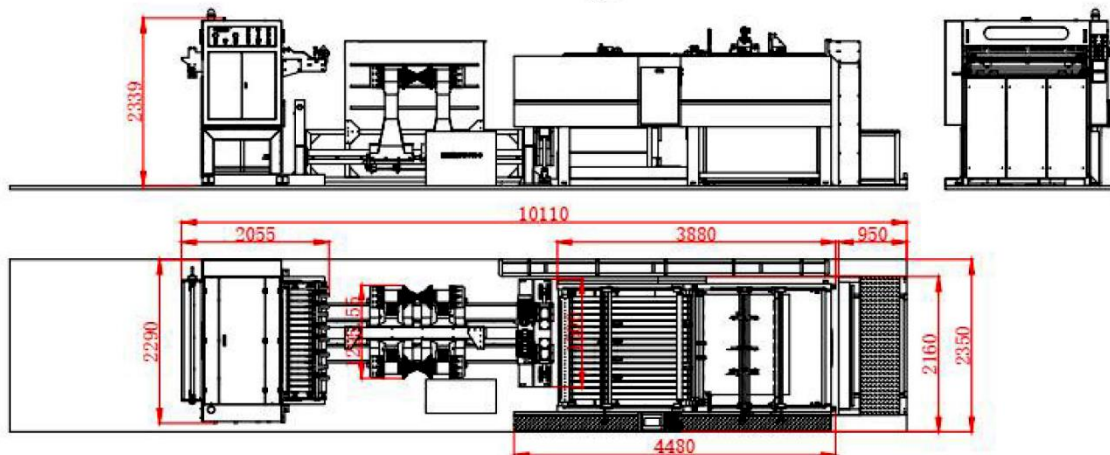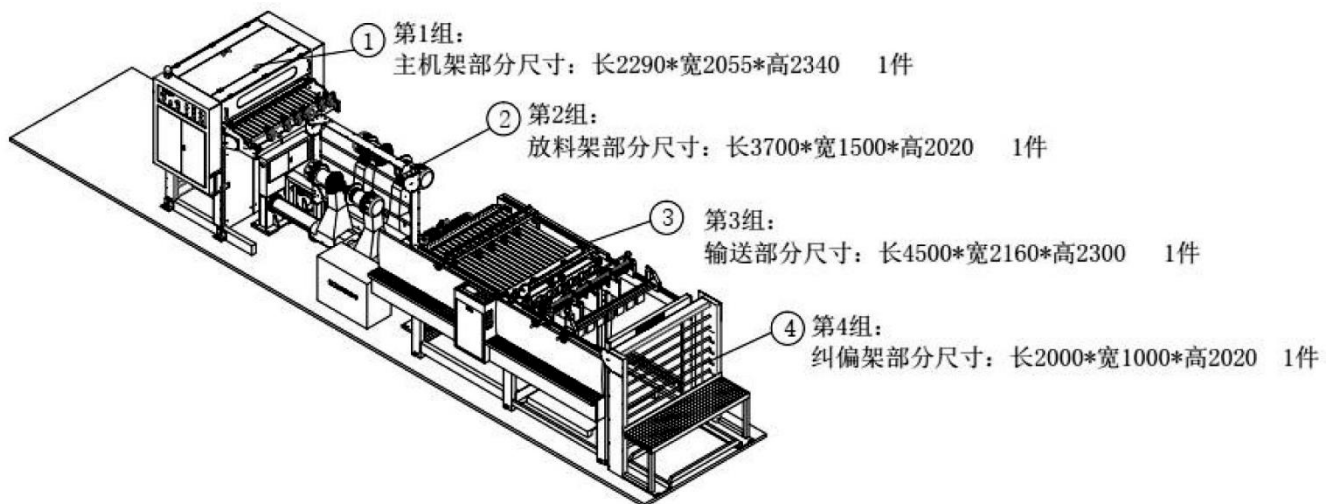


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Packing List

Picture	Name	Model	Unit	Qty	Remark
	Whole machine	GW1400/1700		1	
	Circlip pliers		Bundle	1	
	Needle nose pliers	6"/150mm	Bundle	1	
	Vise	8"/200mm	Bundle	1	
	Grease gun	JM-350A/200CC	Bundle	1	
	Baide gum	50ml	Branch	1	
	Cross, straight screw drive	4	Bundle	1	
	Adjustable wrench	15	Bundle	1	
	Socket wrench	Φ17	Bundle	1	
	Dual head wrench	8-10,12-14, 13-15, 17-19, 22-24	Bundle	1	
	Allen wrench	(1.5-10)	Set	1	
	Allen wrench	12, 14, 16	Bundle	1	
	Service manual		Book	1	
	APG reduced through	APG8-6	Pieces	2	Tracheal connector
	APU straight joint	APU8	Pieces	2	Tracheal connector
	APE T type tee	APE8	Pieces	2	Tracheal connector
	G01-01 Top plate	Φ55x10	Pieces		20single/double roll,28 four roll,36 six roll
	Expansion screw	M16x150	Branch		20single/double roll,28 four roll,36 six roll
	Expansion screw	M12x100	Branch	4	
	Recrank shaft support small rubber wheel	A10-A0-02	Pieces	12	White nylon
	Circlip for hole-A type	24	Pieces	12	
	Toolbox	16.5"	Pieces	1	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

