



Machine Introduction

The MHK series Automatic Hot Foil Stamping and Die cutting Machine with Stripping manufactured by Zhejiang Dayuan Machinery Co., Ltd., it can efficiently complete the die cutting and embossing of products, as well as maintaining the highest precision and product quality. The MHK series Automatic Hot Foil Stamping and Die cutting Machine with Stripping are well equipped and can almost adapt to all die cutting requirements of products.

Features:

1. Adopt nodular cast iron-QT500-7, the mainframe wallboard casting by special technology process, thus featuring by high strength, never deformation and ensure the safety of the mainframe wallboard.
2. Adopt Taiwan-imported intermittent mechanism to ensure that the machine operates accurately. Also, the main engine is equipped with overload protection device and torque limit clutch, to ensure that when they are being impacted by external force can stops immediately to reduce the damage to the machine body and teeth precision and reduce the occurrence of failure rate.
3. The whole machine all uses NSK imported original bearing.
4. The whole machine uses original parts imported from Germany Moeller, Japanese OMRON.
5. Key parts of gripper bars are imported from Japan.
6. Die cutting precision $\pm 0.1\text{mm}$, Max. working speed could reach 6000s/h.
7. The craft shaft is adopts Germany Ni-Cr-Mo metal steel, with high precision and will never deforms.
8. Use the centerline positioning system to realize fast plate changing of worksheet.
9. Equipped with Dayuan first-developed pressure automatic adjustment device, ensure fast and smooth when they adjust of die cutting pressure.
10. Equip with touch-screen operation interface in both Chinese and English.
11. All adopt Japanese SMC and Taiwan AIRTAC pneumatic components to ensure every pneumatic action performs accurately.
12. Equipped with double sheet detector.
13. Equipped with Non-stop automatic assisted paper collecting device

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

14. The side gauge adopts photoelectric system.
15. Automatic force lubrication system recycles fluid.
16. The oil pump adopts automatic cooling fan device.
17. Main motor from Germany Siemens, ensure stable operation.
18. Vacuum pump from Germany Becker, ensure paper feeding smoothly.

Technical Specifications

Model	MHK-820T
Max. sheet size	820*600(mm)
Min. sheet size	310*260(mm)
Ma*. die cutting size	800*580(mm)
Max. hot stamping size	800x600(mm)
Min. gripper margin	9-17mm
Inner chase size	910*610(mm)
Stock range	80~2000g/m ² (Card paper) ≤4mm (Thickness of corrugated paper)
Die cutting accuracy	≤±0.1mm
Max. working pressure	200ton
Max. working speed	6000s/h
Max. paper feeding stacking height	1500mm (including wooden pallet)
Max. paper collecting stacking height	1300mm (including wooden pallet)
Max. gold foil diameter	250mm (Longitudinal) 200mm (lateral)
Electric-heated system	20 temperature zone, 40-180°C adjustable
Foil width	20-780mm
Main motor power	11kw
Whole machine dimension	6700mm*3400mm*2200mm (length: including pre-feeding track) (width: including the pedal)
Total weight of machine	About14.5t
Full-load wattage	52kw

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

MHK-820T

Automatic Hot Stamping and Die Cutting Machine

Installation dimension of MHK-820T Automatic hot foil stamping and die cutting machine (Length 6658mm, width 4256mm, height 2279mm)

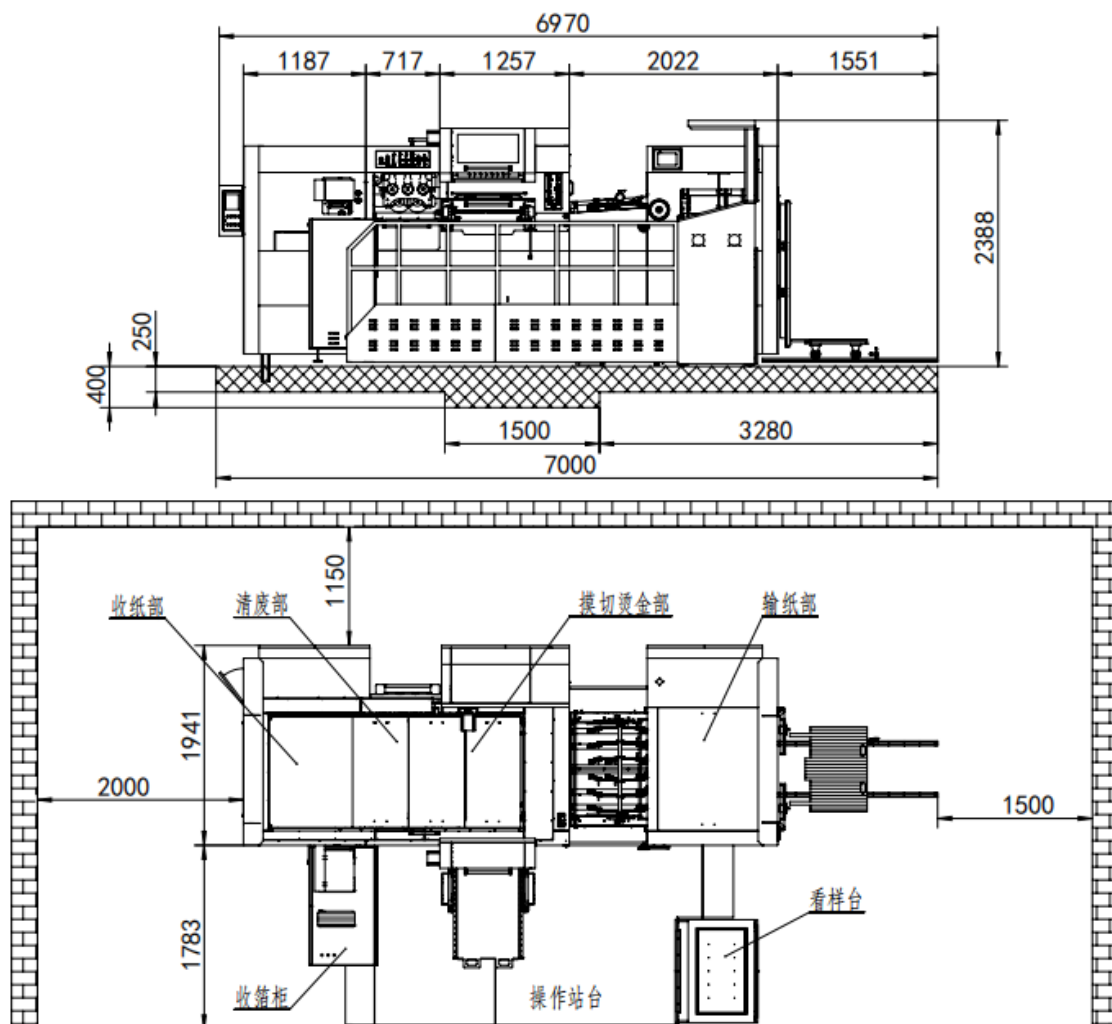

Configuration List

No.	Name	Brand	Place of Origin
1	Main motor	Siemens	Germany
2	Button	Eaton-Moeller	Germany
3	Circuit breaker	Eaton-Moeller	Germany
4	Motor protector	Eaton-Moeller	Germany
5	AC contactor	Eaton-Moeller	Germany
6	Air switch	Eaton-Moeller	Germany
7	Die pressing base plate	HIGH ALLOY PLATE	Germany

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

8	Crankshaft material	Ni-Cr-Mo METAL STEEL	Germany
9	Main drive chain	Iwis	Germany
10	Cable	TKD	Germany
11	Man-machine interface	SCHNEIDER	France
12	Inverter	SCHNEIDER	France
13	Control center	SCHNEIDER	France
14	Rotary joint	OMPI	Italy
15	Electromagnetic clutch	OMPI	Italy
16	synchronous belt	Gates	America
17	Tooth row, tooth slice	KUI	Japan
18	Photoelectric switch	Omron	Japan
19	Proximity switch	Omron	Japan
20	Encoder	Omron	Japan
21	Sensor	Omron	Japan
22	Optical fiber	Omron	Japan
23	Counting photoelectricity	Omron	Japan
24	Intermediate relay	Omron	Japan
25	Main solenoid valve	SMC	Japan
26	Air volume regulator	SMC	Japan
27	Chain	TYC	(China) Taiwan
28	Air cylinder	Airtac	Taiwan
29	Linear guide	Hiwin	Taiwan
30	Indexing drives	Handex	Taiwan
31	worm gears	WANCENG	Taiwan
32	Main feeder motor	Dongli	Taiwan
33	Lifting motor of paper-collecting platform	Dongli	Taiwan
34	Wallboard and machine body structure	QT500-7 nodular cast iron	Shanghai

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Technical Principle:



Feeder

- Precision feeder head that adopts European manufacturing technology, can be used for card paper, corrugated paper and grey board
- Four suction and four sent, the suction angle and height can be adjusted according to the deformation of paper
- Unique paper receiving mechanism, suitable for different deformed papers
- High-speed feeder head is specially manufactured for special aluminum alloy material, and all parts are imported
- Dual-feeder head anti-collision detection device
- Main and auxiliary paper feeding, can switch without stopping the machine
- A set of pre-feeding mechanism (optional)
- Fish scale type paper feeding, smooth and accurate
- Non-stop fine adjustment device of feeding platform
- Two-purpose paper feeding machine
- A set of auxiliary paper support device and two sets of paper supporting board



Paper conveying platform

- Electromechanical dual-sheet detector
- Adopt advanced control system to control the speed of conveying device, making paper feeding smoothly and reducing collision
- Conveying paper platform can be controlled separately, and vacuum conveying paper platform is optional
- Imported conveying paper belt
- Super wear-resistant polyurethane conveying paper wheel
- Adjustable rubber wheel and brush wheel, to ensure accurate positioning when they reached front gauge and side gauge.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA



Front/Side gauge

- Front gauge detection, to guarantee the arrival rate of paper
- Adopt left/right dual-push pull gauge way to meet different printing and alignment requirements
- Pressure-containing member adopts high-strength nodular cast iron-QT500 and special casting process, thus it has high strength and never deforms.
- The Ni-Cr-Mo metal steel crank shaft Through the special craft processing, imported from Germany.
- Super wear-resistant worm and gear imported from Taiwan
- Knife template turnover device that is convenient and fast
- Strong lubrication system
- Imported intermittent box with torque limit & limit cutting protector, to ensure the machine is smooth and safe operation.
- High-precision 240 degree intermittent mechanism
- Pneumatic locking device, safe and fast
- High-speed rotary joint
- Adopt advanced Germany Siemens motor, to increased the die cutting speed to 7500 sheets/hour
- Die cutting plate frame, adopting central positioning system and being equipped with micro-adjustment device
- 10.4 inch color screen, displaying the working state of machine all the time.
- Automatic lubrication system and is equipped with oil pressure gauge and alarm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA



Electrical components

- Man-machine interactive touch function, can set different long pull and short pull
- The alarm will be triggered when the foil is shorter than 6cm
- The computer deal with foil monitoring system, used to display remaining and have used foil length
- The whole set of original parts imported electrical components and PLC control system are from France Schneider, in order to improve the operation quality



Lateral foil feeding device (two set)



Longitudinal foil feeding device (three set)

Hot foil stamping section

- Comprehensive foil feeding system, can realized longitudinal and lateral hot foil stamping at the same time, reducing the foil usage and saving foil replace time
- Foil feeding devices are controlled by Schneider servo motor and Schneider PLC control system.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA



Lateral foil collecting device



Longitudinal foil collecting device <1>



Longitudinal foil collecting device <2>

- Two types of foil collecting, easy for operation. Longitudinal foil collecting device

<1> is designed to be placed right behind Longitudinal foil feeding device, ensure neat collecting of large format foil. Brush roller of Longitudinal foil collecting device

<2> is used to clear waste foil. The user-friendly foil bracket can be pulled out from the machine, facilitating replacing of foil. Maximum foil diameter is 250 mm (Longitudinal)



Paper delivery section

- Automatic paper aligning device and two blowers for paper collection can ensure neat collection of thin and thick papers
- Paper collection part with touch screen control, it is convenience for operation and has data display, and all operations can be performed through the touch screen
- Paper collection part is equipped with control panel to realize more personalized operation
- Paper collection photoelectric device, to ensure neat paper collection
- Automatic lift control system of paper collection platform
- Automatic assisted paper collection system
- main chain protection device
- Prevent the paper returning device
- Equipped with non-stop device
- The whole machine could be controlled by 10.4 inch touch screen of delivery section

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.