

SD-1050W


High Speed UV Spot and Overall Coating Machine



Machine Introduction

High Speed UV Spot and Overall Coating machine researched and developed by sheng shun adopts upper-swaygripper-pass-sheet method to enable max speed up 9000 sheets/hour. UV curing system with Teflon conveying belt has characteristic of higher speed, precise orientation and UV curing higher efficiency and lower power consumption. After sheet traveling through UV coater and being transferred directly by Teflon belt, grippers can not be heated by high temperature from UV light, which prevent them from being damaged or deformed to ensure easy maintenance.

Features

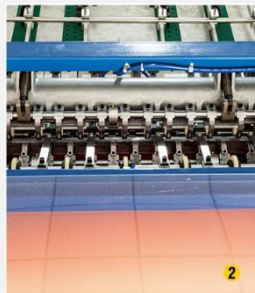Details	Picture
Feeder High speed feeder with four sucking and four forwarding suckers can feed sheet smoothly.	
Sheet Transferring Unit Upper swing sheet transferring method can transfer sheet smoothly at high speed to pressure cylinder exactly.	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Varnish Supply

Steel roller and rubber roller with metering roller reversing and doctor blade design control varnish consumption and volume to meet the demand of products and operate easily. (Varnish consumption and volume are determined by LPI of ceramic anilox roller)



Transferring Unit

After sheet is transferred from pressure cylinder to gripper, air volume blowing for paper can support and reverse sheet smoothly, which can prevent sheet surface from being scratched.



Conveying Unit

Upper and lower conveying belt can form thin sheet to be curved for smoothly delivery.



Sheet Delivery

Automatic pneumatic patting sheet controlled by photoelectric detecting sensor make sheet pile fall automatically and collect sheet neatly. Electronic control can take out sheet sample safely and quickly for inspecting.



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



SD-1050W

High Speed UV Spot and Overall Coating Machine

Floor Plan

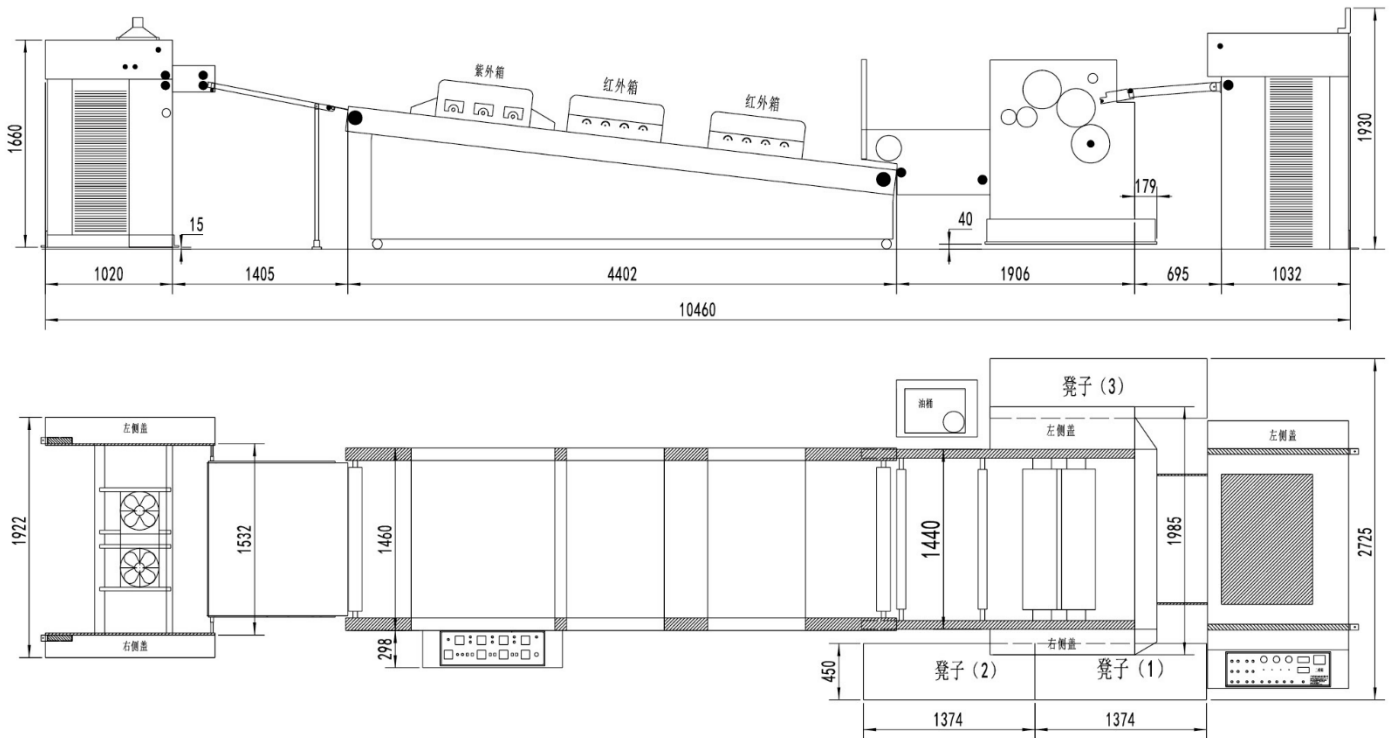

Technical Specifications

Model	SD-1050W
Max. sheet size	730x1050mm
Min. sheet size	310x406mm
Max. coating area	720x1040mm
Sheet thickness	80~500gsm
Coating registration accuracy	± 0.2mm
Production speed	9000sheets/hour
Power required	44kw (E) / 40kw (W)
Dimension (LxWxH)	10460x2725x1930mm
Machine Weight	8000kg

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

