




Machine Introduction

JB-1050UVJW is specially designed for using with automatic screen-printing machine, offset machine and other equipment. It is widely used for drying, dehumidifying and UV curing etc. in the field of screen printing, printing, and dyeing, electroplating, electronic circuit board and so on.

Diagram:

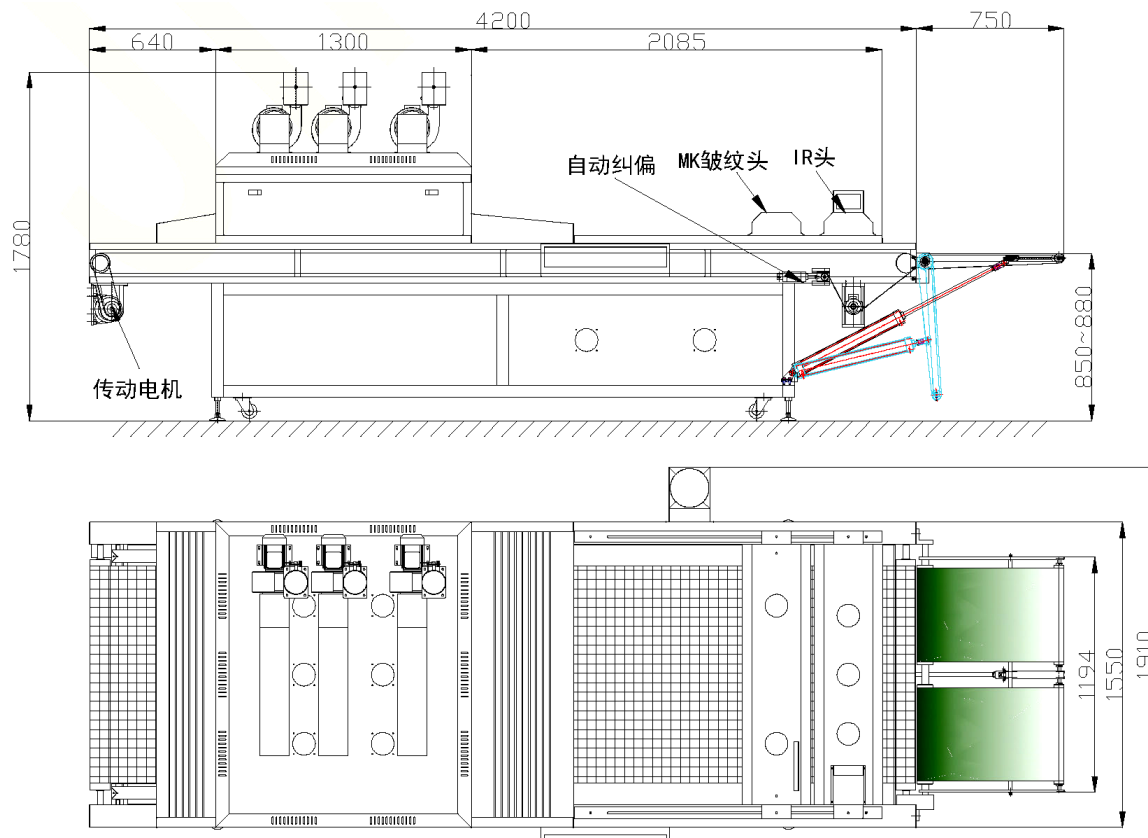

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Main features:

1. Three groups of stepless regulating light source, independent control, digital instrument real-time indication of the working state and service life.
2. Adopt special aluminum magnesium alloy lampshade, focusing design, high production efficiency.
3. Equipped with a reasonable cooling system, two groups of independent lampshade heat dissipation, the lower part of the adsorption system, to prevent the work chamber temperature is too high, resulting in substrate deformation.
4. The conveyor belt automatic correction system with adsorption system, easy to use, more conducive to the paper conveying; imported Teflon (TEFION) mesh belt, high temperature resistance, friction resistance, stable use to ensure long time.
5. Conveyor frequency stepless speed regulation, visual production adjustment, conveying speed, up to 60 meters / min.

The advantages of stepless variable power light source compared with common transformer controlled UV light source:

- Wide energy range output: the output power of the lamp tube is 30% to 100%, stepless adjustable.
- High power conversion rate: about 20% higher than traditional transformer drive UV energy, and can effectively extend the lamp life.
- High efficiency, energy saving and environmental protection: effectively reduce the loss and reactive power of traditional transformers, save about 40% of the power consumption compared to the same year.
- Comprehensive intelligent protection: more than 20 professional protection alarm mechanism, such as overheating of tube, parameter error of lamp tube, disconnection of lamp tube, etc.
- High intelligent power adaptation: standby settings, no material input, 30% power standby; the material is in, within 0.5 seconds automatically to set the power.
- The perfect use of safety: avoid the traditional transformer heating and wiring complex caused by security risks.

Technical Specifications

Model	JB-1050UVJW
Convey speed	60m/min
UV lamp power	9.7 KW×3pcs x stepless
Wrinkle lamp power	80W×3pcs×2choice
IR heating for ink smooth power	1.5 KW×3pcs
Curing width	1100 mm
Convey motor power	400 W
Adsorption fan power	2.2 KW
Exhaust fan power	0.37 KW ×3
Small fan	40 W×13pcs
Total power	3P 380V 50Hz 95A
Total Weight	1200 Kg
Overall size (LxWxH)	(4.2+0.75)×1.91×1.78 m

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Configurations

No	Name	Model	Qty	Brand
1	UV Lamp	9.7KW 1280mm length	3	Xinguang
2	Stepless adjusted controller	10KW	3	Italy
3	Inverter	FR-D720S-0.4K	1	Mitsubishi
4	AC contactor	MILM07-10C	6	Moeller
5	AC contactor	MILM32-10C	3	Moeller
6	Breaker	PL9 1P C3	1	Moeller
7	Breaker	PL9 1P C5	1	Moeller
8	Breaker	PL9 1P C15	1	Moeller
9	Breaker	PL9 3P C25	1	Moeller
10	Breaker	PL9 2P C20	1	Moeller
11	Power switch	Y090 660V 10A	1	Hongbo
12	Panel switch	A22 Series	8	Moeller
13	Time meter	H7ET-BVM	3	Omron
14	Convey motor	CH22	1	CPG
15	Exhaust fan	380V 0.37KW 2800r	3	ANDA
16	Adsorption fan	380V 2.2KW 2800r	1	ANDA
17	Correcting cylinder	MAL 40×25	2	LAST ONE
18	Two-link	UFR-02	1	SHAKO
19	Solenoid valve	BM520	2	SHAKO
20	Convey belt	1100MM width	1	TELFON
21	Wrinkle lamp	80W 1230mm length	3	ZHAOYANG
22	Ballast	YZ40ZN	6	HUAQIANG

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA