



Machine Introduction

Window Patching Machines are widely used for sticking films on the windows of various color window boxes, color boxes and paper boxes, e.g medicine box, shirt box, etc. ZKT-700 is the Innovation Machine of Window Patching Machine, Manufactured & Designed by our own Technical Team.

Machine Features



Paper Feeder

The paper feeder is **controlled by PLC with a human-computer interface**. The length of paper to be fed without adjustment, so that paper can be input quickly and accurately. Also, it applies to card paper and corrugated paper.



Film Feeding Part


Film Feeding Part is controlled by the **Imported Servo System**, input the needed Film's Length on the Touch Screen, Saving the adjust time and highly precision.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



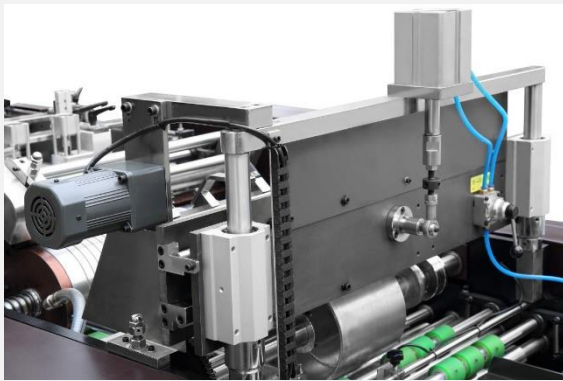

The Gluing Section

The Gluing Part have been improved, more easily adjustment. **The working principle is pneumatic principle, gluing in the basis of the window position, don't need the big gluing plate, is easier for cleaning.**

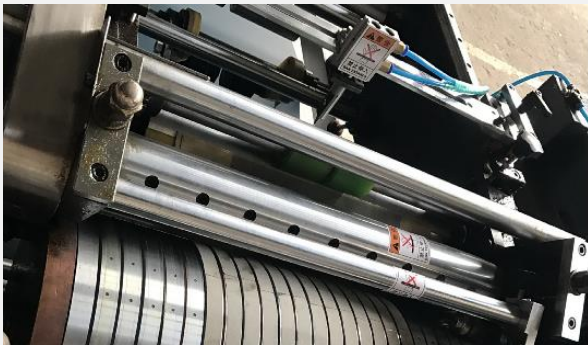

Function

Based on the original mechanism, the layout of each section of this product has been improved in order to reduce the adjusting time, so that it becomes more efficiency and friendly.

Technical Specifications


	Paper Length: 160 - 680mm	Paper Caliper: Paper box & cardboard box 250-1000g/m2, Corrugated/flute up to 3mm	Single line Speed: 9000-21000pcs/h
	Paper Width: 120 - 700mm		
	Film Length: 60 - 330mm	Film Thickness: 0.03 - 0.25mm, OPP, PVC, PET, PE etc.	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



	Film Width: 30 - 400mm	Film Thickness: 0.03 - 0.25mm, OPP, PVC, PET, PE etc.	Single line Speed: 9000-21000pcs/h
Power of Pump: 1.5 kw, Main Power: 2.2 kw			
Weight: 2300 kg			
External Dimension: 6200*1580*1700 mm			

Configuration List

Servo Motor	Japan Yaskawa
Relay	Omron
PLC	Panasonic
Touch Screen	Kunluntongtai
Drive	RIBO or Japan Toshiba (optional)
Power Switch	Schneider
Switch Button	Schneider



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

