


# Autoprint Fine Coat 65

## UV Coating Machine

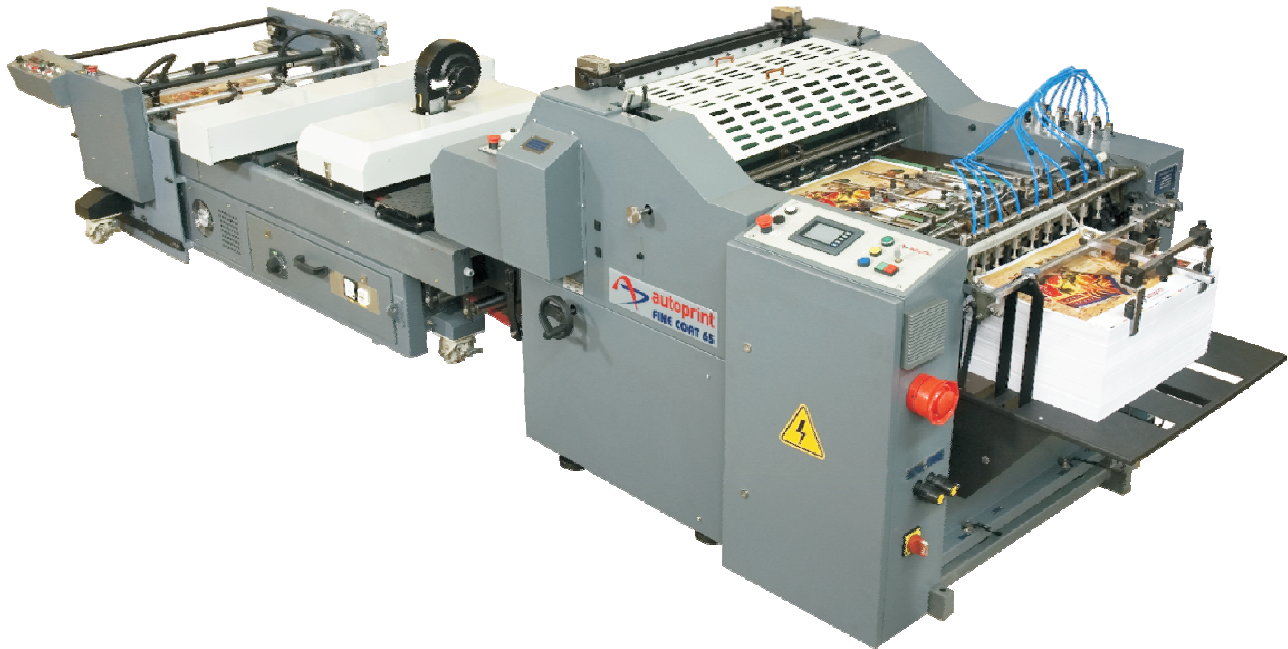

### Machine Introduction

For years, lamination has been used to protect printed matter and enhance print value. In the recent past, however there has been increasing concern over the environmental impact of traditional lamination methods. The durability of lamination has also been questioned. Addressing both these issues effectively while enhancing visual appeal of the printed material is the Autoprint Fine Coat 65, an offline UV Coating Machine that helps you add value to your print job and tap the growing potential in this market segment.

### Features:

1. Single sheet feeder
2. Pull type side lay
3. Coating unit with Anilox Roller and Doctor blade
4. Centralized touch screen control panel
5. Varnish pump / Duct
6. Rigid Delivery gripper
7. Double sheet detector
8. Plate Cylinder for Full / Spot coating
9. Removable Cylinder gripper
10. Adjustable Delivery guides
11. Blow Bar for Precies Paper Dropping
12. ultra sonic double sheet detector ( optional )

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



**PT. EKA MAJU MESININDO**  
Jl. Terusan Bandengan Utara No.16 / B 3-4  
Jakarta, 14450, Indonesia  
Tel. (021) 660 2665, 661 8255.  
Fax. (021) 668 5874, 660 2657

**34 YEARS**  
**SERVING**  
**INDONESIA**

### Technical Specifications

|                                            |                                        |
|--------------------------------------------|----------------------------------------|
| <b>Model</b>                               | <b>Autoprint Fine Coat 65</b>          |
| Maximum paper size                         | 480x660 mm (19"x26")                   |
| Minimum paper size                         | 125x175 mm (5"x7")                     |
| Maximum coating area                       | 465x645 mm                             |
| Paper thickness                            | 60-350 gsm                             |
| Coating speed                              | 2000-5500 sph                          |
| Feeding system                             | Single sheet                           |
| Blanket size                               | 510x660x1.65 mm                        |
| Polymer plate thickness (for spot coating) | 1.6 mm                                 |
| Gripper margin on plate                    | 40 mm                                  |
| Gripper margin on paper                    | 10 mm                                  |
| Gripper bite                               | 5 mm                                   |
| Circumferential image micro adjustment     | 20 mm                                  |
| Registration accuracy                      | ± 0.5 mm                               |
| Pull lay fine adjustment                   | ± 1.5 mm (Pull lay)                    |
| Delivery system                            | Chain delivery                         |
| Varnish unit                               | 2 Roller with anilox and doctor blade  |
| Coating thickness                          | 3 gsm                                  |
| Lubrication system                         | Centralized lubrication system         |
| Power consumption                          | 3 kw (4 hp) Main M/c, 10 kw for drier  |
| Dimension (LxWxH)                          | 4580x1835x1380 mm (machine with dryer) |

\* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



**PT. EKA MAJU MESININDO**  
 Jl. Terusan Bandengan Utara No.16 / B 3-4  
 Jakarta, 14450, Indonesia  
 Tel. (021) 660 2665, 661 8255.  
 Fax. (021) 668 5874, 660 2657

**34 YEARS**  
**SERVING**  
**INDONESIA**