



Machine Introduction

Features:

- Complete design, accurate installation, high stability, high security, low noise.
- Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability.
- High precision interval mechanism, high cutting precision, running steadily.
- Adopt European feeder, suction adjustable, steadily, precise, good paper applicability.
- Non-stop feeding, pre-stacking and delivery device can shorten the auxiliary time, improve the efficiency.
- Automatic pressure adjust system, pressure digital display.
- Human-friendly designed die frame and base plate, makes installation, adjustment convenient.
- Pneumatic die locking device, die frame fixed more steadily, accurately, time saving.
- Front lay, side lay, feeding device fine tuning device, paper positioning more accurate,
- Double, crooked, no-sheet optoelectronic position control, ensure the paper in the right position, reduce waste.
- Electronic control module design, adopt imported electronic components, ensure the accuracy and reliability.
- Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, troubleshooting more convenient.
- Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability.
- Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to let better durability.
- (Optional)5+2mm thin plate system, reduce the makeready time.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	AEM-1080B
Max. paper size	1080x780mm
Min. paper size	400x330mm
Max. cutting size	1075x770mm
Die frame inner size	1100x790mm
Cutting plate size	1080x780mm
Min gripper edge size	7mm
Cutting precision	$\leq \pm 0.1\text{mm}$
Max. cutting pressure	300T
Max paper size	1080x780mm
Min paper size	400x330mm
Max cutting size	1075x770mm
Die chase inner size	1100x790mm
Cutting plate size	1080x780mm
Min gripper margin size	7mm
Cutting precision	$\leq \pm 0.1\text{mm}$
Max. cutting speed	7000S/H
Pre-stacking height	1550mm
Delivery stack height	1400mm
Application	Cardboard 0.1~2mm
	Corrugated paper < 4mm
Main motor power	11KW
Total power	17.8KW
Machine dimension	4880(+1650)x2100(+1600)x2350mm
AEM-1080 weight	14T
Compressed air	6-7bar, 300LPM

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



Standard Configuration

Feeding section:

- ★European technic precise feeder, fit both paperboard and corrugated paper. 4 suction 4 send, can adjust angle and height of suction nozzle according to the paper distortion.
- ★Double side lay (pull and push).
- ★Feeding device fine tuning, non-stop adjust.
- ★Electronic double sheet detector.
- ★Main, secondary feeding device no-stop switch.
- ★Wear-resisting PU pressing wheel.
- ★Dual purpose loader.
- ★Feeding time fine tuning device.




Die cutting section:

- ★Pressure-bearing part is made of high ductile iron QT500, high strength, never deform.
- ★Alloy crankshaft with special process treatment.
- ★Wear resisting worm, worm gear.
- ★Convenient die flipping device.
- ★High precision intermittent device.



- ★Pneumatic clutch from Italy
- ★Import gripper bar chain.
- ★Pneumatic die locking device.
- ★High hardness, strength Ti-Al alloy gripper.
- ★Precise pressure adjust device.
- ★PLC and man-machine interface from Taiwan.

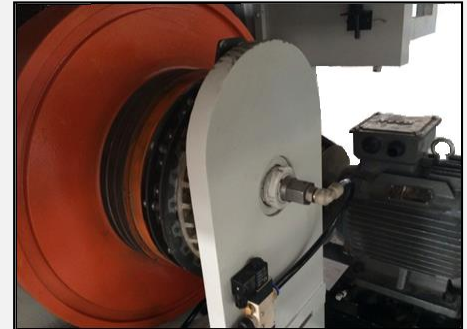

Delivery section:

- ★Automatic aligning device, 2 blowing devices ensure all the paper could be well delivered whether thin or thick.
- ★Delivery section with control panel, more human-friendly.
- ★Optoelectronic sensor ensure better Delivery.
- ★Automatic delivery board control system.
- ★Manual delivery device
- ★Main chain protection device
- ★Rolling back preventing device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



Main Part List

No	Name	Brand	Origin	No	Name	Brand	Origin
1	Shell, main structure	QT500-7 ductile iron	China	18	Lubricate oil pump	WLP	Taiwan
2	Die cutting plate	75Cr1alloy steel	Germany	19	Bearing	NSK	Japan
3	Worm, Worm gear	XINGTANG	China	20	Linear guide rail	HIWIN	Taiwan
4	Crankshaft material	Ni-Cr-Mo alloy	China	21	Fastener	GEN-Year	Taiwan
5	Gripper bar	Aluminum alloy	China	22	Inverter	Panasonic	Japan
6	Gripper	manganese steel	China	23	HMI	TAISEE	Taiwan
7	Cam indexing unit	HADEX	Taiwan	24	Sensor	Panasonic	Japan
8	Main transmission chain	TYC	Taiwan	25	PLC controller	FATEK	Taiwan
9	Secondary chain	KMC	Taiwan	26	Encoder	KUBLER	Germany
10	Rotary joint	SMC	Japan	27	Oil pressure switch	AIRTAC	Taiwan
11	Pneumatic solenoid valve	AIRTAC	Taiwan	28	Proximity switch	FOTEK	Taiwan
12	Air volume regulator	AIRTAC	Taiwan	29	Relay	SCHNEIDER	France
13	Main motor	TECO	Taiwan	30	Optoelectronic switch	Panasonic	Japan
14	Main feeding motor	DUNGLEE	Taiwan	31	Button	SCHNEIDER	France
15	Delivery lift motor	DUNGLEE	Taiwan	32	AC contactor	SCHNEIDER	France
16	Vacuum pump	TONGYOU	China	33	Circuit breaker	SCHNEIDER	France
17	Cylinder	AIRTAC	Taiwan	34			

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

