


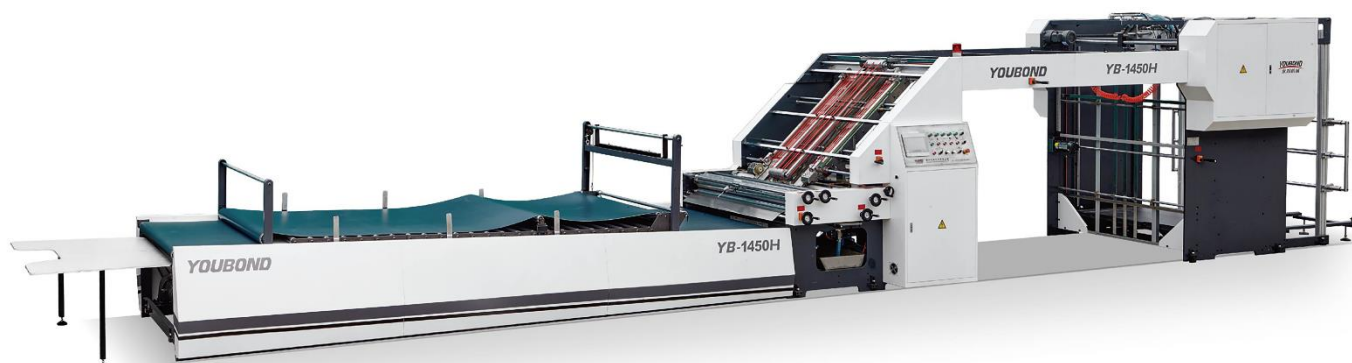

Machine Introduction

This machine adopts the motion control system and servo correction device perfect combination, the use of multiple sets of photoelectric sensors at bottom sheets relative position, control top sheets on both sides of the servo motor to do independent compensation action, so that accurate positioning of top paper and the bottom paper. Servo laminating machine is simple for operation, just enter the paper size, machine can automatically finish adjustment.

Features:

- Max speed 12000 SPH
- One-key commission 20S completion
- Cardboard to flute & cardboard to cardboard
- Servo compensation positioning
- Top sheet left and right all course correction

Technical Specifications

Model	YB-1450H
Max. sheet size	1450x1450mm (57"x57")
Min. sheet size	400x400mm (16"x16")
Top sheet thickness	120-500g
Bottom sheet thickness	A, B, C, E, F (corrugated paper), (four ply corrugated paper), (cardboard above 300GSM)
Fitting precision	±1mm
Air consumption	0.2m ³ /min
Measurement	15.5 x 2.4 x 2.4M
Machine power	22kwz
Glue application	white glue, starch glue

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



BRANCH INTRODUCTION



■ 底纸系统 BOTTOM PAPER FEEDING

采用进口伺服电机控制系统，配备日本富士达吸风皮带，吸力大小变频调节，专利技术保证瓦楞纸及卡纸都能顺利出纸，且操作简单。


Use imported Servo motor electric controlling system, with Japan NITTA suction belt to make suction power inverter, and belt cleaned by water roller; Patented technology to ensure corrugate and cardboard goes out smoothly and simple operation.



■ 飞达系统 TOP SHEET FEEDING MECHANISM

配备高速自动专用飞达头，提纸吸嘴能自由调节提纸角度，送纸吸嘴能调节送纸角度，不论厚纸或薄纸，保证了走纸高速、平稳。

Equipped with high speed auto dedicated feeder, both paper lifting and feeding nozzle can freely adjust angle to the paper, to ensure that whether thick or thin paper can be delivered rapidly and smoothly.

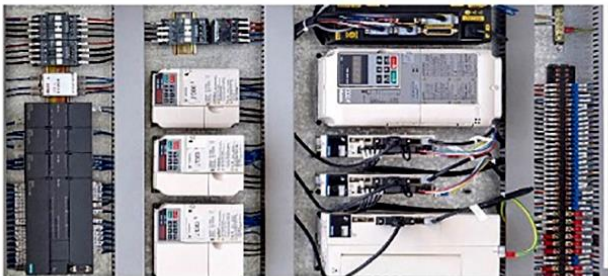

■ 电器系统 ELECTRICAL SYSTEM

依照欧洲 CE 标准设计，保证整机稳定、高效率、故障低。以人机界面与 PLC 结合，将警告、侦测故障、异常状况及操作速度等各项信息显示在屏幕上，一目了然。


Designed in the accordance with European CE requirement, ensure machine stability, high efficiency and low failure. Using man-machine interface and PLC combination, display all the information, such as warning, error detect, failures, and operating speed, etc on the screen at a glance.



■ 预堆纸部分 PRE-STACK PART

可在不停机的状态下预堆好下一堆面纸，提高效率。特殊设计的工字型预堆纸架，更省时省力。


Pre-stack pile of paper under the condition of non-stop, improve efficiency. The special design of the pre stack paper frame, save time and effort.

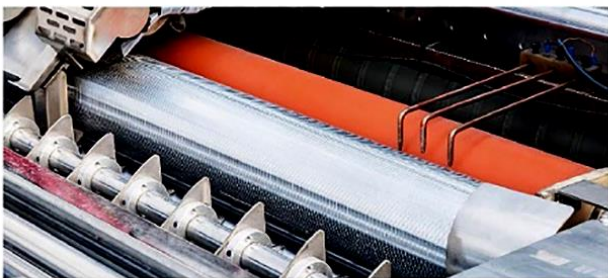

■ 上胶系统 GLUE ROLLER

采用不锈钢胶水辊，永不生锈，精细研磨后，胶水量调至最小时保证胶水均匀。下辊采用水辊清洗。

Stainless steel roller, never rust, after narrowly grinding, guaranteed the minimum amount glue coated evenly. Down roller be cleaned by water roller.

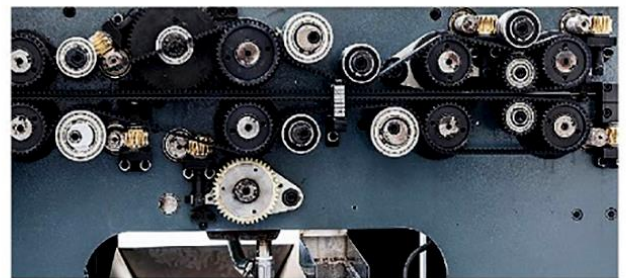

■ 传动系统 TRANSMISSION

采用进口双面齿同步带传动，配备瑞士罗达张紧装置，保证了传动精准、平稳、低噪音。

With imported double teeth belt drive and Switzerland ROSTA tension device ensure the drive accurate, stable and low noisy.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657





■ 定位系统 POSITIONING SYSTEM

利用多组光电感知底纸前进相对位置，控制面纸两侧伺服电机做独立补偿动作，使面纸与底纸精准贴合。
The use of multiple sets of photoelectric sensor at bottom sheets relative position, control top sheets on both sides of the servo motor to do independent compensation action, so that accurate positioning of top paper and the bottom paper.



■ 前缘送纸系统 (选配) LEADING EDGE FEEDING SYSTEM (OPTION)

可选配前缘送纸机构，适应各类大尺寸厚纸板送纸。
This system is for option, more suitable for large size and thick bottom sheets.

CONFIGURATION LIST



运动控制器 Motion Controller

产地：美国 USA

品牌：派克 PARKER



伺服驱动器 AC Servo driver

产地：日本 Japan

品牌：安川 YASKAWAN



伺服电机 Servo Motor

产地：日本 Japan

品牌：安川 YASKAWA



变频器 Frequency Converter

产地：德国 Germany

品牌：西门子 SIEMENS



可编程控制器 PLC

产地：德国 Germany

品牌：西门子 SIEMENS



主电机 Main Motor

产地：德国 Germany

品牌：西门子 SIEMENS



气泵 Air Pump

产地：德国 Germany

品牌：贝克 BECKER



同步带 Synchronous Belt

产地：德国 Germany

品牌：马牌 CONTINENTAL



轴承 Bearing

产地：日本 Japan

品牌：NSK



吸风皮带 Suction Belt

产地：日本 Japan

品牌：霓达 NITTA



张紧器 Tension

产地：瑞士 Switzerland

品牌：罗达 ROSTA



离合器 Clutch

产地：台湾 Taiwan

品牌：研新 YAN

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657





接触器 Contactor

产地：法国 France

品牌：施耐德 Schneider



电磁阀 Solenoid valve

产地：美国 USA

品牌：MAC



按钮开关 Push Button

产地：法国 France

品牌：施耐德 Schneider



低压电器 Low Voltage

产地：法国 France

品牌：施耐德 Schneider



弹簧 Spring

产地：日本 Japan

品牌：大同 DAIDO



PU圆带 PU Round belt

产地：以色列 Israel

品牌：VOLTA

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

