


QZX 92CG

Hydraulic Double Digital Display Paper Cutter Machine

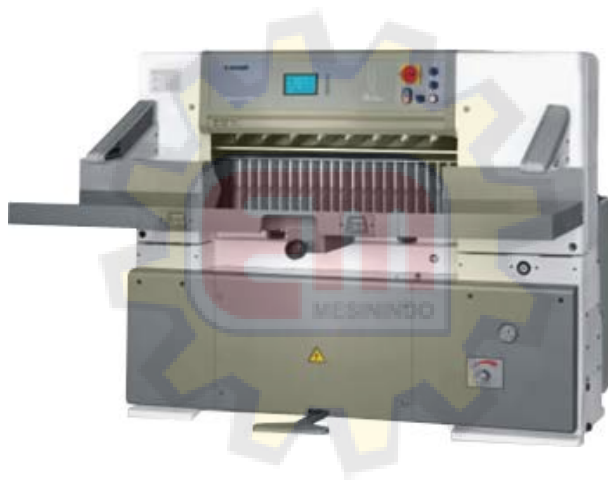


Graphic
Machinery

Paper
Cutting
Machines

01 Description

This machine adopts stable hydraulic driving system and adjusts table pressure. Electromagnetic clutch of stable running, high precision, strong cutting pressure, high efficiency is used for cutting paper, the double digital-display paper-cutter use position detecting system. The cutting dimensions are displayed on the liquid crystal screen, resolution rate can be up to 0.10mm. Paper-feeder adopts double guide-rail slot-less working table system to ensure the cutting precision, reading precision and simultaneously display the front and rear sizes. Also, the machine is equipped with some safety devices: IR ray protective device is more convenient for cutting with optical knife-line alignment, button operated by two hands, single circulation cutting device ect.

02 Configuration

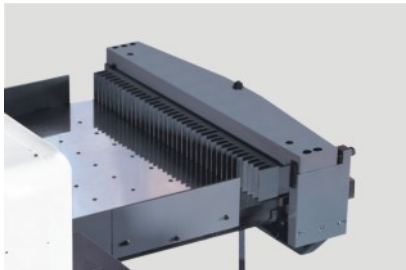

03 Features

- 01 Makes paper impeller run smooth, low noise, accurate positioning, enhance the cutting precision and speed greatly, prolong the service life of paper cutter.
- 02 The working tables are all chrome-plated and equipped with air balls which makes paper-pushing easily and rusty-proof. Large side working table (1000*800) is optional.
- 03 IR photoelectric protection, buttons by two hands safety devices.
- 04 Safety device for knife bed, overloading protection for cutting, automatic return safety device.
- 05 Imported hydraulic components are adopted in hydraulic system, the pressure can be adjusted.
- 06 Mechanical assistance device for knife replacement makes knife replaced quickly and safely.
- 07 Equipped with the optical knife alignment to make cutting more convenient.
- 08 Ejecting device for knife bar.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012

QZX 92CG

Hydraulic Double Digital Display Paper Cutter Machine



04 Technical Specification

Model			92CG	78	92	115	130	137	155	166	186
Cutting width	L	Cm/In	92/36.2"	78/30.7"	92/36.2"	115/45.3"	130/51.2"	137/54"	155/61"	166/65.4"	186/73.2"
Max. cutting height without assistance pressing plate	K	Cm/In	11/4.3"	13/5.1"	13/5.1"	16.5/6.5"	13/5.1"	16.5/6.5"	16.5/6.5"	16.5/6.5"	16.5/6.5"
Max. cutting depth	D	Cm/In	93/36.5"	78/30.7"	93/36.5"	115/45.3"	130/51.2"	145/57"	155/61"	166/65.4"	195/76.8"
Min cutting depth without assistance pressing plate		Cm/In	2.5/1"	2.5/1"	2.5/1"	3/1.2"	3/1.2"	3/1.2"	3/1.2"	3/1.2"	3/1.2"
Extended length of working table	J	Cm/In	65/25.6"	64/25.2"	65/25.6"	73/28.7"	73/28.7"	74/29.1"	75/29.5"	75/29.5"	75/29.5"
Height of working table	G	Cm/In	86/33.9"	86.5/34"	86.5/34"	89/35"	86.5/34"	91/35.5"	90/35.5"	90/35.5"	90/35.5"
Machine width including side working table	A	Cm/In	192/75.6"	215/84.6"	233/91.7"	266/104.7"	266/104.7"	287/113"	314/123.6"	322/126.8"	375/147.6"
Total length of working table	F	Cm/In	198/78"	178/70"	198/78"	226/89"	241/95"	259/102"	280/110.2"	283/111.4"	355/139.7"
Cutting speed		r/min	30	45	45	45	45	45	42	42	40
Max. paper pressure		N	30000	30000	35000	40000	40000	45000	55000	60000	65000
Power of main motor		Kw	2.2	3	3	4	4	5.5	5.5	5.5	7.5
Motor for paper feeding		Kw	0.37	0.37	0.37	0.55	0.55	0.55	0.75	0.75	0.75
Air pump		Kw	0.55	0.55	0.55	0.75	0.75	0.75	0.75X2	0.75X2	0.75X2
Machine weight		Kg	2200	2600	2900	4600	3900	4500	5000	5500	6600
Overall dimension (LxWxH)		In	90x56x73"	83x56x77"	89x56x77"	101x63x85"	103x61x77"	111x63x85"	117x65x85"	124x63x85"	134x72x91"
Blade specification (LxWxH)		In	43.3x5x0.5"	37.8x5x0.5"	43.3x5x0.5"	54.7x6.3x0.54"	59.8x5x0.5"	63.2x6.3x0.54"	70.3x6.3x0.54"	75x6.3x0.54"	83.5x6.3x0.54"

Model	QZYW-C	QZYK-C	QZYK-S	QZYX-C	QZX-CG
Imported ball lead screw	★	★	☆	○	○
Imported double guide-rail slot-less working table	★	★	★	★	★
Chrome-plated main and assistance working table with air ball	★	★	★	★	★
IR photoelectric protection and hands operating protection	★	★	★	★	★
Ejecting device for cutting stick	★	★	★	★	★
Inside electronic knife locker	★	☆	○	○	○
Safe and convenient knife replacement system	★	★	★	★	★
Overloading protection device for cutting	★	★	★	★	○
Flat worm speed reducer transmission	★	★	★	★	○
Optical knife alignment	★	★	★	★	★
PLC control system	★	★	○	○	○
Imported hydraulic system	★	☆	☆	☆	○
Imported electric components	★	★	★	★	★
Soft pressure	★	☆	☆	○	○
Enlarge side working table	☆	☆	☆	○	○

★ Standard configuration ☆ Optional configuration ○ Without this configuration

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012