

JY-106E

Automatic Diecutter With Stripping Machine



Scan for YouTube video

Machine Introduction

Function: Diecutting, Stripping, Embossing and Creasing

Substrates: Cardboard 80g/m² up to 5mm corrugated paper. plastic material.



Feeder




Aluminum Supporting Base



Feeding Table




Gripper Finger

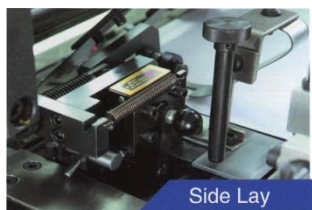

Side Lay



Gripper Bar

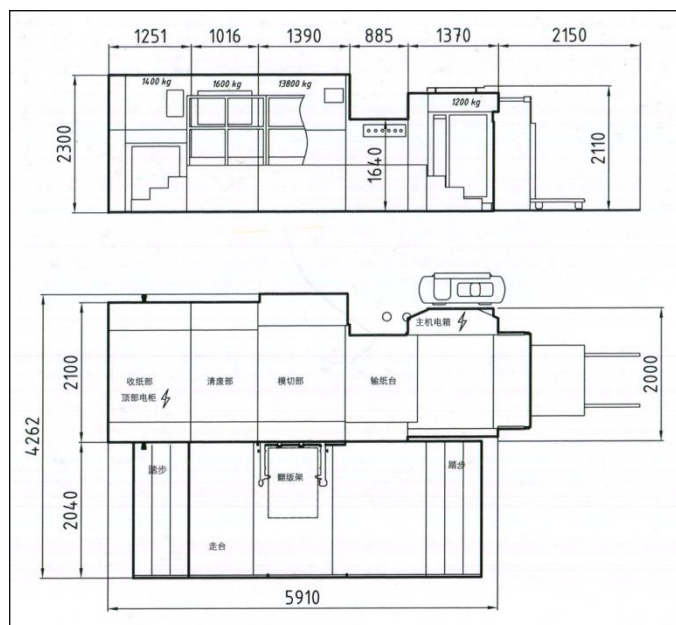

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



Features:

1. Equipped with world's most famous German design KBA-mms feeding system
2. Whole machine is risen making the maximum pile height up to 1600mm, also equipped with non-stop feeding device
3. There are 4 suction cups each for lifting paper and 5 other suction cups for moving paper; Height and angle of suction heads are easily adjustable
4. The up and down of pile table can be adjusted by double-speed control system while micro-adjustment is available for transversal position of pile table
5. Lateral blowing system is adopted to enhance paper separation. To detect double sheet during transportation, we have electronic sensor to do so
6. The installation of anti-obstacle device on the feeding section is to prevent obstacle from entering into the machine which may cause damages to the machine
7. 2 front lays with micro-adjustment features accurate paper positioning
8. On both sides of the feeding table, there are pull and push side lays. The sensitivity of the photo sensors on side lays and front lays can be adjusted to detect black paper or transparent plastic film
9. Easy changeover of pull and push side guides simply by turning a bolt without the need of removing and replacing complete side guide
10. The speed of feeding belt is adjustable
11. Optional: Pre-loader, Anti-static/thin paper air-blow device for diecutting plastic sheet, Slow-down device-suitable for funning thin paper and high speed diecutting which helps to increase diecutting accuracy
12. Accurate positioning of diecutting chase controlled by precision photocell sensors with automatic check lock device
13. Pneumatic lock-up system on diecutting chase to increase efficiency.
14. With air floating device ensures easy slide in and out of diecutting plate
15. Centerline system on diecutting chase with transversal micro-adjustment ensures accurate registration thus results in quick job changeover
16. Diecutting chase turn-over device makes short set-up of repeated jobs
17. Centerline system on diecutting chase with transversal micro-adjustment ensures accurate registration thus results in quick job changeover
18. Aluminum base plate is under the cutting plate to serve as a cushion to reduce noise and to protect the cutting plate and prolong its lifetime
19. With air floating device ensures easy slide in and out of cutting plate
20. Diecutting chase can choose 4mm+1mm diecutting mode
21. All main drive chains are delivered in pairs from Japan and must undergo a special long-run test
22. Gripper bars with grippers made of lightweight and durable aluminum alloy with ultra hard coat and anodized finish ensure accurate and consistent paper registration
23. Gripper plate in 2 plate design
24. 3-action movement structure with upper, middle and lower stripping frame facilitates die change
25. Stripping pins or male/female die are available for different stripping jobs
26. Match with the centerline registration system in diecutting section, the same system also apply to the stripping section to minimize changeover time. Accurate positioning can increase production efficiency
27. With automatic auxiliary delivery belt table can realize non-stop delivery, maximum pile height up to 1350 mm
28. Safety photo-electric devices prevent over-ascending and over-descending of paper pile
29. Lower air blow system suitable for thin paper diecutting
30. Adjustable depressor brush helps unloading paper from grippers and piling up paper
31. Air-controlled rear alignment board switch design, easy to pick finished product sample
32. Feeder movement and speed control can be adjusted at the delivery section
33. Optional: Tape inserter, Anti-static/thin paper air-blow device

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	JY-106 / JY-106E
Max paper size	1060 x 750mm
Min paper size	450 x 380mm
Max. cutting size	1040 x 720mm
Inside chase	1120 x 760mm
Max. speed	7500 sheets/hr
Max. pressure	300T
Sheet Thickness	80g/m ² up to 5mm B flute corrugated paper
Min. gripper margin	8mm
Max. pile high at feeder	1600mm
Max. pile height at delivery	1350mm
Total Power	22kw
Dimension	JY106: 4910x3010x2300mm JY106E: 5930x4050x2300mm
Weight	JY106: 16.5T / JY106E: 18.5T

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

