



Machine Introduction

PY-950/1200 is an ideal and professional machine in die-cutting, creasing, embossing and full-stripping various PE coated paper, normal paper, corrugating paper and plastic material. It applies to paper cup, paper box, medical package, wine package, food package and other environmental protection products. It adopts micro-computer, HMI, servo positioning, alternating current frequency converter, automatic counting, photoelectric rectifying, and pneumatic lock cutting plate, electromagnetic clutch, centralized oil lubrication, overload protection and distinctive gearing. All of these is the guarantee of steady pressure, precise positioning, smooth running, safety, and reliability operation.

Technical Specifications

Type	PY-950; PY-950P	PY-1200	PY-1300	PY-1450
Production capacity	150-260 times/min (mechanical speed max 260 times)			
Paper conveys width	970mm-300mm	1220-300mm	1320-300mm	1470-300mm
Max. cutting size	950x540mm;950x640mm	1200x640mm	1200x750mm	1450x750mm
Total weight	9T; 9.5T (heavy duty)	10T	12T	14T
Overall dimension	4.35x2.1x1.85m	4.35x2.3x1.85m		
Suitable material	100-800g/m² white cardboard, PE coated paper, Kraft paper, etc.			
Power and air source	14kw; 0.6Mpa; 0.3m³/min; 380V/50HZ (other voltage can be customized)			
Max Roll paper diameter	1800mm			
Cut Precision:	± 0.20mm			

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



Machine Features:


1. Directly coupled servo motor driving with reduce motor, which can speed up to 260 times/min.

- 新送纸胶辊结构 NEW RUBBER ROLLER FOR PAPER FEEDING


NEW

- 固定式送纸平台 IMMOVABLE PAPER FEEDING PLATFORM



- 伺服直联传动 DIRECTLY-COUPLED SERVO MOTOR DRIVING

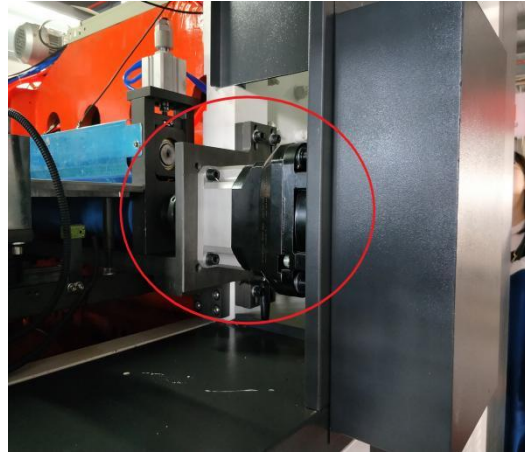

2. Enhanced machine core to take much more pressure, up to 350T.

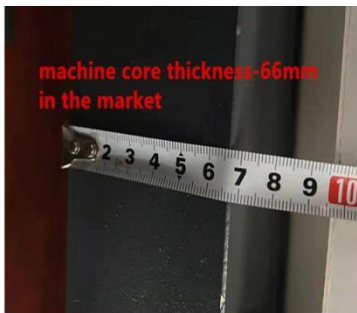

3. Positioning block in movable platform we add one more positioning block in movable platform. It makes the pressure of the platform more stable, and endurable.

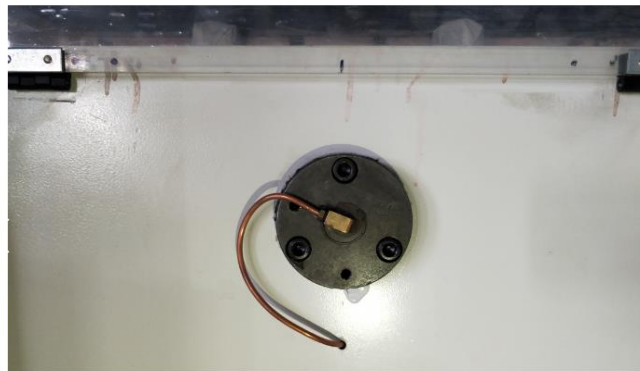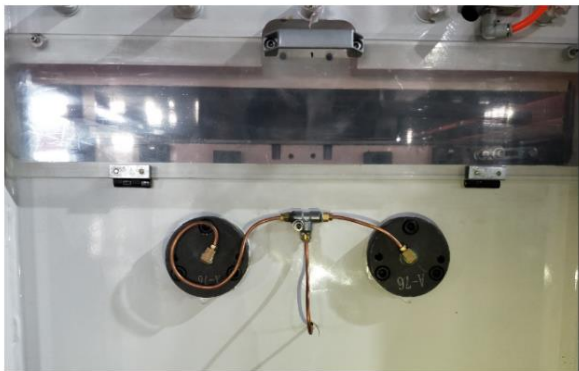

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



4. Oil circuit and oil detection system. The outside oil circuit adds a filter to clear the oil and a flow switch to monitor lacking oil.



5. Machine adopt IOT technology. Not only Customer can supervise the machine operation situation on Mobile APP, manufacture also can through this app to fulfil remote control to provide the aftersales service. So, both of two parts can save the service time and money.

实时数据详情	
汉堡机	
主机显示	
Numero della versione PLC	N/A
Rapporto di sincronizzazione dei mangimi	N/A
Visualizzazione della frequenza	N/A
Lunghezza di movimento Servo	N/A
Posizione del punto di riserva Servo	N/A
Glu cilindro ritardato funzionamento	N/A

实时数据详情	
高速圆筒冲切机103806	
数据显示	
模切长度	139.4
主机待机频率	10
模切速度	19530
单批报警设定	0
班组序号	0
班组计数	1666657
累计计数	1666657

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



6. Paper blocked alarm system. The new design adds the alarm system to make the machine stop when paper feeding blocked.



7. Paper feeding balance regulator add new type paper feeding balance regulator to adjust the minor unbalance situation.



8. Paper roll tension system use proportional valve control, automatic tension control, and easy operation.



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

Machine option items:

1. Air shaftless system

1. It bears much more weight than standard airshaft.
2. It fits any roll paper core sizes.




2. Non-stop collect system

1. Instead of stop running to move the plastic pallet from the machine
2. It saves insert the metal pallet during machine is running, to save the product collect time.



3. male and female plate make the mold change easier.

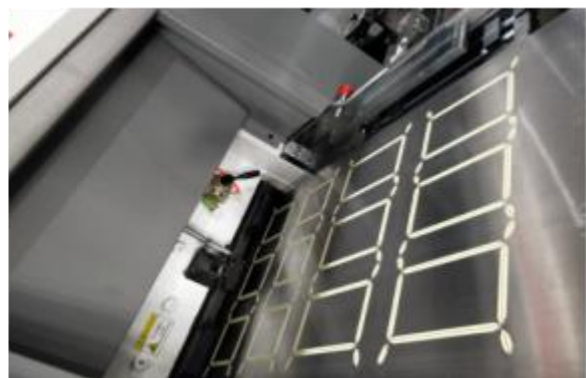

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Machine Components

Components	Item	Brand
Motor	Main motor	GONGTAI (CHINA)
	Servo motor	INOVANCE
	Pressure adjusting motor	MAILI (TAIWAN)
Electric elements	Servo driver	INOVANCE
	HMI	INOVANCE
	PLC	INOVANCE
	Frequency converter	INOVANCE
	All other electrical parts	SCHNEIDER
	relay	OMRON
	bottom	AUTONICS (KOREA)
	Encoder	AUTONICS (KOREA)
	Photoelectric switch	AUTONICS (KOREA)
	photoelectric color mark	PANASONIC (JAPAN)
Pneumatic	Main air cylinder	SMC
	Solenoid valve and other parts	SMC
	pneumatic clutch	SMC

Machine product



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657




PY-950-1450

High-speed Roll Die-Cutting & Creasing Machine

DAKIOU®

Machine product line

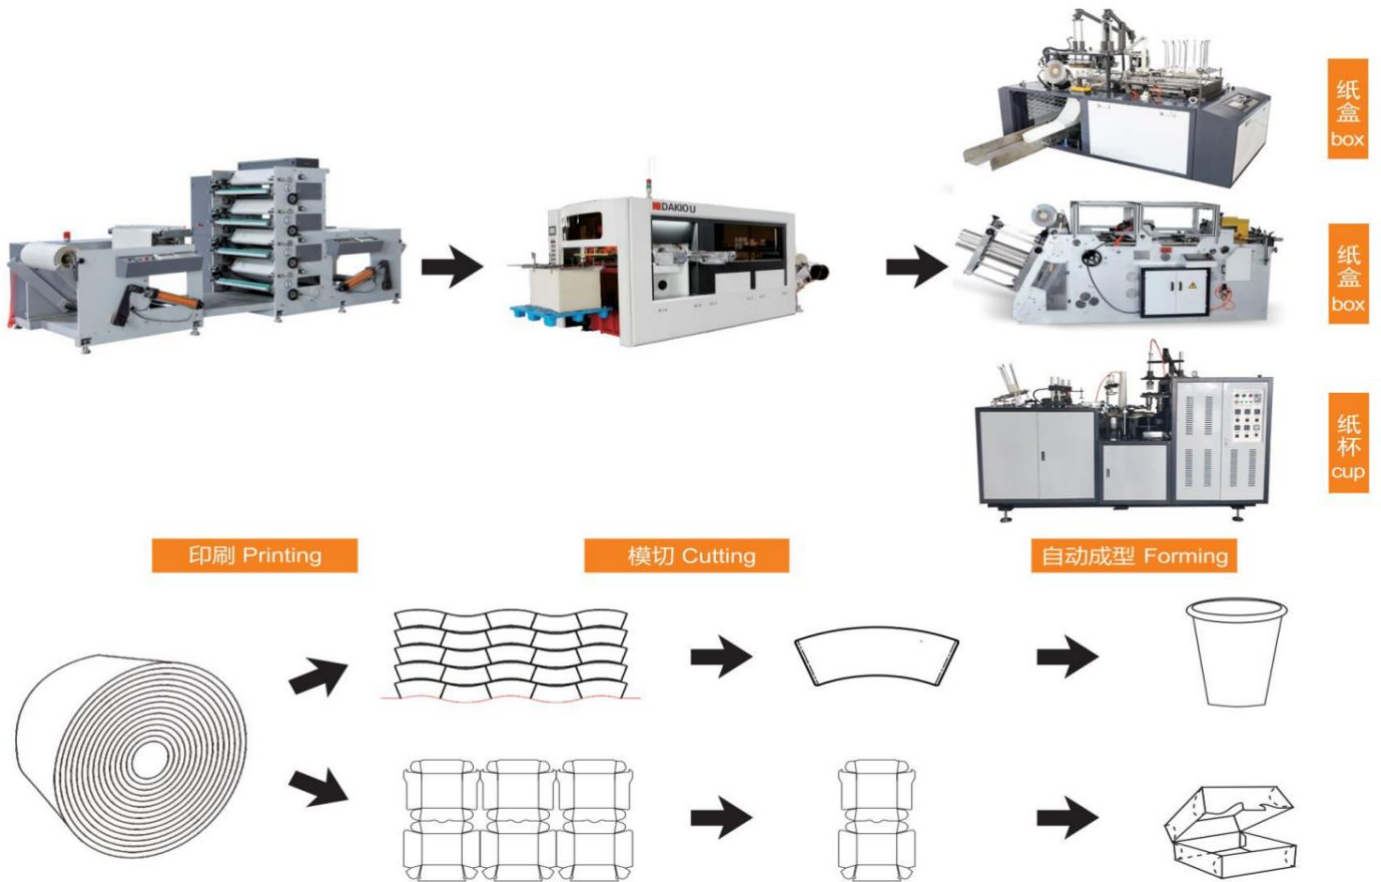

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

