



Machine Introduction

Features:

- Complete design, accurate installation, high stability, high security, low noise.
- Adopt worm, worm gear, crankshaft transmission, high cutting pressure, high durability.
- High precision interval mechanism, high cutting precision, running steadily.
- Adopt European feeder, suction adjustable, steadily, precise, good paper applicability.
- Non-stop feeding, pre-stacking and delivery device can shorten the auxiliary time, improve the efficiency.
- Automatic pressure adjust system, pressure digital display.
- Human-friendly designed die frame and base plate, makes installation, adjustment convenient.
- Pneumatic die locking device, die frame fixed more steadily, accurately, time saving.
- Front lay, side lay, feeding device fine tuning device, paper positioning more accurate,
- Double, crooked, no-sheet optoelectronic position control, ensure the paper in the right position, reduce waste.
- Electronic control module design, adopt imported electronic components, ensure the accuracy and reliability.
- Touch screen man-machine interface, real-time monitor the running situation, makes machine adjustment, trouble shooting more convenient.
- Cycling cooling oil supply system ensure the movement parts get adequately lubricated to ensure the durability.
- Adopt fixed quantity at fixed timing oil supply system, ensure the movement parts get adequately lubricated to let better durability.
- (Optional) 5+2mm thin plate system, reduce the makeready time.


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35 YEARS
SERVING
INDONESIA

Schematic Diagram

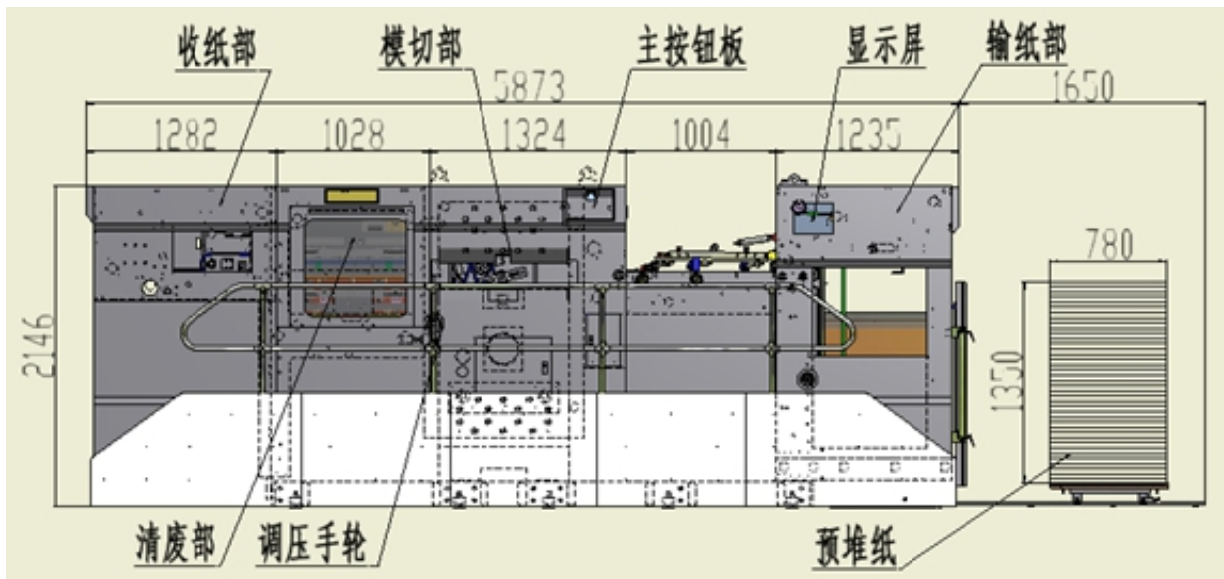

Technical Specifications

Model	AEM-1080Q
Max. paper size	1080x780mm
Min. paper size	400x330mm
Max. cutting size	1075x770mm
Die frame inner size	1100x790mm
Cutting plate size	1080x780mm
Min gripper edge size	7mm
Cutting precision	$\leq \pm 0.1\text{mm}$
Max. cutting pressure	300T
Max. cutting speed	7000S/H
Pre-stacking height	1550mm
Delivery stack height	1400mm
Application	White board 0.1~2mm
	Corrugated paper < 4mm
Main motor power	11KW
Total power	17.8KW
Machine dimension [L(+pre-stacking)xW(+platform)xH]	AEM-1080 : 4880(+1650)x2100(+1600)x2350mm
	AEM-1080Q : 5880(+1650)x2100(+1600)x2350mm
AEM-1080 weight	14T
AEM-1080Q weight	16T

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35 YEARS
SERVING
INDONESIA

Standard Configuration

Feeding section:

- ★European technic precise feeder, fit both paperboard and corrugated paper. 4 suction 4 send, can adjust angle and height of suction nozzle according to the paper distortion.
- ★Double side lay (pull and push).
- ★Feeding device fine tuning, non-stop adjust.
- ★Electronic double sheet detector.
- ★Main, secondary feeding device no-stop switch.
- ★Wear-resisting PU pressing wheel.
- ★Dual purpose loader.
- ★Feeding time fine tuning device.
- ★Additional carriage rod 1 set, carriage plate 2 set.
- ★pre-stacking device 1 set.



Host machine section:

- ★Pressure-bearing part is made of high ductile iron QT500, high strength, never deform.
- ★Alloy crankshaft with special process treatment.
- ★Wear resisting worm, worm gear.
- ★Convenient die flipping device.
- ★High precision intermittent device.



- ★Pneumatic clutch from Italy
- ★Japanese SMC rotary joint.
- ★Import gripper bar chain.
- ★Pneumatic die locking device.
- ★High hardness, strength Ti-Al alloy gripper.
- ★Precise pressure adjust device.
- ★PLC and man-machine interface from Taiwan.
- ★Additional gripper 1set, cutting die 1set, die frame 1 set.



Waste stripping section:

- ★High strength Ti-Al waste stripping frame.
- ★Light waste stripping needle.
- ★(optional) High efficiency pre-install device



Delivery section:

- ★Automatic aligning device, 2 blowing devices ensure all the paper could be well delivered whether thin or thick.
- ★Delivery section with control panel, more human-friendly.
- ★Optoelectronic sensor ensure better Delivery.
- ★Automatic delivery board control system.
- ★Manual delivery device
- ★Main chain protection device
- ★Rolling back preventing device



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35 YEARS
SERVING
INDONESIA

Main Configuration List

1	Shell, main structure	QT500-7 ductile iron	China	22	Bearing	FALA	GERMANY
2	Mold pressing plate	75Cr1 alloy steel	China	23	Linear guide rail	HIWIN	Taiwan
3	Worm, Worm gear	XINGTANG	China	24	Fastener	GEN-Year	Taiwan
4	Crankshaft material	Ni-Cr-Mo alloy	China	25	Feeder		China
5	Gripper bar	Aluminum alloy	China	26	Electromagnetic jaw clutch	SHANGHAI	China
6	Gripper	manganese steel	China	27	Convertor	Panasonic	Japan
7	Cam indexing unit	HUILIN	China	28	Man-machine interface	TAISEE	Taiwan
8	Main transmission chain	IWIS	GERMANY	29	Sensor	Panasonic	Japan
9	Secondary chain	KMC	Taiwan	30	PLC controller	FATEK	Taiwan
10	Pneumatic clutch	OMPI	Italy	31	Encoder	NEMICON	Japan
11	Rotary joint	SMC	Japan	32	Oil pressure switch	AIRTAC	Taiwan
12	Pneumatic solenoid valve	AIRTAC	Taiwan	33	Proximity switch	FOTEK	Taiwan
13	Air volume regulator	AIRTAC	Taiwan	34	Relay	SCHNEIDER	France
14	Feeding belt	HABASIT	Sweden	35	Optoelectronic switch	Panasonic	Japan
15	Brush		China	36	Alarm light		China
16	Main motor	TECO	Taiwan	37	Cable	DELIXI	China
17	Main feeding motor	CPG	Taiwan	38	Button	SCHNEIDER	France
18	Delivery lift motor	CPG	Taiwan	39	Pressure adjusting system	SANKAI	China
19	Vacuum pump	TONGYOU	China	40	AC contactor	SCHNEIDER	France
20	Cylinder	AIRTAC	Taiwan	41	Circuit breaker	SCHNEIDER	France
21	Lubricate oil pump	WLP	Taiwan	42	Terminal	TIANDE	China


* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35 YEARS
SERVING
INDONESIA

Installation Schematic Diagram

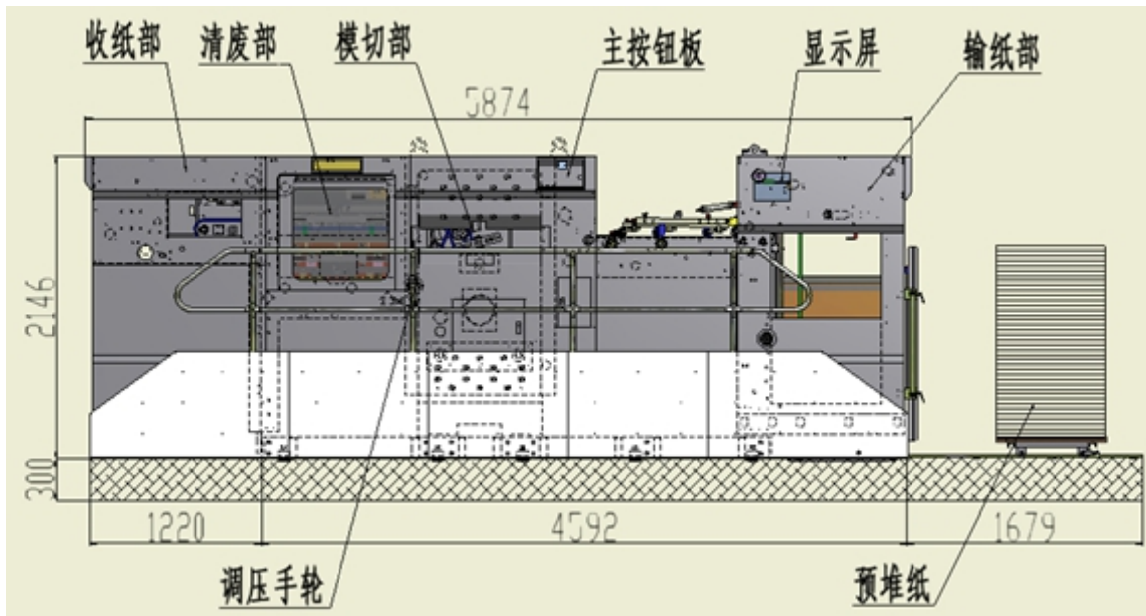

Ground Schematic 1

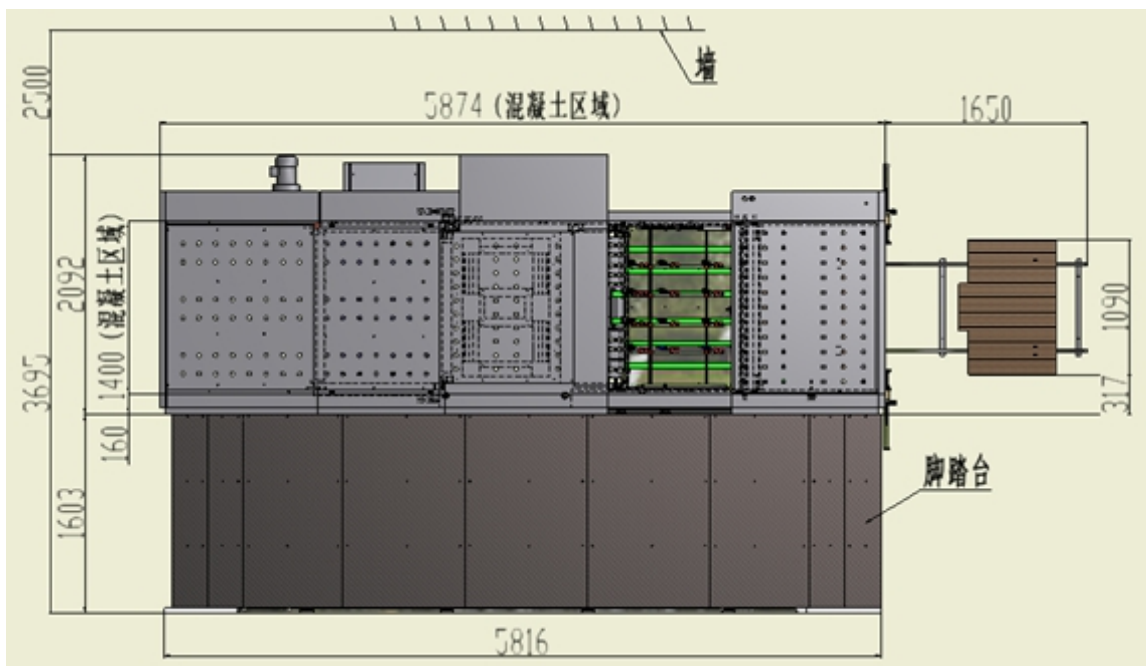

Foundation Diagram 2

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35 YEARS
SERVING
INDONESIA