




Machine Features

Horizontal sealing blade

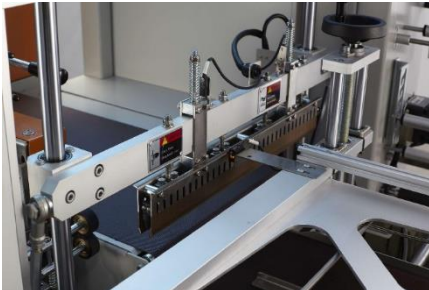

Vertical sealing blade



Waste film collection



POF material device



Electrical panel



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	GPL-5560CI	GPS-7040
Machine dimension	L1930×W1085×H1630mm	L1850×W1095×H1325mm
Packing size	L≥100mm W+H≤550mm H<230mm	L1500×W500×H3000mm
Cutter size / tunnel	L550×W450mm	L1500×W600×H300mm
Customer product	L600*W400*H100 mm	L600*W400*H100 mm
Packing speed	20~30 pcs/min	20~50Pcs/min
Net weight	550kg	650kg
Power	3KW	16KW
Power supply	220V/380V 50Hz/60Hz 3 Phase	220V/380V 50Hz/60Hz 3 Phase
Air pressure	5.5kg/cm ³	/
Table height	850+30mm	850+30mm
Max current	16.5A	30A
Direction	Right to left	Right to left
Material	Pof film	Pof film

Configuration List

Name	Brand
GPS-7040	
Temperature Control	Japan Omron
Motor	Taiwan motor
Frequency Changer	Inovance
Contactor	France Schneider
Middle relay	Japan IDEC
GPL-5560CI	
PLC	SIEMENS
Touch panel	MCGS
Sensor	German SICK
Intermediate Relay	Japan OMRON
Temperature Controller	OMRON
AC Contactor	Schneider
Pneumatic Parts	Taiwan Sharko
Sensor	BANNER

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

