



ER

SR

FSR

CSR


Machine Introduction

Hopper Receivers are fitted with sensors to control materials suction smoothly. Diverse Hopper Receivers-standard type, stainless type and for optics type are provided according to customers' various requirements. Stainless hopper receivers ensure no contamination to raw materials and they are equipped with see-through window to monitor materials levels which are especially suitable for application of optics. They can be mounted onto plastic injection molding machines directly or to work with separated autoloaders and give more convenient on cleaning or changing materials.

Features:

1. Stainless steel construction used by ER/FSR series for ensuring material free and for all structural by SR/CSR series from contamination that working with detachable autoloaders;
2. Mechanical stainless flap fitting on ER/SR/CSR series that need not to be adjusted according to different material;
3. With hopper receivers and bases are locked by hinge, FSR/SR/CSR series is easy for dismantle;
4. A diaphragm valve fitting on CSR series if several central hopper receivers want to share same blower for centralized feeding system;
5. FSR series is particularly designed for optic product use for reducing powder to cause any defects for enhancing productivity qualities.
6. Autoloader equip with photo sensors which are mounted onto the feeding port of injection molding machines; autoloader equip with proximity switch which are mounted onto the hopper dryers.
7. To adopt glass tube with photo sensor (static capacity detection) for precisely detect material conveying.
8. To be fitted with stainless screener for easy filtering dust.

Product Structure Diagram

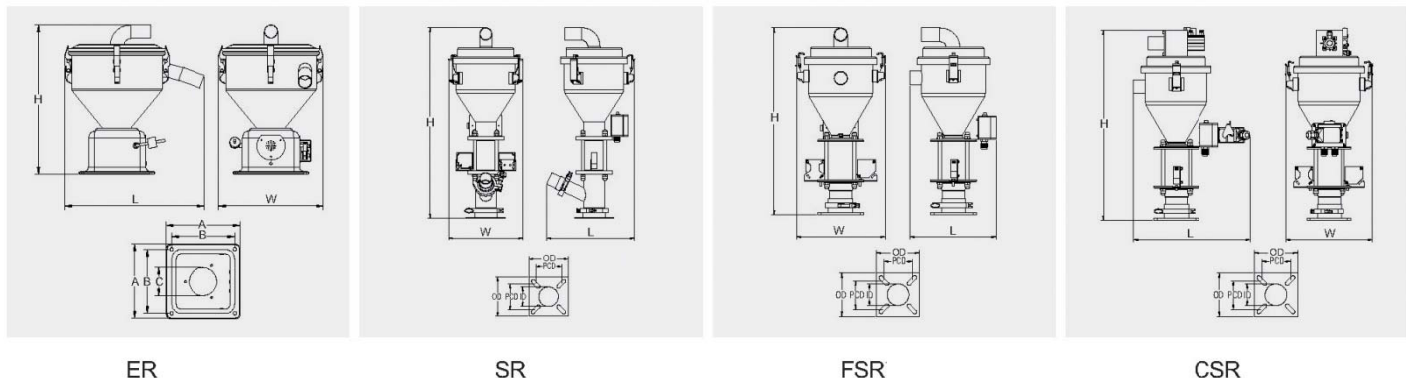

ER

SR

FSR

CSR

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA

Technical Specification

イニコ Model		ER-6E	ER-6
ホッパ容量 Hopper Capacity	L	6	6
バネ Conveying Capacity	kg/h	140	140
センサー Sensor Type		フォト Photoelectric	近接 Proximate
制御電圧 Control Voltage	V	DV24V	
ホース径 Conveying Hose Size	mm	38.1 (1.5")	
フィルタ Filter Type		イミタ Filter Netting	
総消費電力 Total Power	W	10	
外形寸法 Dimensions	L(mm)	388	388
	W(mm)	291	291
	H(mm)	600	568
ホース径 Size	OD(mm)	/	210
	ID(mm)	/	180
	PCD(mm)	/	81
標準付属品 Standard Accessories		ホースSuction Tube+PPCホースHose	
重量 Weight	kg	6	7

イニコ Model		FSR-3E
ホッパ容量 Hopper Capacity	L	3
バネ Conveying Capacity	kg/h	70
センサー Sensor Type		フォト Photoelectric
制御電圧 Control Voltage	V	DV24V
ホース径 Conveying Hose Size	mm	38.1 (1.5")
フィルタ Filter Type		イミタ Filter Netting
総消費電力 Total Power	W	10
外形寸法 Dimensions	L(mm)	266
	W(mm)	241
	H(mm)	550
ホース径 Size	OD(mm)	120
	ID(mm)	60
	PCD(mm)	78
標準付属品 Standard Accessories		ホースSuction Tube+PPCホースHose
重量 Weight	kg	10

SR-3E	SR-6E	SR-12E	SR-3	SR-6	SR-12	SR-18	SR-24
3	6	12	3	6	12	18	24
70	140	200	70	140	200	260	320
フォト Photoelectric			近接 Proximate				
DC24V							
38.1 (1.5")							
イミタ Filter Netting							
10			15				
225	315	315	276	315	315	315	315
255	275	275	255	275	275	275	275
530	615	670	385	470	625	780	835
120	120	120	220	220	220	220	220
60	60	60	180	180	180	180	180
78	78	78	200	200	200	200	200
ホース Suction Tube+PPCホースHose							
10	12	13.5	9.5	12	13.5	15	17.5

CSR-3E	CSR-6E	CSR-12E	CSR-3	CSR-6	CSR-12	CSR-18	CSR-24
3	6	12	3	6	12	18	24
70	140	200	70	140	200	260	320
フォト Photoelectric			近接 Proximate				
DC24V							
38.1 (1.5")							
イミタ Filter Netting							
15							
335	375	375	370	400	400	400	400
250	259	259	255	275	275	275	275
555	640	695	415	495	651	700	750
120	120	120	220	220	220	220	220
60	60	60	180	180	180	180	180
78	78	78	200	200	200	200	200
/							
11	13	14.5	10.5	13	14.5	16	18.5

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA