



Madar Yara Co.
For Lab Equipments



Thermomac


Oven - Drying Oven

FDO Series





- 01 .The special air pressure heat radiation structure ensures that the low-noise fan temperature remains below 50 °C. The turbine centrifugal fan ensures that the fan can be used for a longer period of time.
- 02 .The stainless steel inner chamber and semi-circular springs at the corners make cleaning easy. The space between the racks is adjustable. The heating air passage on both sides and the heating cover at the bottom can be quickly installed and removed.
- 03 .Vertical double-channel coating and centrifugal air force turbine that keeps the air and temperature constant.
- 04 .PID microcomputer smart temperature controller with fixed temperature operation, high temperature alarm, automatic shutdown, dual display, precise temperature control, operation timing (0-9999 minutes), and easy-to-read functions.
- 05 .Discover the new design that coordinates the lower air fan and heater well and provides high temperature accuracy by adopting vertical double air passage circulation.
- 06 .In the event of data loss due to a power failure, the device has a parameter memory protection function to recover data after the device is turned on
- 07 .When the temperature reaches the set value, the fan can be turned off to prevent dust or other small samples from moving the inner chamber.
- 08 .Large, hollow tempered glass observation window, adjustable airtight buckle lock and silicone rubber gasket for high-quality heat insulation
- 09 .New vertical type, cold rolling and electrostatic external spraying of steel

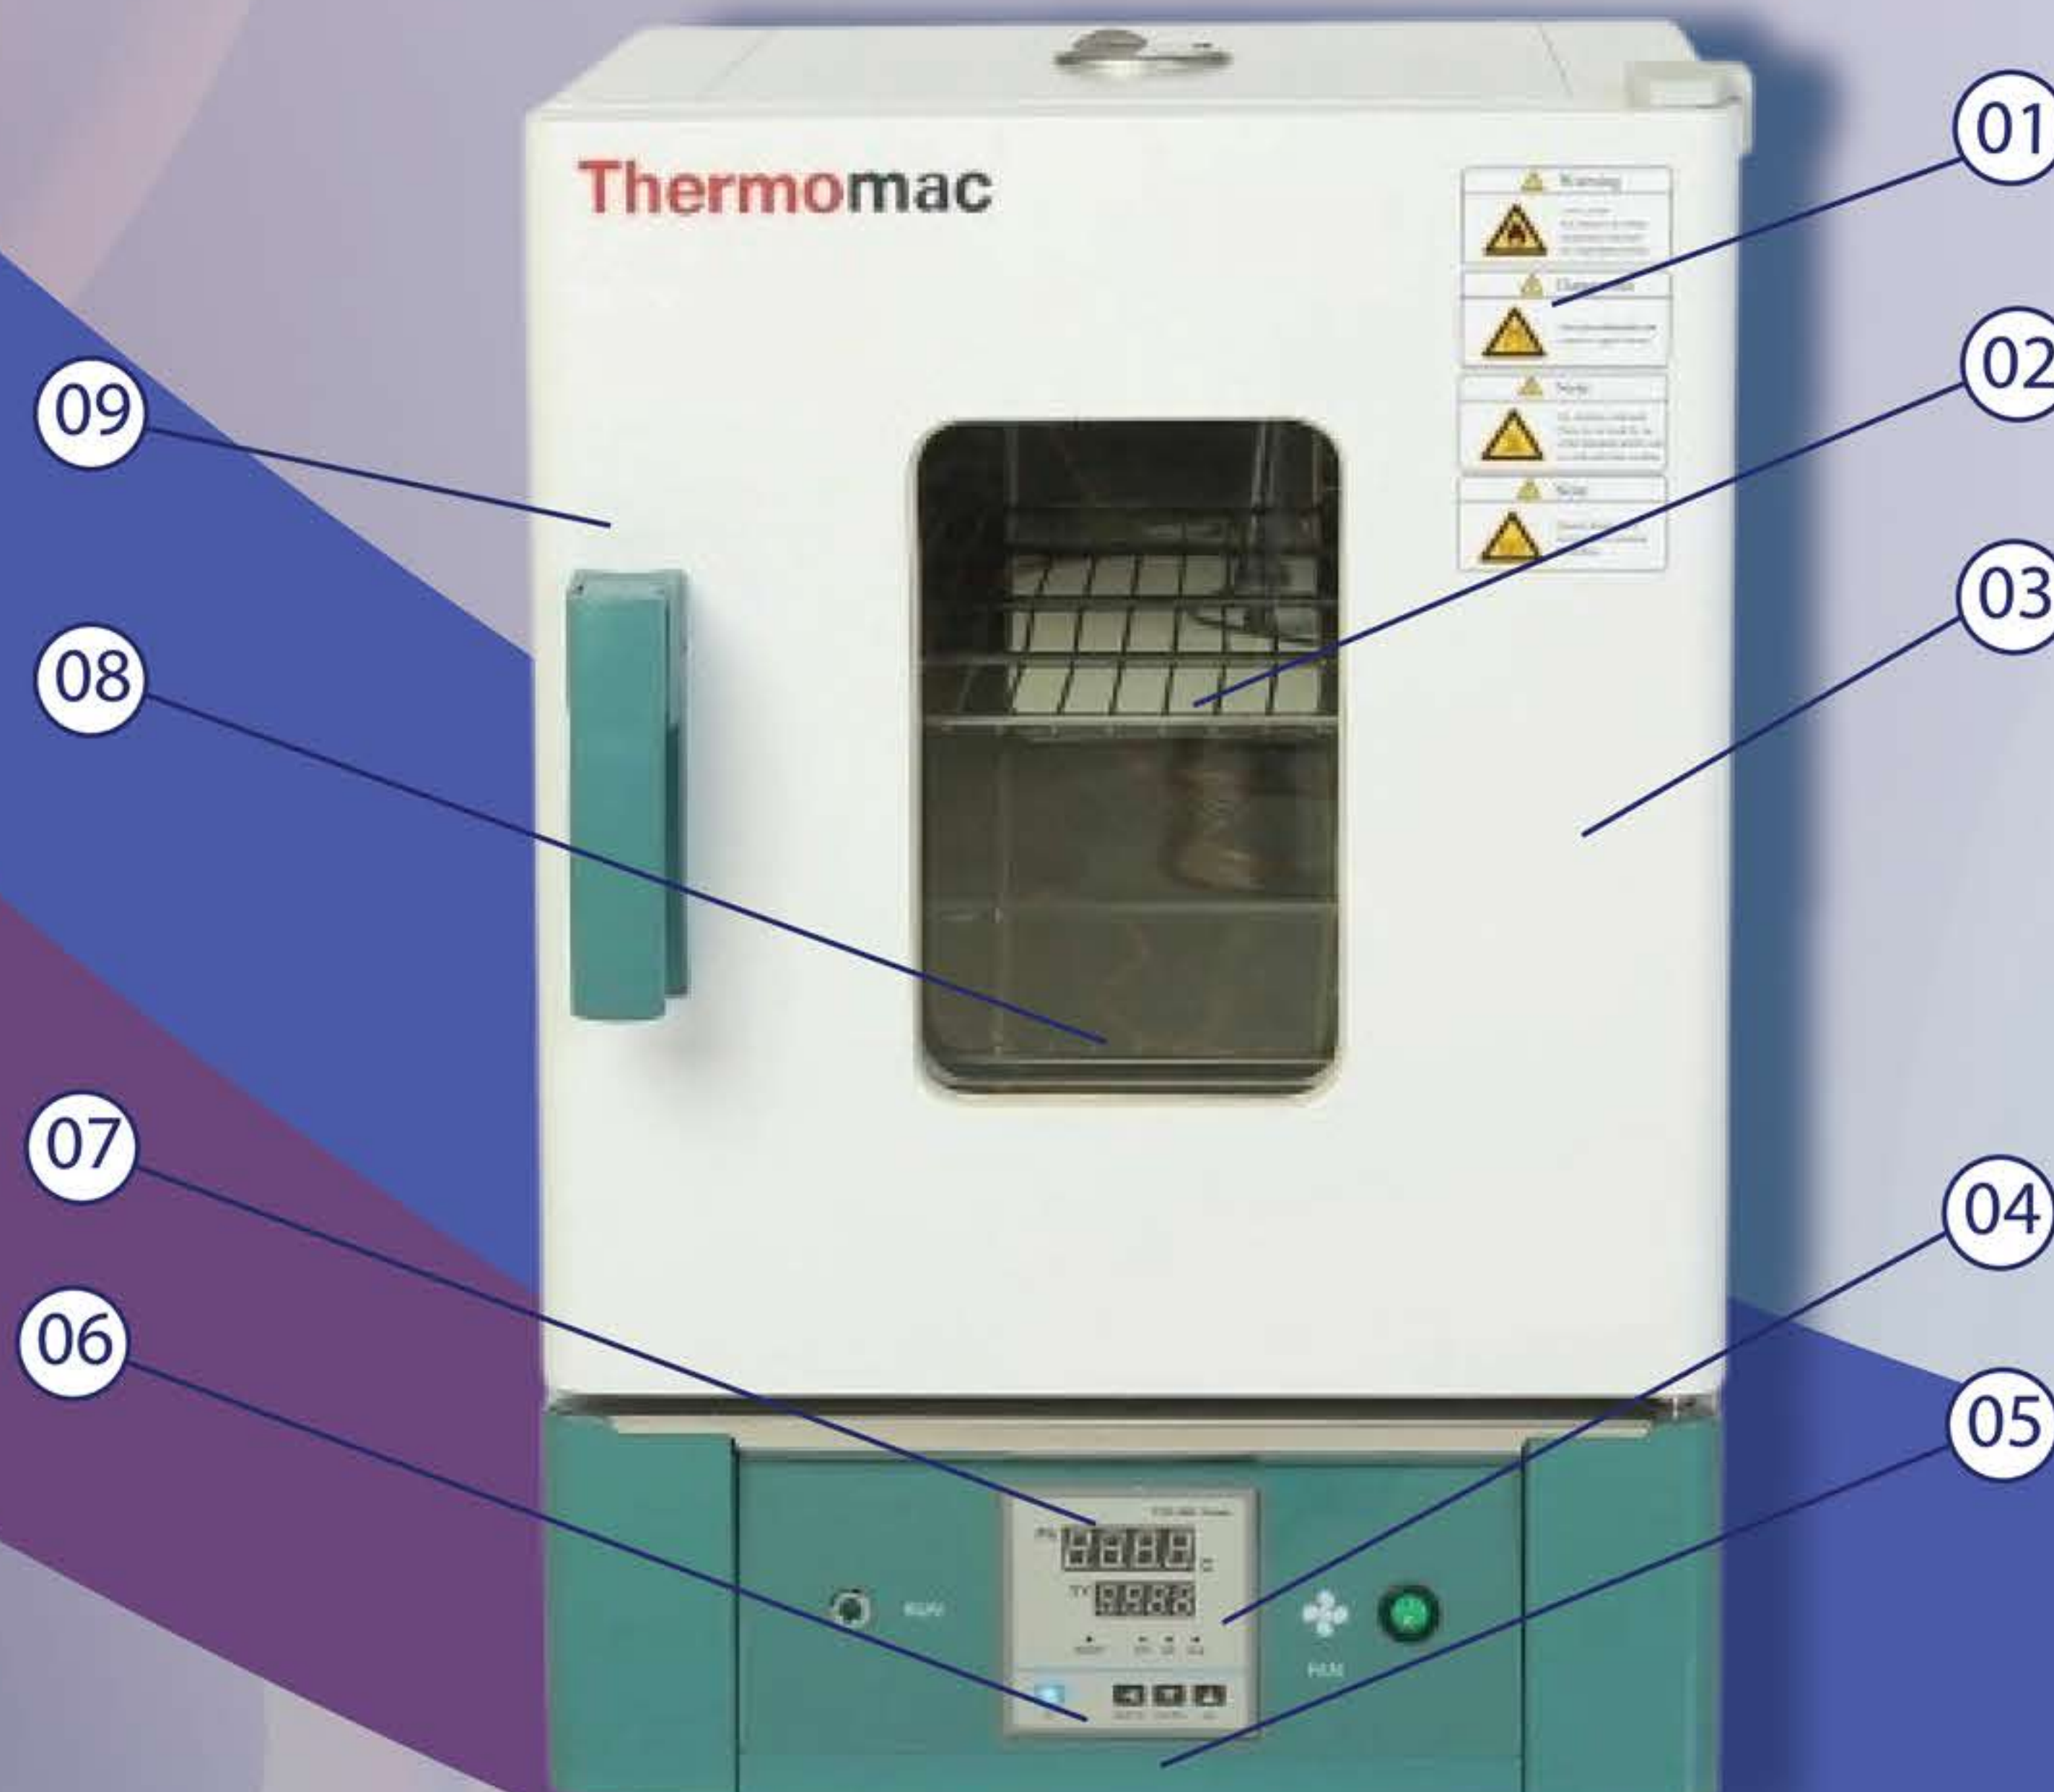



Madar Yara Co.
For Lab Equipments



Model	FDO30	FDO45	FDO65	FDO125	FDO230
Capacity	30 Litre	45 Litre	65 Litre	125 Litre	230 Litre
Voltage	220V/50-60Hz				
Temperature Range	RT +10~300OC				
Temperature Variation	±1.0OC				
Temperature Resolution Ratio	0.1OC				
Ambient Temperature	5-40OC				
Heater Power (kW)	0.8	1	1.5	2.5	3
Internal Fan Dimensions (WxHxH)	310x310x310	350x350x350	400x360x450	500x450x550	600x500x750
External Dimensions (WxHxH)	450x490x685	490x530x730	540x540x830	640x630x930	730x660x1220
Packaging Dimensions (WxHxH)	550x570x780	630x600x820	650x640x920	750x730x1020	900x760x1365
Load per Shelf	15kg for 2 standard configurations				
Net Weight (kg)	33	34	44	60	94
Timing Interval	0-9999 min				



+963 998686907



sales@madaryara.com



Syria - Damascus