
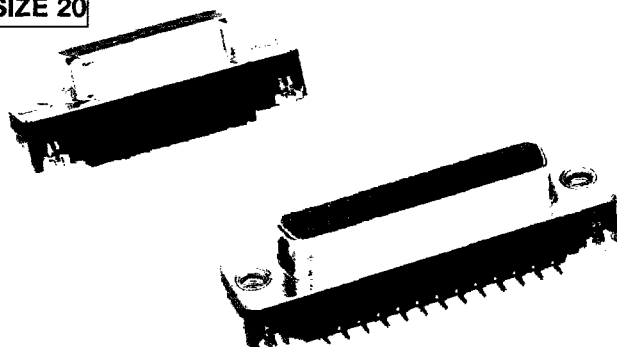


CONTACT SIZE 20

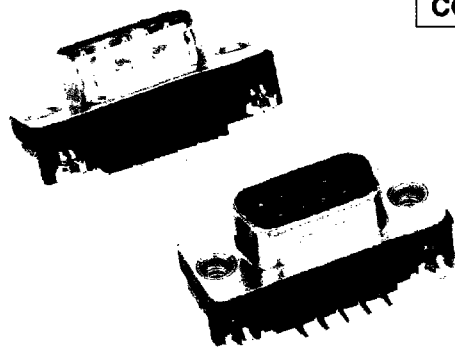

PLUG

RECEPTACLE

FEATURES

- * WIDELY USED IN NOTEBOOK PC
- * HIGH RELIABILITY
- * HIGH DURABILITY
- * INTEGRATED THERMOPLASTIC INSULATOR
- * GOLD PLATING CONTACT

MATERIALS/FINISHES

INSULATOR

THERMOPLASTIC (UL 94V-0, MOLDED BLACK)

CONTACT

COPPER ALLOY

CONTACT AREA

GOLD OVER Ni (50u" MIN.)

SOLDER AREA

TIN/LEAD (100u" MIN.) OVER Ni (50u" MIN.)

SHELL

STEEL

Ni PLATING

SPECIFICATION

ELECTRICAL CHARACTERISTICS :

- * LOW LEVEL CONTACT RESISTANCE : 15 mΩ MAX.
- * DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC MIN.
- * INSULATION RESISTANCE : 5000 MΩ MIN.
- * CONTACT CURRENT RATING : 3 Ampere

MECHANICAL CHARACTERISTICS :

- * CONTACT ENGAGEMENT FORCE 12 oz. MAX.
- * CONTACT SEPRATION FORCE : 0.75 oz. MIN.
- * CONTACT RETENTION FORCE : 4 lbs MIN.
- * OPERATING TEMPERATURE : -55°C TO +105°C

ORDER INFORMATION

DZ N N N X N — XN

D-SUB DIP
SERIES

TERMINATOR TYPE

1 = RIGHT ANGLE

CONTACT DESIGN TYPE

0 = MALE

1 = FEMALE

NO. OF CONTACT POSITION

CONTACT SIZE 20

1 = 9 PIN

2 = 15 PIN

3 = 25 PIN

MODIFICATION CODE

B2 = STANDARD PROFILE, 2.54 mm

R-T-R, LOW-TEMP HOUSING

CONTACT PLATING


1 = GOLD FLASH

3 = 30 u" GOLD PLATING

R/A BODY LENGTH


A = 5.0 mm

[0.197] inch

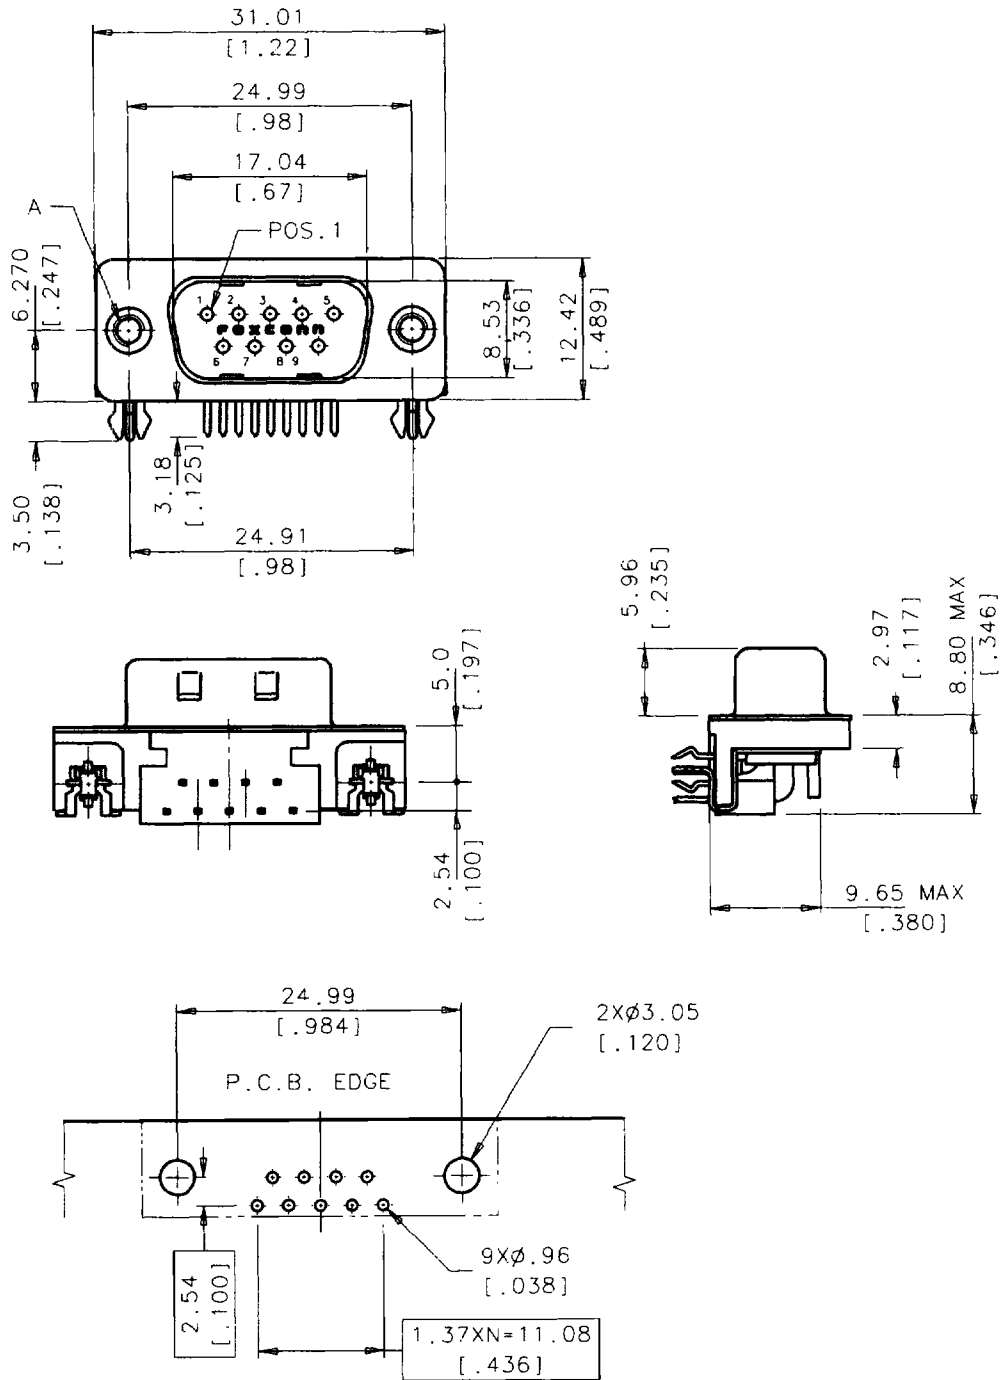

RECOMMENDED P.C.B. LAYOUT
(TOP VIEW)

DZ101A□-Z0	M2.6
DZ101A□-B2	4-40 UNC
PROD. NO.	A

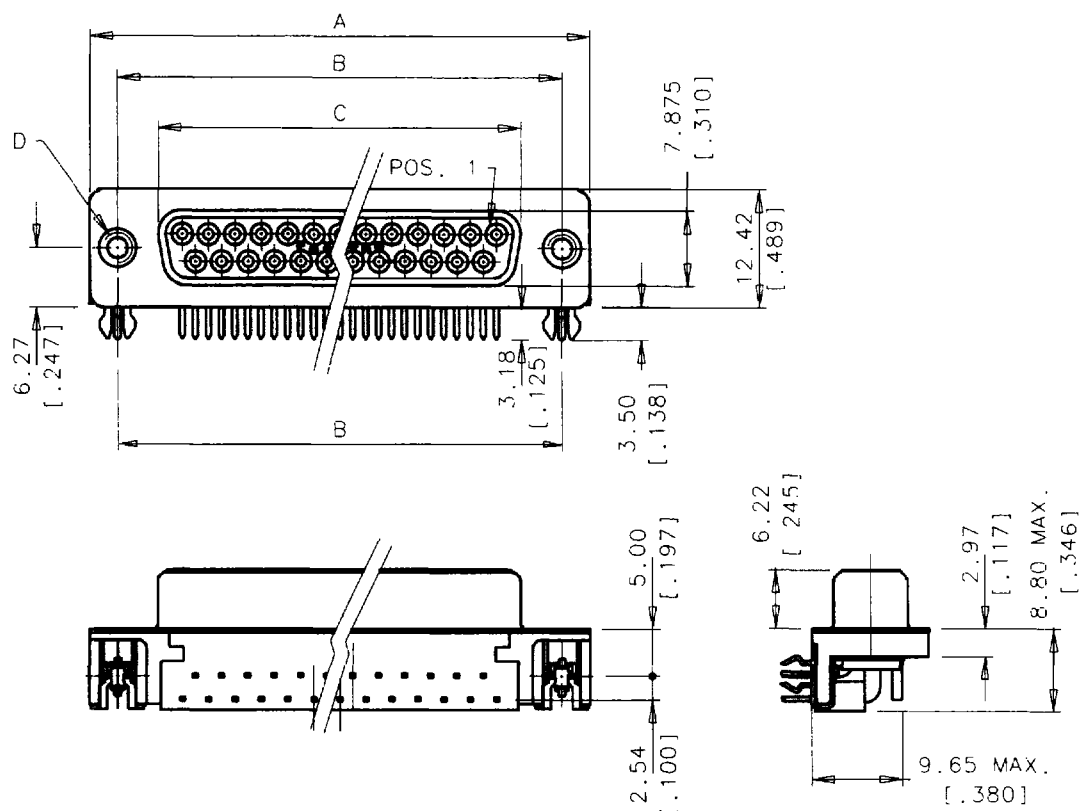

RECOMMENDED P.C.B. LAYOUT
(TOP VIEW)

DZ113A□-Z0	25	53.04 [2.088]	47.04 [1.852]	38.36 [1.510]	M2.6
DZ112A□-Z0	15	39.01 [1.536]	33.32 [1.312]	24.64 [.970]	M2.6
DZ113A□-B2	25	53.04 [2.088]	47.04 [1.852]	38.36 [1.510]	4-40 UNC
DZ112A□-B2	15	39.01 [1.536]	33.32 [1.312]	24.64 [.970]	4-40 UNC
PROD. NO.	NO. OF POS.	A	B	C	D