



LOW PROFILE RIGHT ANGLE



LOW PROFILE WITH SCREW



MIDDLE PROFILE RIGHT ANGLE



MIDDLE PROFILE WITH SCREW

## MATERIALS/FINISHES

### INSULATOR

THERMOPLASTIC ( UL94V-0 )

### CONTACT

COPPER ALLOY

CONTACT AREA:

GOLD OVER Sn/Pb ( 100 200u" ) AT TAIL,  
OVER Ni 50u" OVERALL

### SHELL

STEEL

Ni PLATED

## SPECIFICATION


### ELECTRICAL CHARACTERISTICS :


- \* LOW LEVEL CONTACT RESISTANCE : 25 mΩ MAX.
- \* DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC MIN.
- \* INSULATION RESISTANCE : 5000 MΩ MIN.
- \* CONTACT CURRENT RATING : 2 Ampere

### MECHANICAL CHARACTERISTICS :

- \* CONTACT INSERTION FORCE : 0.34 Kgf MAX.
- \* CONTACT SEPARATION FORCE : 0.021 Kgf MIN.
- \* DURABILITY : 500 MATING CYCLES
- \* OPERATING TEMPERATURE : -55°C TO +105°C


## ORDER INFORMATION

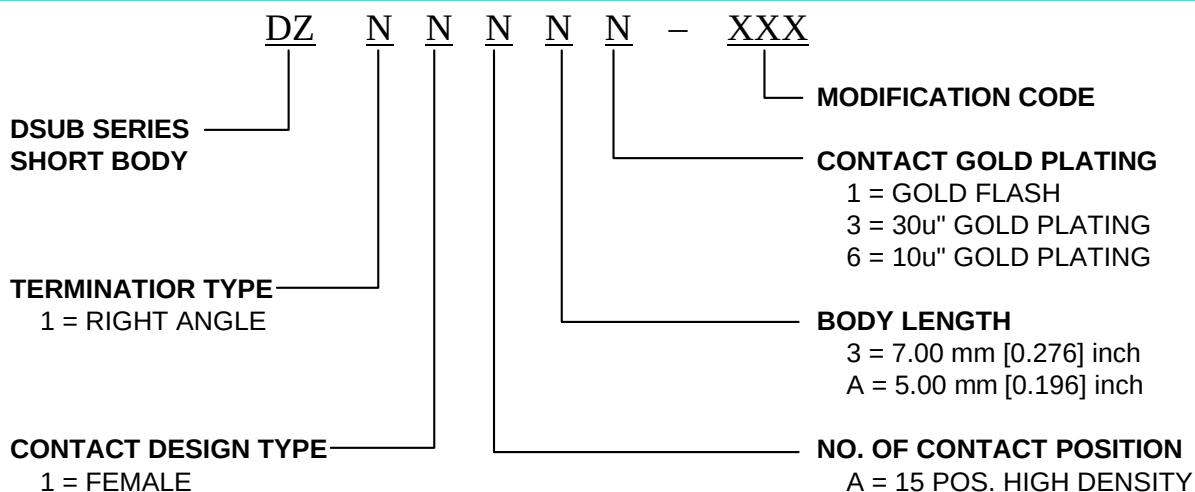

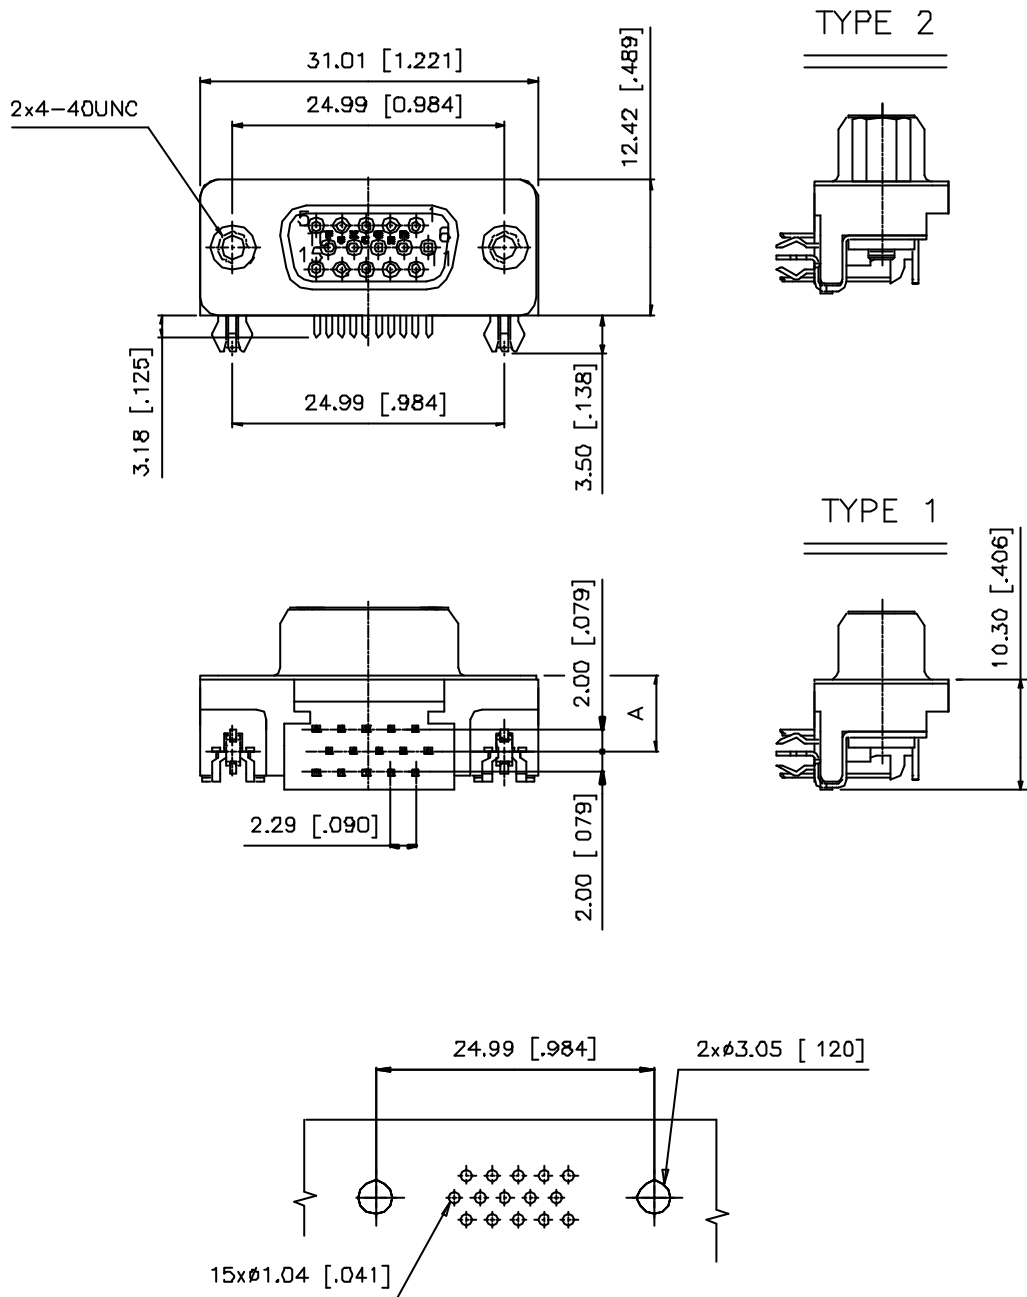


**RECOMMENDED P.C.B LAYOUT**  
**(TOP VIEW)**

|                   |                    |                     |             |
|-------------------|--------------------|---------------------|-------------|
| <b>DZ11A3*-R5</b> | <b>15 POS.</b>     | <b>7.00 [0.276]</b> | <b>2</b>    |
| <b>DZ11A3*-R3</b> | <b>15 POS.</b>     | <b>7.00 [0.276]</b> | <b>1</b>    |
| <b>DZ11AA*-B2</b> | <b>15 POS.</b>     | <b>5.00 [0.198]</b> | <b>1</b>    |
| <b>PROD. NO.</b>  | <b>NO. OF POS.</b> | <b>A</b>            | <b>TYPE</b> |

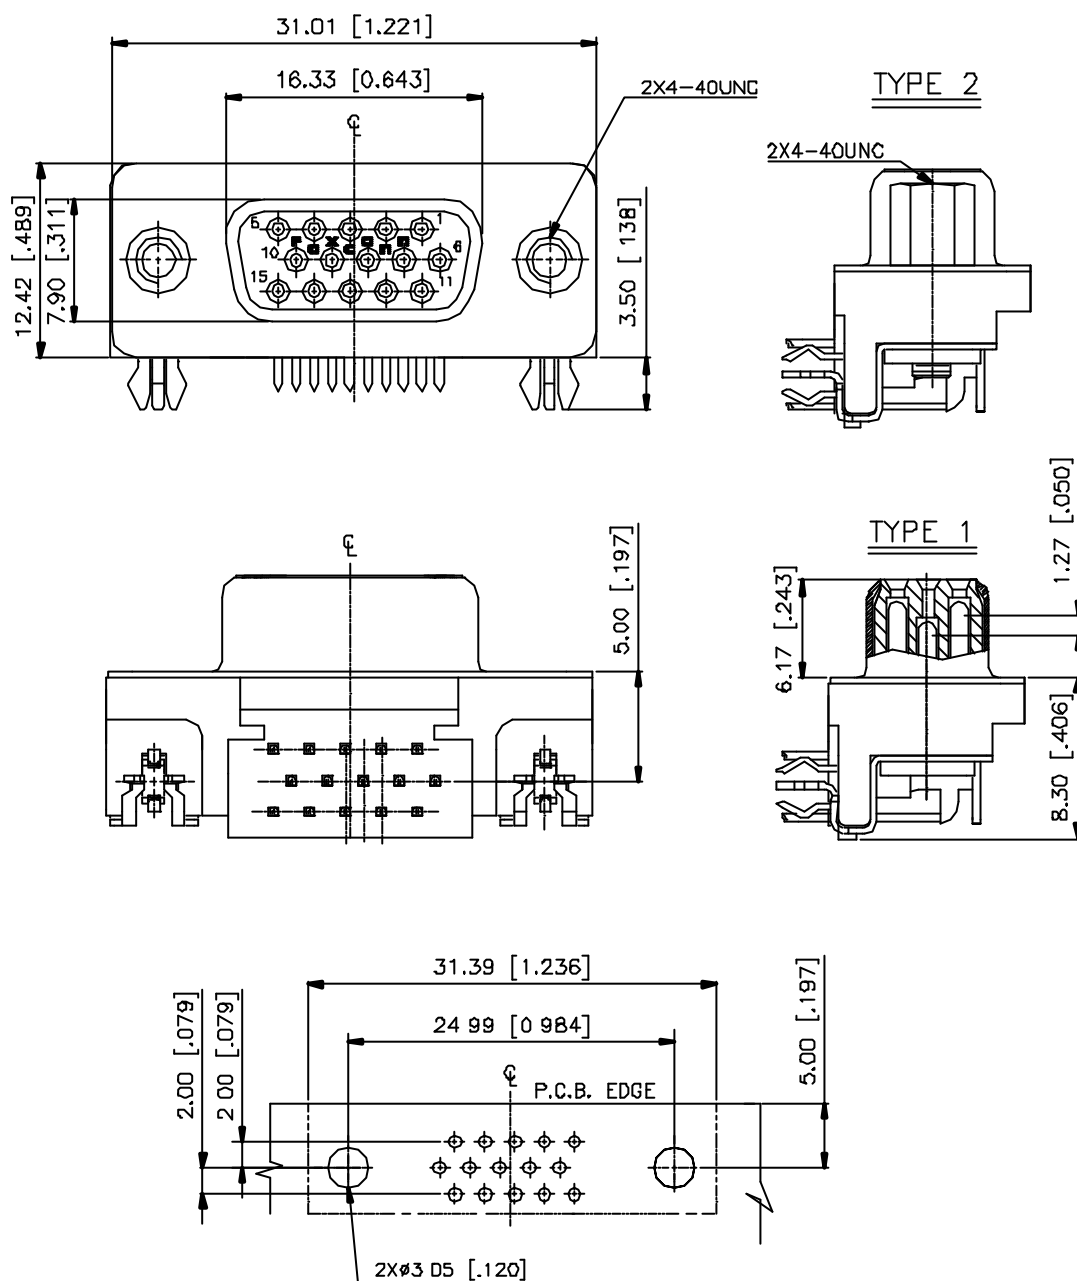

**RECOMMENDED P.C.B LAYOUT**  
**(TOP VIEW)**

|                   |                    |             |
|-------------------|--------------------|-------------|
| <b>DZ11AA*-F9</b> | <b>BLUE (661C)</b> | <b>2</b>    |
| <b>DZ11AA*-F8</b> |                    | <b>1</b>    |
| <b>DZ11AA*-B9</b> | <b>BLUE (285C)</b> | <b>2</b>    |
| <b>DZ11AA*-B8</b> |                    | <b>1</b>    |
| <b>PROD. NO.</b>  | <b>COLOR</b>       | <b>TYPE</b> |

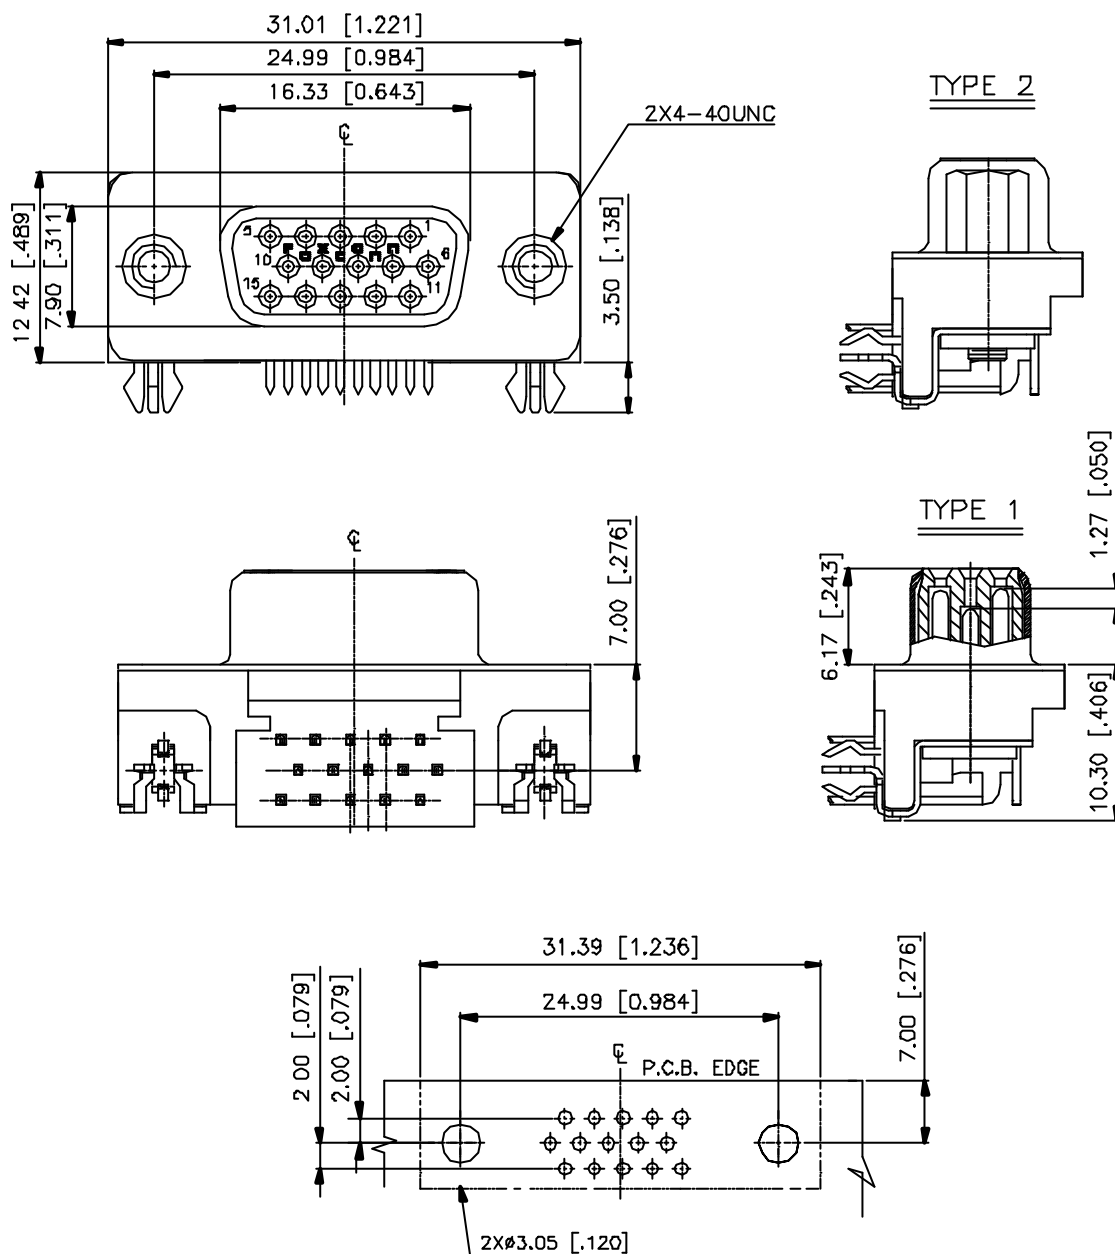

|                   |                    |             |
|-------------------|--------------------|-------------|
| <b>DZ11A3*-P9</b> | <b>BLUE (661C)</b> | <b>2</b>    |
| <b>DZ11A3*-P8</b> |                    | <b>1</b>    |
| <b>DZ11A3*-B9</b> | <b>BLUE (285C)</b> | <b>2</b>    |
| <b>DZ11A3*-B8</b> |                    | <b>1</b>    |
| <b>PROD. NO.</b>  | <b>COLOR</b>       | <b>TYPE</b> |