


RF Coaxial Connector (SMT), TC-2 Series <3GHz>



■ Connection Diagram

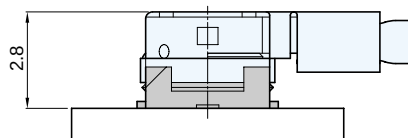

■ Features

1. This is a coaxial connector of SMT.
2. Super compact and low profile, and the coupling height of the socket and the plug is 2.8mm only.
3. Various teflon coated coaxial cables are prepared (outside diameter : 1.25mm).
4. Both the central and external conductors are connected by crimping.

■ Specifications


1. Rated Voltage : AC 250V r.m.s.
2. Operating Frequency Range : DC to 3GHz
3. Characteristic Impedance : 50Ω
4. V.S.W.R. : 1.2max.
5. Operating Temperature Range : -40°C to $+90^{\circ}\text{C}$

■ Material and Plating

- Housing / Insulator : Thermoplastic Resin
- Terminal : Copper Alloy, Gold Plating, Silver Plating, etc.


● Receptacle

CRS 5001-0201

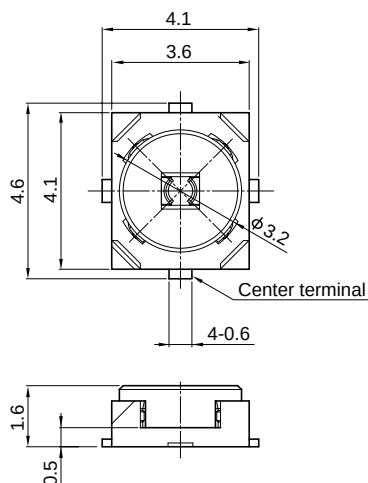

● Plug

CRC 9001-0401

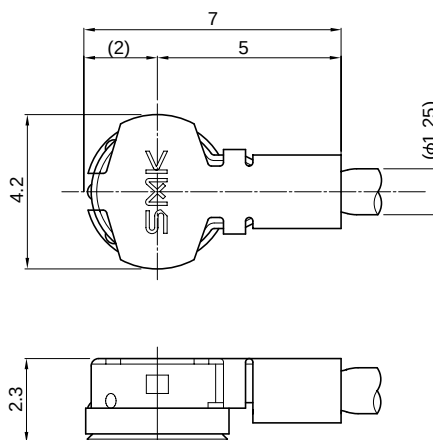

■ Note

The specifications of harness shall be decided by another discussion.

