

Power Inductors


■ 7208L/M



Frequency Range: ~1MHz
Inductance Range: 10~1000μH
Temperature Coefficient: 800±400ppm/°C



Fixed

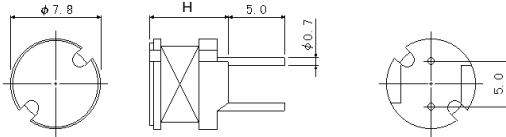

H = 4.5: 7208L

H = 7.0: 7208M


■ 7208N



Frequency Range: ~1MHz
Inductance Range: 10~1000μH
Temperature Coefficient: 800±400ppm/°C




Fixed

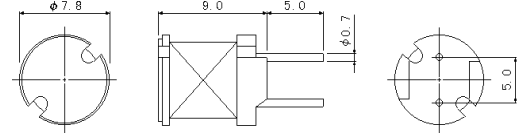


Features

- 7.8mm dia. small magnetically unshielded type inductor.
- Usable as power supply choke coil.
- Two height types, namely 7.0mm and 9.0mm are available.
- Core can be externally insulated with resin shrink tube.

Characteristics of DC Resistance

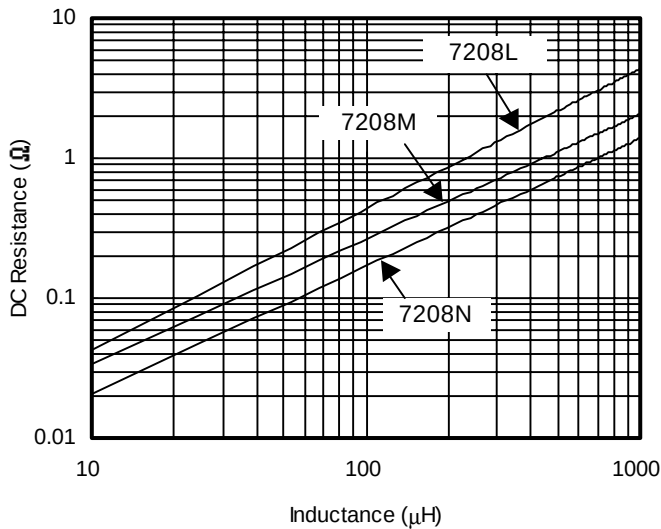

Characteristics of DC Superposition

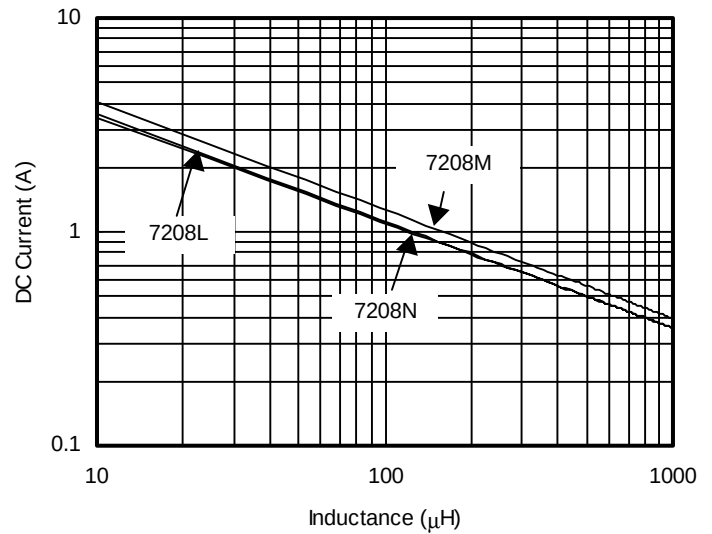

- Notes: 1. Graphs are based on typical values of each type, not spec. values.
2. DC current value is being measured at 10% decrease of inductance.

Power Inductors

Coil Selection Guide

Inductance		DC Resistance (Ω) max. - typical						Rated DC Current (mA)			Allowable DC Current (mA)		
Code	(μ H)	7208L		7208M		7208N		7208L	7208M	7208N	7208L	7208M	7208N
100	10	0.063	0.047	0.036	0.030	0.036	0.027	2200	3000	2500	2400	1700	2400
120	12	0.067	0.051	0.043	0.035	0.040	0.029	2000	2500	2100	2200	1650	2200
150	15	0.087	0.065	0.049	0.039	0.050	0.033	1900	2400	1900	2050	1500	2050
180	18	0.10	0.075	0.053	0.440	0.053	0.039	1800	2200	1800	1950	1400	1950
220	22	0.14	0.105	0.063	0.051	0.063	0.045	1600	1900	1600	1850	1200	1850
270	27	0.16	0.115	0.080	0.063	0.072	0.051	1400	1800	1400	1600	1100	1600
330	33	0.18	0.135	0.10	0.083	0.076	0.056	1300	1600	1300	1400	1050	1400
390	39	0.22	0.158	0.12	0.093	0.087	0.063	1200	1400	1200	1350	950	1350
470	47	0.27	0.203	0.14	0.105	0.10	0.072	1100	1300	1100	1250	850	1250
560	56	0.31	0.230	0.16	0.120	0.12	0.086	1000	1200	1000	1150	800	1150
680	68	0.42	0.309	0.21	0.169	0.14	0.101	950	1100	920	1000	690	1000
820	82	0.47	0.325	0.25	0.187	0.18	0.134	900	1000	850	950	640	950
101	100	0.55	0.411	0.34	0.259	0.21	0.154	850	920	760	820	600	820
121	120	0.68	0.511	0.38	0.291	0.25	0.177	750	880	700	760	530	760
151	150	0.81	0.607	0.44	0.334	0.28	0.206	680	770	650	720	490	720
181	180	1.20	0.825	0.51	0.387	0.37	0.268	550	690	600	690	430	690
221	220	1.30	0.944	0.70	0.535	0.46	0.330	520	650	520	580	390	580
271	270	1.50	1.100	0.80	0.624	0.62	0.453	480	570	470	540	360	540
331	330	2.00	1.500	1.10	0.827	0.71	0.521	430	510	430	470	310	470
391	390	2.30	1.690	1.20	0.927	0.81	0.588	400	460	380	440	290	440
471	470	3.00	2.230	1.40	1.050	1.10	0.785	370	420	350	410	260	410
561	560	3.40	2.530	1.80	1.351	1.20	0.873	320	400	320	350	240	350
681	680	3.90	2.880	2.10	1.559	1.40	0.993	300	350	300	320	220	320
821	820	4.50	3.370	2.70	2.040	1.90	1.377	280	330	280	290	200	290
102	1000	6.30	4.690	3.00	2.335	2.10	1.552	250	300	250	270	170	270

- Notes: 1. Inductance is measured by LCR Meter at 1kHz.
 2. Rated DC current: Value of inductance decrease within 10%.
 3. DC Current: Value of Temperature increase shown above.

Parts Code

7208L	—	101	K
-------	---	-----	---

Type Inductance Code Tolerance

Inductance range

Tolerance	7208L	7208M	7208N
±15%(L)	6.8~10μH	10μH	
±10%(K)	12~1000μH		

Temperature rise

7208L	7208M	7208N
+35°Cmax.		