


Power Inductors for Surface Mounting

■7B06L




Frequency Range:~1MHz
Inductance Range:10~1000 μ H
Temperature Coefficient:±10%max.

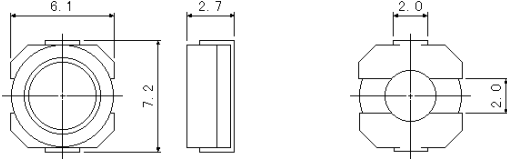

■7B06N




Frequency Range:~1MHz
Inductance Range:10~1000 μ H
Temperature Coefficient:±10%max.

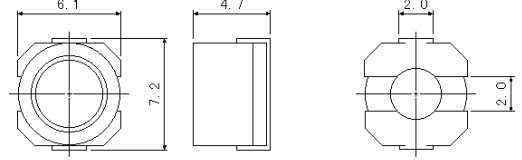

■7B07N




Frequency Range:~1MHz
Inductance Range:10~330 μ H
Temperature Coefficient:±10%max.

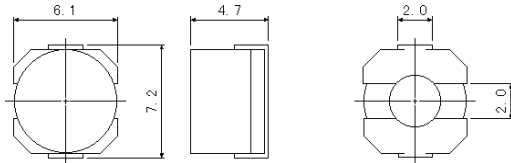

■7C06N




Frequency Range:~1MHz
Inductance Range:10~1000 μ H
Temperature Coefficient:±10%max.

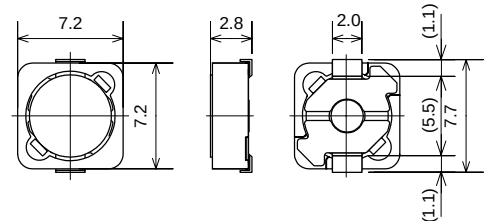


Features

- SMD magnetically unshielded type of power inductor.
- Suitable as power supply choke coil.

Characteristics of DC Resistance

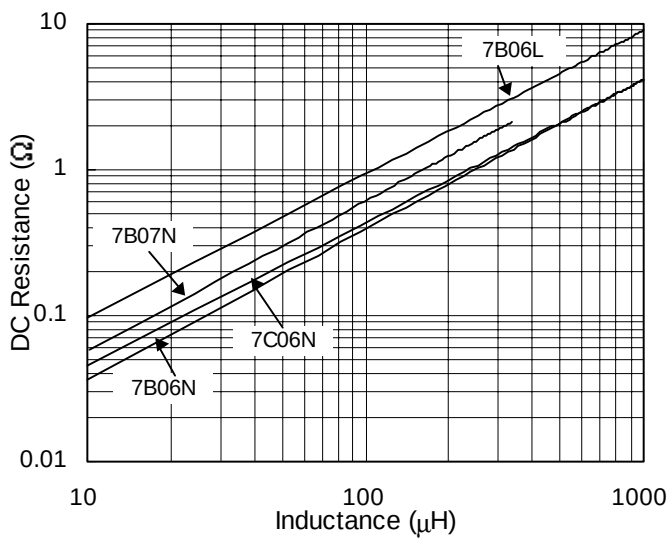

Characteristics of DC Superposition

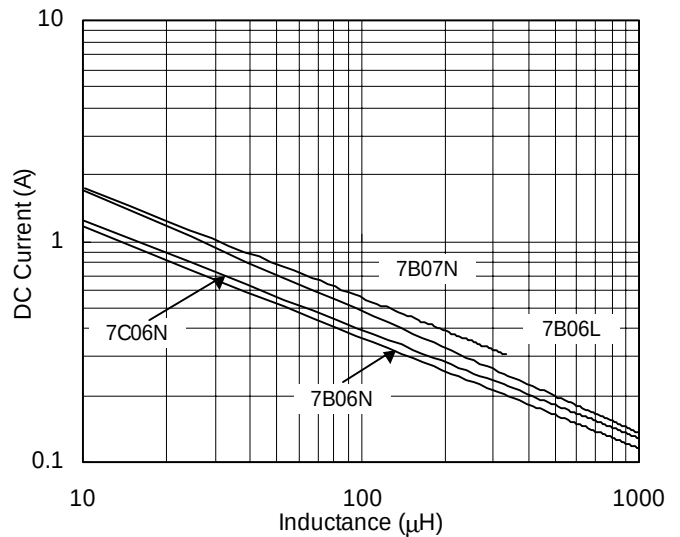

Notes: 1. Graphs are based on typical values of each type, not spec. values.
2. DC current value is being measured at 10% decrease of inductance.

Power Inductors for Surface Mounting

Coil Selection Guide

Inductance		DC Resistance (Ω) max. - typical								Rated DC Current (mA)				Allowable DC Current (mA)			
Code	(μ H)	7B06L		7B06N		7C06N		7B07N		7B06L	7B06N	7C06N	7B07N	7B06L	7B06N	7C06N	7B07N
100	10	0.12	0.086	0.051	0.034	0.06	0.041	0.080	0.058	1000	800	900	1350	1200	1600	1300	1500
120	12	0.17	0.124	0.056	0.042	0.07	0.047	0.090	0.067	930	750	800	1250	1000	1400	1200	1400
150	15	0.18	0.132	0.080	0.060	0.10	0.070	0.11	0.085	870	660	700	1000	900	1200	1100	1200
180	18	0.26	0.191	0.09	0.067	0.11	0.082	0.13	0.101	780	590	640	950	750	1100	1000	1150
220	22	0.30	0.219	0.13	0.096	0.15	0.105	0.17	0.131	710	540	600	900	700	920	880	1000
270	27	0.41	0.303	0.15	0.107	0.17	0.124	0.20	0.153	650	490	550	750	600	850	840	900
330	33	0.45	0.332	0.20	0.150	0.24	0.175	0.26	0.200	600	440	480	700	560	750	710	800
390	39	0.51	0.381	0.22	0.159	0.27	0.194	0.30	0.230	540	420	440	650	530	720	670	750
470	47	0.57	0.427	0.24	0.178	0.28	0.210	0.39	0.290	480	380	410	600	490	680	630	700
560	56	0.63	0.471	0.27	0.200	0.31	0.227	0.44	0.330	440	340	380	550	460	650	600	650
680	68	0.95	0.712	0.36	0.267	0.34	0.525	0.56	0.418	410	280	340	500	380	560	570	550
820	82	1.10	0.806	0.42	0.310	0.39	0.293	0.67	0.505	370	260	300	450	360	520	520	520
101	100	1.30	0.890	0.57	0.426	0.54	0.394	0.76	0.572	330	240	280	400	340	450	440	500
121	120	1.40	1.016	0.65	0.479	0.59	0.436	1.10	0.808	300	230	260	350	320	420	420	400
151	150	2.20	1.620	0.74	0.549	0.88	0.655	1.20	0.921	270	200	230	320	260	370	360	350
181	180	2.50	1.826	1.10	0.810	0.98	0.736	1.40	1.061	240	180	210	300	240	310	340	320
221	220	2.80	2.031	1.20	0.901	1.10	0.825	2.10	1.539	220	160	180	270	220	290	320	300
271	270	3.10	2.315	1.40	1.007	1.80	1.285	2.30	1.758	200	150	160	250	200	260	240	270
331	330	4.30	3.192	2.10	1.514	1.90	1.416	2.70	2.045	180	140	150	230	180	240	230	250
391	390	5.40	3.422	2.20	1.637	2.10	1.556			170	130	140		170	230	220	
471	470	5.40	3.989	2.50	1.859	2.40	1.746			150	120	120		150	210	210	
561	560	7.80	5.796	2.70	2.027	4.00	2.978			140	110	110		130	200	170	
681	680	8.50	6.322	4.40	3.267	4.20	3.149			130	100	100		120	170	160	
821	820	9.70	6.985	4.90	3.675	4.70	3.459			120	90	90		110	160	140	
102	1000	13.00	9.300	5.40	4.036	5.40	3.991			110	80	80		100	150	130	

- Notes: 1. Measurement Frequency for Inductance: 1kHz.
 2. Rated DC Current: Value of inductance decrease within 10%.
 3. Allowable DC Current: See Table below for Value of Temperature Rise.

Parts Code

7B06L — 101 M
 Type Inductance Code Tolerance

Inductance range

Tolerance	7B06L	7B06N	7C06N	7B07N
±20%(M)	10~1000 μ H			10~330 μ H

Temperature rise

7B06L	7B06N	7C06N	7B07N
+20°Cmax.			