Hardware Locality (hwloc) 2.5.0

Generated by Doxygen 1.9.1

1 Hardware Locality	1
1.1 Introduction	1
1.2 Installation	1
1.2.1 Basic Installation	1
1.2.2 Installing from a Git clone	2
1.3 Questions and Bugs	2
2 Hardware Locality (hwloc) Introduction	3
2.1 hwloc Summary	3
2.2 hwloc Installation	4
2.3 Command-line Examples	5
2.4 Programming Interface	7
2.4.1 Portability	7
2.4.2 API Example	8
2.5 History / Credits	10
2.6 Further Reading	10
3 Terms and Definitions	13
3.1 Objects	13
3.2 Indexes and Sets	13
3.3 Hierarchy, Tree and Levels	14
4 Command-Line Tools	17
4.1 Istopo and Istopo-no-graphics	17
4.2 hwloc-bind	17
4.3 hwloc-calc	17
4.4 hwloc-info	18
4.5 hwloc-distrib	18
4.6 hwloc-ps	18
4.7 hwloc-annotate	18
4.8 hwloc-diff, hwloc-patch and hwloc-compress-dir	18
4.9 hwloc-dump-hwdata	18
4.10 hwloc-gather-topology and hwloc-gather-cpuid	18
5 Environment Variables	19
6 CPU and Memory Binding Overview	23
7 I/O Devices	25
7.1 Enabling and requirements	25
7.2 I/O objects	25
7.3 OS devices	25
7.4 PCI devices and bridges	27
7.5 Consulting I/O devices and binding	27

7.6 Examples	27
8 Miscellaneous objects	31
8.1 Misc objects added by hwloc	. 31
8.2 Annotating topologies with Misc objects	. 31
9 Object attributes	33
9.1 Normal attributes	33
9.2 Custom string infos	33
9.2.1 Hardware Platform Information	33
9.2.2 Operating System Information	. 34
9.2.3 hwloc Information	. 34
9.2.4 CPU Information	. 34
9.2.5 OS Device Information	. 34
9.2.6 Other Object-specific Information	35
9.2.7 User-Given Information	36
10 Topology Attributes: Distances, Memory Attributes and CPU Kinds	37
10.1 Distances	37
10.2 Memory Attributes	38
10.3 CPU Kinds	38
11 Importing and exporting topologies from/to XML files	39
11.1 libxml2 and minimalistic XML backends	39
11.2 XML import error management	40
12 Synthetic topologies	41
12.1 Synthetic description string	41
12.2 Loading a synthetic topology	42
12.3 Exporting a topology as a synthetic string	42
13 Interoperability With Other Software	43
14 Thread Safety	45
15 Components and plugins	47
15.1 Components enabled by default	47
15.2 Selecting which components to use	47
15.3 Loading components from plugins	48
15.4 Existing components and plugins	48
16 Embedding hwloc in Other Software	51
16.1 Using hwloc's M4 Embedding Capabilities	. 51
16.2 Example Embedding hwloc	52
17 Frequently Asked Questions	55

-	17.1 Concepts	55
	17.1.1 I only need binding, why should I use hwloc?	55
	17.1.2 Should I use logical or physical/OS indexes? and how?	55
	17.1.3 hwloc is only a structural model, it ignores performance models, memory bandwidth, etc.? .	56
	17.1.4 hwloc only has a one-dimensional view of the architecture, it ignores distances?	56
	17.1.5 What are these Group objects in my topology?	56
	17.1.6 What happens if my topology is asymmetric?	57
	17.1.7 What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system?	57
	17.1.8 How may I ignore symmetric multithreading, hyper-threading, etc. in hwloc?	58
-	17.2 Advanced	58
	17.2.1 I do not want hwloc to rediscover my enormous machine topology every time I rerun a process	58
	17.2.2 How many topologies may I use in my program?	59
	17.2.3 How to avoid memory waste when manipulating multiple similar topologies?	59
	17.2.4 How do I annotate the topology with private notes?	59
-	17.3 Caveats	59
	17.3.1 Why is hwloc slow?	59
	17.3.2 Does hwloc require privileged access?	60
	17.3.3 What should I do when hwloc reports "operating system" warnings?	60
	17.3.4 Why does Valgrind complain about hwloc memory leaks?	61
-	17.4 Platform-specific	61
	17.4.1 How do I enable CUDA and select which CUDA version to use?	61
	17.4.2 How do I find the local MCDRAM NUMA node on Intel Xeon Phi processor?	61
	17.4.3 Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?	62
	17.4.4 How do I build hwloc for BlueGene/Q?	62
	17.4.5 How do I build hwloc for Windows?	62
	17.4.6 How to get useful topology information on NetBSD?	62
	17.4.7 Why does binding fail on AIX?	62
-	17.5 Compatibility between hwloc versions	63
	17.5.1 How do I handle API changes?	63
	17.5.2 What is the difference between API and library version numbers?	63
	17.5.3 How do I handle ABI breaks?	63
	17.5.4 Are XML topology files compatible between hwloc releases?	64
	17.5.5 Are synthetic strings compatible between hwloc releases?	64
	17.5.6 Is it possible to share a shared-memory topology between different hwloc releases?	64
18 L	Jpgrading to the hwloc 2.0 API	65
-	18.1 New Organization of NUMA nodes and Memory	65
	18.1.1 Memory children	65
	18.1.2 Examples	65
	18.1.3 NUMA level and depth	66
	18.1.4 Finding Local NUMA nodes and looking at Children and Parents	66
-	18.2 4 Kinds of Objects and Children	67

18.2.1 I/O and Misc children	67
18.2.2 Kinds of objects	67
18.3 HWLOC_OBJ_CACHE replaced	67
18.4 allowed_cpuset and allowed_nodeset only in the main topology	68
18.5 Object depths are now signed int	68
18.6 Memory attributes become NUMANode-specific	68
18.7 Topology configuration changes	68
18.8 XML changes	68
18.9 Distances API totally rewritten	69
18.10 Return values of functions	69
18.11 Misc API changes	69
18.12 API removals and deprecations	70
19 Network Locality (netloc)	71
19.1 Netloc Summary	71
19.1.1 Supported Networks	
19.2 Netloc Installation	71
19.3 Setup	72
19.4 Topology display	73
19.4.1 Generate the JSON file	73
19.4.2 Using netloc_draw	73
20 Netloc with Scotch	75
20.1 Introduction	_
20.2 Setup	
20.3 Tools and API	
20.3.1 Build Scotch architectures	75
20.3.2 Build Scotch sub-architectures	75
20.3.3 Mapping of processes	76
21 Module Index 21.1 Modules	77
21.1 Modules	77
22 Data Structure Index	79
22.1 Data Structures	79
23 Module Documentation	81
23.1 API version	81
23.1.1 Detailed Description	
23.1.2 Macro Definition Documentation	
23.1.2.1 HWLOC_API_VERSION	81
23.1.2.2 HWLOC_COMPONENT_ABI	
23.1.2.2 HWLOC_COMPONENT_ABI	81

23.2 Object Sets (hwloc_cpuset_t and hwloc_nodeset_t)	82
23.2.1 Detailed Description	82
23.2.2 Typedef Documentation	82
23.2.2.1 hwloc_const_cpuset_t	82
23.2.2.2 hwloc_const_nodeset_t	82
23.2.2.3 hwloc_cpuset_t	82
23.2.2.4 hwloc_nodeset_t	82
23.3 Object Types	82
23.3.1 Detailed Description	83
23.3.2 Macro Definition Documentation	83
23.3.2.1 HWLOC_TYPE_UNORDERED	83
23.3.3 Typedef Documentation	83
23.3.3.1 hwloc_obj_bridge_type_t	83
23.3.3.2 hwloc_obj_cache_type_t	83
23.3.3.3 hwloc_obj_osdev_type_t	84
23.3.4 Enumeration Type Documentation	84
23.3.4.1 hwloc_obj_bridge_type_e	84
23.3.4.2 hwloc_obj_cache_type_e	84
23.3.4.3 hwloc_obj_osdev_type_e	84
23.3.4.4 hwloc_obj_type_t	85
23.3.5 Function Documentation	86
23.3.5.1 hwloc_compare_types()	86
23.4 Object Structure and Attributes	87
23.4.1 Detailed Description	87
23.4.2 Typedef Documentation	87
23.4.2.1 hwloc_obj_t	87
23.5 Topology Creation and Destruction	87
23.5.1 Detailed Description	87
23.5.2 Typedef Documentation	87
23.5.2.1 hwloc_topology_t	87
23.5.3 Function Documentation	88
23.5.3.1 hwloc_topology_abi_check()	88
23.5.3.2 hwloc_topology_check()	88
23.5.3.3 hwloc_topology_destroy()	88
23.5.3.4 hwloc_topology_dup()	88
23.5.3.5 hwloc_topology_init()	89
23.5.3.6 hwloc_topology_load()	89
23.6 Object levels, depths and types	90
23.6.1 Detailed Description	90
23.6.2 Enumeration Type Documentation	90
23.6.2.1 hwloc_get_type_depth_e	90
23.6.3 Function Documentation	91

23.6.3.1 hwloc_get_depth_type()	 . 91
23.6.3.2 hwloc_get_memory_parents_depth()	 . 91
23.6.3.3 hwloc_get_nbobjs_by_depth()	 . 91
23.6.3.4 hwloc_get_nbobjs_by_type()	 . 91
23.6.3.5 hwloc_get_next_obj_by_depth()	 . 91
23.6.3.6 hwloc_get_next_obj_by_type()	 . 92
23.6.3.7 hwloc_get_obj_by_depth()	 . 92
23.6.3.8 hwloc_get_obj_by_type()	 . 92
23.6.3.9 hwloc_get_root_obj()	 . 92
23.6.3.10 hwloc_get_type_depth()	 . 92
23.6.3.11 hwloc_get_type_or_above_depth()	 . 93
23.6.3.12 hwloc_get_type_or_below_depth()	 . 93
23.6.3.13 hwloc_topology_get_depth()	 . 93
23.7 Converting between Object Types and Attributes, and Strings	 . 93
23.7.1 Detailed Description	 . 93
23.7.2 Function Documentation	 . 93
23.7.2.1 hwloc_obj_attr_snprintf()	 . 93
23.7.2.2 hwloc_obj_type_snprintf()	 . 94
23.7.2.3 hwloc_obj_type_string()	 . 94
23.7.2.4 hwloc_type_sscanf()	 . 94
23.7.2.5 hwloc_type_sscanf_as_depth()	 . 95
23.8 Consulting and Adding Key-Value Info Attributes	 . 95
23.8.1 Detailed Description	 . 95
23.8.2 Function Documentation	 . 95
23.8.2.1 hwloc_obj_add_info()	 . 95
23.8.2.2 hwloc_obj_get_info_by_name()	 . 96
23.9 CPU binding	 . 96
23.9.1 Detailed Description	 . 96
23.9.2 Enumeration Type Documentation	 . 97
23.9.2.1 hwloc_cpubind_flags_t	 . 97
23.9.3 Function Documentation	 . 98
23.9.3.1 hwloc_get_cpubind()	 . 98
23.9.3.2 hwloc_get_last_cpu_location()	 . 98
23.9.3.3 hwloc_get_proc_cpubind()	 . 98
23.9.3.4 hwloc_get_proc_last_cpu_location()	 . 99
23.9.3.5 hwloc_get_thread_cpubind()	 . 99
23.9.3.6 hwloc_set_cpubind()	 . 99
23.9.3.7 hwloc_set_proc_cpubind()	 . 99
23.9.3.8 hwloc_set_thread_cpubind()	 . 100
23.10 Memory binding	 . 100
23.10.1 Detailed Description	 . 101
23.10.2 Enumeration Type Documentation	101

23.10.2.1 hwloc_membind_flags_t	01
23.10.2.2 hwloc_membind_policy_t	02
23.10.3 Function Documentation	03
23.10.3.1 hwloc_alloc()	03
23.10.3.2 hwloc_alloc_membind()	03
23.10.3.3 hwloc_alloc_membind_policy()	04
23.10.3.4 hwloc_free()	04
23.10.3.5 hwloc_get_area_membind()	04
23.10.3.6 hwloc_get_area_memlocation()	04
23.10.3.7 hwloc_get_membind()	05
23.10.3.8 hwloc_get_proc_membind()	05
23.10.3.9 hwloc_set_area_membind()	06
23.10.3.10 hwloc_set_membind()	06
23.10.3.11 hwloc_set_proc_membind()	06
23.11 Changing the Source of Topology Discovery	07
23.11.1 Detailed Description	07
23.11.2 Enumeration Type Documentation	07
23.11.2.1 hwloc_topology_components_flag_e	07
23.11.3 Function Documentation	07
23.11.3.1 hwloc_topology_set_components()	07
23.11.3.2 hwloc_topology_set_pid()	80
23.11.3.3 hwloc_topology_set_synthetic()	80
23.11.3.4 hwloc_topology_set_xml()	80
23.11.3.5 hwloc_topology_set_xmlbuffer()	09
23.12 Topology Detection Configuration and Query	09
23.12.1 Detailed Description	10
23.12.2 Enumeration Type Documentation	10
23.12.2.1 hwloc_topology_flags_e	10
23.12.2.2 hwloc_type_filter_e	13
23.12.3 Function Documentation	14
23.12.3.1 hwloc_topology_get_flags()	14
23.12.3.2 hwloc_topology_get_support()	14
23.12.3.3 hwloc_topology_get_type_filter()	15
23.12.3.4 hwloc_topology_get_userdata()	15
23.12.3.5 hwloc_topology_is_thissystem()	15
23.12.3.6 hwloc_topology_set_all_types_filter()	15
23.12.3.7 hwloc_topology_set_cache_types_filter()	15
23.12.3.8 hwloc_topology_set_flags()	15
23.12.3.9 hwloc_topology_set_icache_types_filter()	15
23.12.3.10 hwloc_topology_set_io_types_filter()	16
23.12.3.11 hwloc_topology_set_type_filter()	16
23.12.3.12 hwloc topology set userdata()	16

23.13 Modifying a loaded Topology	16
23.13.1 Detailed Description	17
23.13.2 Enumeration Type Documentation	17
23.13.2.1 hwloc_allow_flags_e	17
23.13.2.2 hwloc_restrict_flags_e	17
23.13.3 Function Documentation	18
23.13.3.1 hwloc_obj_add_other_obj_sets()	18
23.13.3.2 hwloc_topology_alloc_group_object()	18
23.13.3.3 hwloc_topology_allow()	18
23.13.3.4 hwloc_topology_insert_group_object()	18
23.13.3.5 hwloc_topology_insert_misc_object()	19
23.13.3.6 hwloc_topology_refresh()	19
23.13.3.7 hwloc_topology_restrict()	20
23.14 Finding Objects inside a CPU set	20
23.14.1 Detailed Description	20
23.14.2 Function Documentation	20
23.14.2.1 hwloc_get_first_largest_obj_inside_cpuset()	20
23.14.2.2 hwloc_get_largest_objs_inside_cpuset()	21
23.14.2.3 hwloc_get_nbobjs_inside_cpuset_by_depth()	21
23.14.2.4 hwloc_get_nbobjs_inside_cpuset_by_type()	21
23.14.2.5 hwloc_get_next_obj_inside_cpuset_by_depth()	21
23.14.2.6 hwloc_get_next_obj_inside_cpuset_by_type()	22
23.14.2.7 hwloc_get_obj_index_inside_cpuset()	22
23.14.2.8 hwloc_get_obj_inside_cpuset_by_depth()	22
23.14.2.9 hwloc_get_obj_inside_cpuset_by_type()	23
23.15 Finding Objects covering at least CPU set	
23.15.1 Detailed Description	23
23.15.2 Function Documentation	23
23.15.2.1 hwloc_get_child_covering_cpuset()	23
23.15.2.2 hwloc_get_next_obj_covering_cpuset_by_depth()	23
23.15.2.3 hwloc_get_next_obj_covering_cpuset_by_type()	
23.15.2.4 hwloc_get_obj_covering_cpuset()	
23.16 Looking at Ancestor and Child Objects	
23.16.1 Detailed Description	
23.16.2 Function Documentation	24
23.16.2.1 hwloc_get_ancestor_obj_by_depth()	25
23.16.2.2 hwloc_get_ancestor_obj_by_type()	
23.16.2.3 hwloc_get_common_ancestor_obj()	
23.16.2.4 hwloc_get_next_child()	
23.16.2.5 hwloc_obj_is_in_subtree()	
23.17 Kinds of object Type	
23 17 1 Detailed Description	

23.17.2 Function Documentation	26
23.17.2.1 hwloc_obj_type_is_cache()	26
23.17.2.2 hwloc_obj_type_is_dcache()	26
23.17.2.3 hwloc_obj_type_is_icache()	26
23.17.2.4 hwloc_obj_type_is_io()	27
23.17.2.5 hwloc_obj_type_is_memory()	27
23.17.2.6 hwloc_obj_type_is_normal()	27
23.18 Looking at Cache Objects	27
23.18.1 Detailed Description	27
23.18.2 Function Documentation	27
23.18.2.1 hwloc_get_cache_covering_cpuset()	27
23.18.2.2 hwloc_get_cache_type_depth()	28
23.18.2.3 hwloc_get_shared_cache_covering_obj()	28
23.19 Finding objects, miscellaneous helpers	28
23.19.1 Detailed Description	28
23.19.2 Function Documentation	28
23.19.2.1 hwloc_bitmap_singlify_per_core()	29
23.19.2.2 hwloc_get_closest_objs()	29
23.19.2.3 hwloc_get_numanode_obj_by_os_index()	29
23.19.2.4 hwloc_get_obj_below_array_by_type()	29
23.19.2.5 hwloc_get_obj_below_by_type()	30
23.19.2.6 hwloc_get_obj_with_same_locality()	30
23.19.2.7 hwloc_get_pu_obj_by_os_index()	31
23.20 Distributing items over a topology	31
23.20.1 Detailed Description	31
23.20.2 Enumeration Type Documentation	31
23.20.2.1 hwloc_distrib_flags_e	31
23.20.3 Function Documentation	31
23.20.3.1 hwloc_distrib()	31
23.21 CPU and node sets of entire topologies	32
23.21.1 Detailed Description	32
23.21.2 Function Documentation	32
23.21.2.1 hwloc_topology_get_allowed_cpuset()	32
23.21.2.2 hwloc_topology_get_allowed_nodeset()	32
23.21.2.3 hwloc_topology_get_complete_cpuset()	33
23.21.2.4 hwloc_topology_get_complete_nodeset()	33
23.21.2.5 hwloc_topology_get_topology_cpuset()	33
23.21.2.6 hwloc_topology_get_topology_nodeset()	34
23.22 Converting between CPU sets and node sets	34
23.22.1 Detailed Description	34
23.22.2 Function Documentation	34
23.22.2.1 hwloc couset from nodeset()	34

23.22.2.2 hwloc_cpuset_to_nodeset()	134
23.23 Finding I/O objects	135
23.23.1 Detailed Description	135
23.23.2 Function Documentation	135
23.23.2.1 hwloc_bridge_covers_pcibus()	135
23.23.2.2 hwloc_get_next_bridge()	135
23.23.2.3 hwloc_get_next_osdev()	135
23.23.2.4 hwloc_get_next_pcidev()	136
23.23.2.5 hwloc_get_non_io_ancestor_obj()	136
23.23.2.6 hwloc_get_pcidev_by_busid()	136
23.23.2.7 hwloc_get_pcidev_by_busidstring()	136
23.24 The bitmap API	136
23.24.1 Detailed Description	138
23.24.2 Macro Definition Documentation	138
23.24.2.1 hwloc_bitmap_foreach_begin	138
23.24.2.2 hwloc_bitmap_foreach_end	138
23.24.3 Typedef Documentation	138
23.24.3.1 hwloc_bitmap_t	138
23.24.3.2 hwloc_const_bitmap_t	139
23.24.4 Function Documentation	139
23.24.4.1 hwloc_bitmap_allbut()	139
23.24.4.2 hwloc_bitmap_alloc()	139
23.24.4.3 hwloc_bitmap_alloc_full()	139
23.24.4.4 hwloc_bitmap_and()	139
23.24.4.5 hwloc_bitmap_andnot()	139
23.24.4.6 hwloc_bitmap_asprintf()	139
23.24.4.7 hwloc_bitmap_clr()	140
23.24.4.8 hwloc_bitmap_clr_range()	140
23.24.4.9 hwloc_bitmap_compare()	140
23.24.4.10 hwloc_bitmap_compare_first()	140
23.24.4.11 hwloc_bitmap_copy()	141
23.24.4.12 hwloc_bitmap_dup()	141
23.24.4.13 hwloc_bitmap_fill()	141
23.24.4.14 hwloc_bitmap_first()	141
23.24.4.15 hwloc_bitmap_first_unset()	141
23.24.4.16 hwloc_bitmap_free()	142
23.24.4.17 hwloc_bitmap_from_ith_ulong()	142
23.24.4.18 hwloc_bitmap_from_ulong()	142
23.24.4.19 hwloc_bitmap_from_ulongs()	142
23.24.4.20 hwloc_bitmap_intersects()	142
23.24.4.21 hwloc_bitmap_isequal()	142
23.24.4.22 hwloc_bitmap_isfull()	143

23.26.1 Detailed Description
23.26.2 Enumeration Type Documentation
23.26.2.1 hwloc_topology_export_synthetic_flags_e
23.26.3 Function Documentation
23.26.3.1 hwloc_topology_export_synthetic()
23.27 Retrieve distances between objects
23.27.1 Detailed Description
23.27.2 Enumeration Type Documentation
23.27.2.1 hwloc_distances_kind_e
23.27.2.2 hwloc_distances_transform_e
23.27.3 Function Documentation
23.27.3.1 hwloc_distances_get()
23.27.3.2 hwloc_distances_get_by_depth()
23.27.3.3 hwloc_distances_get_by_name()
23.27.3.4 hwloc_distances_get_by_type()
23.27.3.5 hwloc_distances_get_name()
23.27.3.6 hwloc_distances_release()
23.27.3.7 hwloc_distances_transform()
23.28 Helpers for consulting distance matrices
23.28.1 Detailed Description
23.28.2 Function Documentation
23.28.2.1 hwloc_distances_obj_index()
23.28.2.2 hwloc_distances_obj_pair_values()
23.29 Add distances between objects
23.29.1 Detailed Description
23.29.2 Typedef Documentation
23.29.2.1 hwloc_distances_add_handle_t
23.29.3 Enumeration Type Documentation
23.29.3.1 hwloc_distances_add_flag_e
23.29.4 Function Documentation
23.29.4.1 hwloc_distances_add_commit()
23.29.4.2 hwloc_distances_add_create()
23.29.4.3 hwloc_distances_add_values()
23.30 Remove distances between objects
23.30.1 Detailed Description
23.30.2 Function Documentation
23.30.2.1 hwloc_distances_release_remove()
23.30.2.2 hwloc_distances_remove()
23.30.2.3 hwloc_distances_remove_by_depth()
23.30.2.4 hwloc_distances_remove_by_type()
23.31 Comparing memory node attributes for finding where to allocate on
23.31.1 Detailed Description

23.31.2 Typedef Documentation	31
23.31.2.1 hwloc_memattr_id_t	31
23.31.3 Enumeration Type Documentation	31
23.31.3.1 hwloc_local_numanode_flag_e	31
23.31.3.2 hwloc_location_type_e	32
23.31.3.3 hwloc_memattr_id_e	32
23.31.4 Function Documentation	32
23.31.4.1 hwloc_get_local_numanode_objs()	3
23.31.4.2 hwloc_memattr_get_best_initiator()	3
23.31.4.3 hwloc_memattr_get_best_target()	3
23.31.4.4 hwloc_memattr_get_by_name()	34
23.31.4.5 hwloc_memattr_get_value()	34
23.32 Managing memory attributes	34
23.32.1 Detailed Description	35
23.32.2 Enumeration Type Documentation	35
23.32.2.1 hwloc_memattr_flag_e	35
23.32.3 Function Documentation	35
23.32.3.1 hwloc_memattr_get_flags()	35
23.32.3.2 hwloc_memattr_get_initiators()	35
23.32.3.3 hwloc_memattr_get_name()	36
23.32.3.4 hwloc_memattr_get_targets()	36
23.32.3.5 hwloc_memattr_register()	36
23.32.3.6 hwloc_memattr_set_value()	37
23.33 Kinds of CPU cores	37
23.33.1 Detailed Description	37
23.33.2 Function Documentation	8
23.33.2.1 hwloc_cpukinds_get_by_cpuset()	8
23.33.2.2 hwloc_cpukinds_get_info()	8
23.33.2.3 hwloc_cpukinds_get_nr()	39
23.33.2.4 hwloc_cpukinds_register()	39
23.34 Linux-specific helpers	39
23.34.1 Detailed Description	39
23.34.2 Function Documentation	70
23.34.2.1 hwloc_linux_get_tid_cpubind()	⁷ 0
23.34.2.2 hwloc_linux_get_tid_last_cpu_location()	⁷ 0
23.34.2.3 hwloc_linux_read_path_as_cpumask()	70
23.34.2.4 hwloc_linux_set_tid_cpubind()	⁷ 0
23.35 Interoperability with Linux libnuma unsigned long masks	⁷ 1
23.35.1 Detailed Description	⁷ 1
23.35.2 Function Documentation	⁷ 1
23.35.2.1 hwloc_cpuset_from_linux_libnuma_ulongs()	71
23.35.2.2 hwloc_cpuset_to_linux_libnuma_ulongs()	71

23.35.2.3 hwloc_nodeset_from_linux_libnuma_ulongs()	171
23.35.2.4 hwloc_nodeset_to_linux_libnuma_ulongs()	172
23.36 Interoperability with Linux libnuma bitmask	172
23.36.1 Detailed Description	172
23.36.2 Function Documentation	172
23.36.2.1 hwloc_cpuset_from_linux_libnuma_bitmask()	172
23.36.2.2 hwloc_cpuset_to_linux_libnuma_bitmask()	173
23.36.2.3 hwloc_nodeset_from_linux_libnuma_bitmask()	173
23.36.2.4 hwloc_nodeset_to_linux_libnuma_bitmask()	173
23.37 Windows-specific helpers	173
23.37.1 Detailed Description	173
23.37.2 Function Documentation	173
23.37.2.1 hwloc_windows_get_nr_processor_groups()	174
23.37.2.2 hwloc_windows_get_processor_group_cpuset()	174
23.38 Interoperability with glibc sched affinity	174
23.38.1 Detailed Description	174
23.38.2 Function Documentation	174
23.38.2.1 hwloc_cpuset_from_glibc_sched_affinity()	174
23.38.2.2 hwloc_cpuset_to_glibc_sched_affinity()	175
23.39 Interoperability with OpenCL	175
23.39.1 Detailed Description	175
23.39.2 Function Documentation	175
23.39.2.1 hwloc_opencl_get_device_cpuset()	175
23.39.2.2 hwloc_opencl_get_device_osdev()	176
23.39.2.3 hwloc_opencl_get_device_osdev_by_index()	176
23.39.2.4 hwloc_opencl_get_device_pci_busid()	176
23.40 Interoperability with the CUDA Driver API	177
23.40.1 Detailed Description	177
23.40.2 Function Documentation	177
23.40.2.1 hwloc_cuda_get_device_cpuset()	177
23.40.2.2 hwloc_cuda_get_device_osdev()	177
23.40.2.3 hwloc_cuda_get_device_osdev_by_index()	178
23.40.2.4 hwloc_cuda_get_device_pci_ids()	178
23.40.2.5 hwloc_cuda_get_device_pcidev()	178
23.41 Interoperability with the CUDA Runtime API	178
23.41.1 Detailed Description	178
23.41.2 Function Documentation	179
23.41.2.1 hwloc_cudart_get_device_cpuset()	179
23.41.2.2 hwloc_cudart_get_device_osdev_by_index()	179
23.41.2.3 hwloc_cudart_get_device_pci_ids()	179
23.41.2.4 hwloc_cudart_get_device_pcidev()	179
23.42 Interoperability with the NVIDIA Management Library	180

23.42.1 Detailed Description
23.42.2 Function Documentation
23.42.2.1 hwloc_nvml_get_device_cpuset()
23.42.2.2 hwloc_nvml_get_device_osdev()
23.42.2.3 hwloc_nvml_get_device_osdev_by_index()
23.43 Interoperability with the ROCm SMI Management Library
23.43.1 Detailed Description
23.43.2 Function Documentation
23.43.2.1 hwloc_rsmi_get_device_cpuset()
23.43.2.2 hwloc_rsmi_get_device_osdev()
23.43.2.3 hwloc_rsmi_get_device_osdev_by_index()
23.44 Interoperability with the oneAPI Level Zero interface
23.44.1 Detailed Description
23.44.2 Function Documentation
23.44.2.1 hwloc_levelzero_get_device_cpuset()
23.44.2.2 hwloc_levelzero_get_device_osdev()
23.45 Interoperability with OpenGL displays
23.45.1 Detailed Description
23.45.2 Function Documentation
23.45.2.1 hwloc_gl_get_display_by_osdev()
23.45.2.2 hwloc_gl_get_display_osdev_by_name()
23.45.2.3 hwloc_gl_get_display_osdev_by_port_device()
23.46 Interoperability with OpenFabrics
23.46.1 Detailed Description
23.46.2 Function Documentation
23.46.2.1 hwloc_ibv_get_device_cpuset()
23.46.2.2 hwloc_ibv_get_device_osdev()
23.46.2.3 hwloc_ibv_get_device_osdev_by_name()
23.47 Topology differences
23.47.1 Detailed Description
23.47.2 Typedef Documentation
23.47.2.1 hwloc_topology_diff_obj_attr_type_t
23.47.2.2 hwloc_topology_diff_t
23.47.2.3 hwloc_topology_diff_type_t
23.47.3 Enumeration Type Documentation
23.47.3.1 hwloc_topology_diff_apply_flags_e
23.47.3.2 hwloc_topology_diff_obj_attr_type_e
23.47.3.3 hwloc_topology_diff_type_e
23.47.4 Function Documentation
23.47.4.1 hwloc_topology_diff_apply()
23.47.4.2 hwloc_topology_diff_build()
23.47.4.3 hwloc topology diff destroy()

23.47.4.4 hwloc_topology_diff_export_xml()
23.47.4.5 hwloc_topology_diff_export_xmlbuffer()
23.47.4.6 hwloc_topology_diff_load_xml()
23.47.4.7 hwloc_topology_diff_load_xmlbuffer()
23.48 Sharing topologies between processes
23.48.1 Detailed Description
23.48.2 Function Documentation
23.48.2.1 hwloc_shmem_topology_adopt()
23.48.2.2 hwloc_shmem_topology_get_length()
23.48.2.3 hwloc_shmem_topology_write()
23.49 Components and Plugins: Discovery components
23.49.1 Detailed Description
23.50 Components and Plugins: Discovery backends
23.50.1 Detailed Description
23.50.2 Typedef Documentation
23.50.2.1 hwloc_disc_phase_t
23.50.3 Enumeration Type Documentation
23.50.3.1 hwloc_disc_phase_e
23.50.3.2 hwloc_disc_status_flag_e
23.50.4 Function Documentation
23.50.4.1 hwloc_backend_alloc()
23.50.4.2 hwloc_backend_enable()
23.51 Components and Plugins: Generic components
23.51.1 Detailed Description
23.51.2 Typedef Documentation
23.51.2.1 hwloc_component_type_t
23.51.3 Enumeration Type Documentation
23.51.3.1 hwloc_component_type_e
23.52 Components and Plugins: Core functions to be used by components
23.52.1 Detailed Description
23.52.2 Function Documentation
23.52.2.1 hwlocinsert_object_by_cpuset()
23.52.2.2 hwloc_alloc_setup_object()
23.52.2.3 hwloc_hide_errors()
23.52.2.4 hwloc_insert_object_by_parent()
23.52.2.5 hwloc_obj_add_children_sets()
23.52.2.6 hwloc_plugin_check_namespace()
23.52.2.7 hwloc_topology_reconnect()
23.53 Components and Plugins: Filtering objects
23.53.1 Detailed Description
23.53.2 Function Documentation
23.53.2.1 hwloc filter check keep object()

23.53.2.2 hwloc_filter_check_keep_object_type()	197
23.53.2.3 hwloc_filter_check_osdev_subtype_important()	197
23.53.2.4 hwloc_filter_check_pcidev_subtype_important()	197
23.54 Components and Plugins: helpers for PCI discovery	197
23.54.1 Detailed Description	198
23.54.2 Function Documentation	198
23.54.2.1 hwloc_pcidisc_check_bridge_type()	198
23.54.2.2 hwloc_pcidisc_find_bridge_buses()	198
23.54.2.3 hwloc_pcidisc_find_cap()	198
23.54.2.4 hwloc_pcidisc_find_linkspeed()	198
23.54.2.5 hwloc_pcidisc_tree_attach()	199
23.54.2.6 hwloc_pcidisc_tree_insert_by_busid()	199
23.55 Components and Plugins: finding PCI objects during other discoveries	199
23.55.1 Detailed Description	199
23.55.2 Typedef Documentation	199
23.55.2.1 hwloc_backend_distances_add_handle_t	199
23.55.3 Function Documentation	199
23.55.3.1 hwloc_backend_distances_add_commit()	200
23.55.3.2 hwloc_backend_distances_add_create()	200
23.55.3.3 hwloc_backend_distances_add_values()	200
23.55.3.4 hwloc_pci_find_by_busid()	200
00.550.51.1	
23.55.3.5 hwloc_pci_find_parent_by_busid()	200
23.55.3.5 hwloc_pci_find_parent_by_busid()	
	201
23.56 Netloc API	201 201
23.56 Netloc API	201 201 201
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation	201 201 201
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum	201 201 201 201 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation	201 201 201 201 203 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference	201 201 201 201 203 203 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description	201 201 201 201 203 203 203 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation	201 201 201 201 203 203 203 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable	201 201 201 201 203 203 203 203 203 203
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover	201 201 201 203 203 203 203 203 203 204
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover 24.1.2.3 flags	201 201 201 201 203 203 203 203 203 204 204
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover 24.1.2.3 flags 24.1.2.4 get_pci_busid_cpuset	201 201 201 203 203 203 203 203 204 204 204
23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover 24.1.2.3 flags 24.1.2.4 get_pci_busid_cpuset 24.1.2.5 is_thissystem	201 201 201 201 203 203 203 203 204 204 204 204
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover 24.1.2.3 flags 24.1.2.4 get_pci_busid_cpuset 24.1.2.5 is_thissystem 24.1.2.6 phases	201 201 201 203 203 203 203 203 204 204 204 204 204
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.2 discover 24.1.2.3 flags 24.1.2.4 get_pci_busid_cpuset 24.1.2.5 is_thissystem 24.1.2.6 phases 24.1.2.7 private_data	201 201 201 203 203 203 203 203 204 204 204 204 204
23.56 Netloc API 23.56.1 Detailed Description 23.56.2 Enumeration Type Documentation 23.56.2.1 anonymous enum 24 Data Structure Documentation 24.1 hwloc_backend Struct Reference 24.1.1 Detailed Description 24.1.2 Field Documentation 24.1.2.1 disable 24.1.2.3 flags 24.1.2.4 get_pci_busid_cpuset 24.1.2.5 is_thissystem 24.1.2.6 phases 24.1.2.7 private_data 24.2 hwloc_obj_attr_u::hwloc_bridge_attr_s Struct Reference	201 201 201 203 203 203 203 203 204 204 204 204 204 204 205

24.2.2.2 domain	205
24.2.2.3	205
24.2.2.4 downstream_type	205
24.2.2.5 [1/2]	205
24.2.2.6 pci [2/2]	205
24.2.2.7 secondary_bus	205
24.2.2.8 subordinate_bus	205
24.2.2.9	205
24.2.2.10 upstream_type	205
24.3 hwloc_obj_attr_u::hwloc_cache_attr_s Struct Reference	206
24.3.1 Detailed Description	206
24.3.2 Field Documentation	206
24.3.2.1 associativity	206
24.3.2.2 depth	206
24.3.2.3 linesize	206
24.3.2.4 size	206
24.3.2.5 type	206
24.4 hwloc_cl_device_topology_amd Union Reference	206
24.4.1 Field Documentation	207
24.4.1.1 bus	207
24.4.1.2 data	207
24.4.1.3 device	207
24.4.1.4 function	207
24.4.1.5	207
24.4.1.6	207
24.4.1.7 type	207
24.4.1.8 unused	207
24.5 hwloc_component Struct Reference	208
24.5.1 Detailed Description	208
24.5.2 Field Documentation	208
24.5.2.1 abi	208
24.5.2.2 data	208
24.5.2.3 finalize	208
24.5.2.4 flags	208
24.5.2.5 init	209
24.5.2.6 type	209
24.6 hwloc_disc_component Struct Reference	209
24.6.1 Detailed Description	209
24.6.2 Field Documentation	209
24.6.2.1 enabled_by_default	209
24.6.2.2 excluded_phases	210
24.6.2.3 instantiate	210

24.6.2.4 name	210
24.6.2.5 phases	210
24.6.2.6 priority	210
24.7 hwloc_disc_status Struct Reference	210
24.7.1 Detailed Description	210
24.7.2 Field Documentation	210
24.7.2.1 excluded_phases	211
24.7.2.2 flags	211
24.7.2.3 phase	211
24.8 hwloc_distances_s Struct Reference	211
24.8.1 Detailed Description	211
24.8.2 Field Documentation	211
24.8.2.1 kind	211
24.8.2.2 nbobjs	212
24.8.2.3 objs	212
24.8.2.4 values	212
24.9 hwloc_obj_attr_u::hwloc_group_attr_s Struct Reference	212
24.9.1 Detailed Description	212
24.9.2 Field Documentation	212
24.9.2.1 depth	212
24.9.2.2 dont_merge	212
24.9.2.3 kind	212
24.9.2.4 subkind	213
24.10 hwloc_info_s Struct Reference	213
24.10.1 Detailed Description	213
24.10.2 Field Documentation	213
24.10.2.1 name	213
24.10.2.2 value	213
24.11 hwloc_location Struct Reference	213
24.11.1 Detailed Description	213
24.11.2 Field Documentation	214
24.11.2.1 location	214
24.11.2.2 type	214
24.12 hwloc_location::hwloc_location_u Union Reference	214
24.12.1 Detailed Description	214
24.12.2 Field Documentation	214
24.12.2.1 cpuset	214
24.12.2.2 object	214
24.13 hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s Struct Reference 2	214
24.13.1 Detailed Description	215
24.13.2 Field Documentation	215
24 13 2 1 count	215

24.13.2.2 size	215
24.14 hwloc_obj_attr_u::hwloc_numanode_attr_s Struct Reference	215
24.14.1 Detailed Description	215
24.14.2 Field Documentation	215
24.14.2.1 local_memory	215
24.14.2.2 page_types	215
24.14.2.3 page_types_len	216
24.15 hwloc_obj Struct Reference	216
24.15.1 Detailed Description	217
24.15.2 Field Documentation	217
24.15.2.1 arity	217
24.15.2.2 attr	217
24.15.2.3 children	217
24.15.2.4 complete_cpuset	217
24.15.2.5 complete_nodeset	217
24.15.2.6 cpuset	218
24.15.2.7 depth	218
24.15.2.8 first_child	218
24.15.2.9 gp_index	218
24.15.2.10 infos	218
24.15.2.11 infos_count	218
24.15.2.12 io_arity	218
24.15.2.13 io_first_child	219
24.15.2.14 last_child	219
24.15.2.15 logical_index	219
24.15.2.16 memory_arity	219
24.15.2.17 memory_first_child	219
24.15.2.18 misc_arity	219
24.15.2.19 misc_first_child	219
24.15.2.20 name	219
24.15.2.21 next_cousin	219
24.15.2.22 next_sibling	220
24.15.2.23 nodeset	220
24.15.2.24 os_index	220
24.15.2.25 parent	220
24.15.2.26 prev_cousin	220
24.15.2.27 prev_sibling	220
24.15.2.28 sibling_rank	220
24.15.2.29 subtype	221
24.15.2.30 symmetric_subtree	221
24.15.2.31 total_memory	221
24.15.2.32 type	221

24.15.2.33 userdata	221
24.16 hwloc_obj_attr_u Union Reference	221
24.16.1 Detailed Description	222
24.16.2 Field Documentation	222
24.16.2.1 bridge	222
24.16.2.2 cache	222
24.16.2.3 group	222
24.16.2.4 numanode	222
24.16.2.5 osdev	222
24.16.2.6 pcidev	222
24.17 hwloc_obj_attr_u::hwloc_osdev_attr_s Struct Reference	222
24.17.1 Detailed Description	222
24.17.2 Field Documentation	222
24.17.2.1 type	223
24.18 hwloc_obj_attr_u::hwloc_pcidev_attr_s Struct Reference	223
24.18.1 Detailed Description	223
24.18.2 Field Documentation	223
24.18.2.1 bus	223
24.18.2.2 class_id	223
24.18.2.3 dev	223
24.18.2.4 device_id	223
24.18.2.5 domain	223
24.18.2.6 func	224
24.18.2.7 linkspeed	224
24.18.2.8 revision	224
24.18.2.9 subdevice_id	224
24.18.2.10 subvendor_id	224
24.18.2.11 vendor_id	224
24.19 hwloc_topology_cpubind_support Struct Reference	224
24.19.1 Detailed Description	224
24.19.2 Field Documentation	224
24.19.2.1 get_proc_cpubind	225
24.19.2.2 get_proc_last_cpu_location	225
24.19.2.3 get_thisproc_cpubind	225
24.19.2.4 get_thisproc_last_cpu_location	225
24.19.2.5 get_thisthread_cpubind	225
24.19.2.6 get_thisthread_last_cpu_location	225
24.19.2.7 get_thread_cpubind	225
24.19.2.8 set_proc_cpubind	225
24.19.2.9 set_thisproc_cpubind	225
24.19.2.10 set_thisthread_cpubind	225
24.19.2.11 set_thread_cpubind	225

24.20 hwloc_topology_diff_u::hwloc_topology_diff_generic_s Struct Reference
24.20.1 Field Documentation
24.20.1.1 next
24.20.1.2 type
24.21 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s Struct Reference 220
24.21.1 Field Documentation
24.21.1.1 type
24.22 hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s Struct Reference
24.22.1 Field Documentation
24.22.1.1 diff
24.22.1.2 next
24.22.1.3 obj_depth
24.22.1.4 obj_index
24.22.1.5 type
24.23 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s Struct Reference 22
24.23.1 Detailed Description
24.23.2 Field Documentation
24.23.2.1 name
24.23.2.2 newvalue
24.23.2.3 oldvalue
24.23.2.4 type
24.24 hwloc_topology_diff_obj_attr_u Union Reference
24.24.1 Detailed Description
24.24.2 Field Documentation
24.24.2.1 generic
24.24.2.2 string
24.24.2.3 uint64
24.25 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s Struct Reference 229
24.25.1 Detailed Description
24.25.2 Field Documentation
24.25.2.1 index
24.25.2.2 newvalue
24.25.2.3 oldvalue
24.25.2.4 type
24.26 hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s Struct Reference
24.26.1 Field Documentation
24.26.1.1 next
24.26.1.2 obj_depth
24.26.1.3 obj_index
24.26.1.4 type
24.27 hwloc_topology_diff_u Union Reference
24 27 1 Detailed Description

24.27.2 Field Documentation	30
24.27.2.1 generic	31
24.27.2.2 obj_attr	31
24.27.2.3 too_complex	31
24.28 hwloc_topology_discovery_support Struct Reference	31
24.28.1 Detailed Description	31
24.28.2 Field Documentation	31
24.28.2.1 cpukind_efficiency	31
24.28.2.2 disallowed_numa	31
24.28.2.3 disallowed_pu	31
24.28.2.4 numa	32
24.28.2.5 numa_memory	32
24.28.2.6 pu	32
24.29 hwloc_topology_membind_support Struct Reference	32
24.29.1 Detailed Description	32
24.29.2 Field Documentation	32
24.29.2.1 alloc_membind	32
24.29.2.2 bind_membind	33
24.29.2.3 firsttouch_membind	33
24.29.2.4 get_area_membind	33
24.29.2.5 get_area_memlocation	33
24.29.2.6 get_proc_membind	33
24.29.2.7 get_thisproc_membind	33
24.29.2.8 get_thisthread_membind	33
24.29.2.9 interleave_membind	33
24.29.2.10 migrate_membind	33
24.29.2.11 nexttouch_membind	33
24.29.2.12 set_area_membind	33
24.29.2.13 set_proc_membind	33
24.29.2.14 set_thisproc_membind	34
24.29.2.15 set_thisthread_membind	34
24.30 hwloc_topology_misc_support Struct Reference	34
24.30.1 Detailed Description	34
24.30.2 Field Documentation	34
24.30.2.1 imported_support	34
24.31 hwloc_topology_support Struct Reference	34
24.31.1 Detailed Description	34
24.31.2 Field Documentation	34
24.31.2.1 cpubind	35
24.31.2.2 discovery	35
24.31.2.3 membind	35
24.31.2.4 misc	35

Chapter 1

Hardware Locality

Portable abstraction of parallel architectures for high-performance computing

1.1 Introduction

The Hardware Locality (hwloc) software project aims at easing the process of discovering hardware resources in parallel architectures. It offers command-line tools and a C API for consulting these resources, their locality, attributes, and interconnection. hwloc primarily aims at helping high-performance computing (HPC) applications, but is also applicable to any project seeking to exploit code and/or data locality on modern computing platforms. hwloc is actually made of two subprojects distributed together:

- The original hwloc project for describing the internals of computing nodes. It is described in details starting at section Hardware Locality (hwloc) Introduction.
- The network-oriented companion called netloc (Network Locality), described in details starting with section Network Locality (netloc).

Netloc may be disabled, but the original hwloc cannot. Both hwloc and netloc APIs are documented after these sections.

1.2 Installation

hwloc (https://www.open-mpi.org/projects/hwloc/) is available under the BSD license. It is hosted as a sub-project of the overall Open MPI project (https://www.open-mpi.org/). Note that hwloc does not require any functionality from Open MPI – it is a wholly separate (and much smaller!) project and code base. It just happens to be hosted as part of the overall Open MPI project.

1.2.1 Basic Installation

Installation is the fairly common GNU-based process:

```
shell$ ./configure --prefix=...
shell$ make
shell$ make install
```

hwloc- and netloc-specific configure options and requirements are documented in sections hwloc Installation and Netloc Installation respectively.

Also note that if you install supplemental libraries in non-standard locations, hwloc's configure script may not be able to find them without some help. You may need to specify additional CPPFLAGS, LDFLAGS, or PKG_CONFIG_PATH values on the configure command line.

For example, if libpciaccess was installed into /opt/pciaccess, hwloc's configure script may not find it be default. Try adding PKG_CONFIG_PATH to the ./configure command line, like this:

2 Hardware Locality

```
./configure PKG_CONFIG_PATH=/opt/pciaccess/lib/pkgconfig ...
```

Running the "Istopo" tool is a good way to check as a graphical output whether hwloc properly detected the architecture of your node. Netloc command-line tools can be used to display the network topology interconnecting your nodes.

1.2.2 Installing from a Git clone

Additionally, the code can be directly cloned from Git:

```
shell$ git clone https://github.com/open-mpi/hwloc.git
shell$ cd hwloc
shell$ ./autogen.sh
```

Note that GNU Autoconf >=2.63, Automake >=1.11 and Libtool >=2.2.6 are required when building from a Git clone.

Nightly development snapshots are available on the web site, they can be configured and built without any need for Git or GNU Autotools.

1.3 Questions and Bugs

Bugs should be reported in the tracker (https://github.com/open-mpi/hwloc/issues). Opening a new issue automatically displays lots of hints about how to debug and report issues.

Questions may be sent to the users or developers mailing lists (https://www.open-mpi.org/community/lists/hwloophp).

There is also a #hwloc IRC channel on Freenode (irc.freenode.net).

Chapter 2

Hardware Locality (hwloc) Introduction

Portable abstraction of hierarchical architectures for high-performance computing

See also Further Reading for links to more sections about hwloc concepts.

2.1 hwloc Summary

hwloc provides command line tools and a C API to obtain the hierarchical map of key computing elements within a node, such as: NUMA memory nodes, shared caches, processor packages, dies and cores, processing units (logical processors or "threads") and even I/O devices. hwloc also gathers various attributes such as cache and memory information, and is portable across a variety of different operating systems and platforms. hwloc primarily aims at helping high-performance computing (HPC) applications, but is also applicable to any project

seeking to exploit code and/or data locality on modern computing platforms.

hwloc supports the following operating systems:

- Linux (including old kernels not having sysfs topology information, with knowledge of cpusets, ScaleMP vSMP support, etc.) on all supported hardware, including Intel Xeon Phi and NumaScale NumaConnect.
- · Solaris (with support for processor sets and logical domains)
- AIX
- · Darwin / OS X
- FreeBSD and its variants (such as kFreeBSD/GNU)
- NetBSD
- HP-UX
- Microsoft Windows
- IBM BlueGene/Q Compute Node Kernel (CNK)

Since it uses standard Operating System information, hwloc's support is mostly independant from the processor type (x86, powerpc, ...) and just relies on the Operating System support. The main exception is BSD operating systems (NetBSD, FreeBSD, etc.) because they do not provide support topology information, hence hwloc uses an x86-only CPUID-based backend (which can be used for other OSes too, see the Components and plugins section). To check whether hwloc works on a particular machine, just try to build it and run lstopoorlstopo-no-graphics. If some things do not look right (e.g. bogus or missing cache information), see Questions and Bugs. hwloc only reports the number of processors on unsupported operating systems; no topology information is available.

For development and debugging purposes, hwloc also offers the ability to work on "fake" topologies:

Symmetrical tree of resources generated from a list of level arities, see Synthetic topologies.

Remote machine simulation through the gathering of topology as XML files, see Importing and exporting topologies from/to XML

hwloc can display the topology in a human-readable format, either in graphical mode (X11), or by exporting in one of several different formats, including: plain text, LaTeX tikzpicture, PDF, PNG, and FIG (see Command-line Examples below). Note that some of the export formats require additional support libraries.

hwloc offers a programming interface for manipulating topologies and objects. It also brings a powerful CPU bitmap API that is used to describe topology objects location on physical/logical processors. See the Programming Interface below. It may also be used to binding applications onto certain cores or memory nodes. Several utility programs are also provided to ease command-line manipulation of topology objects, binding of processes, and so on. Perl bindings are available from Bernd Kallies on CPAN.

Python bindings are available from Guy Streeter:

- Fedora RPM and tarball.
- git tree (html).

2.2 hwloc Installation

The generic installation procedure for both hwloc and netloc is described in Installation.

The hwloc command-line tool "Istopo" produces human-readable topology maps, as mentioned above. It can also export maps to the "fig" file format. Support for PDF, Postscript, and PNG exporting is provided if the "Cairo" development package (usually cairo-devel or libcairo2-dev) can be found in "Istopo" when hwloc is configured and build.

The hwloc core may also benefit from the following development packages:


- libpciaccess for full I/O device discovery (libpciaccess-devel or libpciaccess-dev package). On Linux, PCI discovery may still be performed (without vendor/device names) even if libpciaccess cannot be used.
- · AMD or NVIDIA OpenCL implementations for OpenCL device discovery.
- the NVIDIA CUDA Toolkit for CUDA device discovery. See How do I enable CUDA and select which CUDA version to use?.
- the NVIDIA Management Library (NVML) for NVML device discovery. It is included in CUDA since version 8.0. Older NVML releases were available within the NVIDIA GPU Deployment Kit from https://developer.nvidia.com/gpu-deployment-kit.
- the NV-CONTROL X extension library (NVCtrl) for NVIDIA display discovery. The relevant development package is usually libXNVCtrl-devel or libxnvctrl-dev. It is also available within nvidia-settings from ftp://download.nvidia.com/XFree86/nvidia-settings/ and https://github.com/NVIDIA/nvidia-settings/.
- the AMD ROCm SMI library for RSMI device discovery. The relevant development package is usually rocm-smi-lib64 or librocm-smi-dev.
- the oneAPI Level Zero library. The relevant development package is usually level-zero-dev or level-zero-devel.
- libxml2 for full XML import/export support (otherwise, the internal minimalistic parser will only be able to import XML files that were exported by the same hwloc release). See Importing and exporting topologies from/to XML files for details. The relevant development package is usually libxml2-devel or libxml2-dev.
- libudev on Linux for easier discovery of OS device information (otherwise hwloc will try to manually parse udev raw files). The relevant development package is usually libudev-devel or libudev-dev.
- libtool's ltdl library for dynamic plugin loading if the native dlopen cannot be used. The relevant development package is usually libtool-ltdl-devel or libltdl-dev.

PCI and XML support may be statically built inside the main hwloc library, or as separate dynamically-loaded plugins (see the Components and plugins section).

Note that because of the possibility of GPL taint, the pciutils library libpci will not be used (remember that hwloc is BSD-licensed).

2.3 Command-line Examples

On a 4-package 2-core machine with hyper-threading, the 1stopo tool may show the following graphical output:

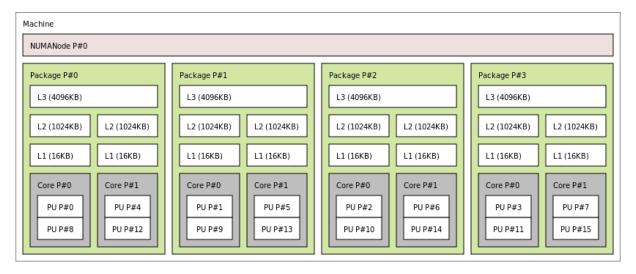

Here's the equivalent output in textual form:

```
Machine
 NUMANode L#0 (P#0)
  Package L#0 + L3 L#0 (4096KB)
   L2 L#0 (1024KB) + L1 L#0 (16KB) + Core L#0
     PU L#0 (P#0)
     PU L#1 (P#8)
    L2 L#1 (1024KB) + L1 L#1 (16KB) + Core L#1
     PU L#2 (P#4)
     PU L#3 (P#12)
  Package L#1 + L3 L#1 (4096KB)
    L2 L#2 (1024KB) + L1 L#2 (16KB) + Core L#2
     PU L#4 (P#1)
     PU L#5 (P#9)
    L2 L#3 (1024KB) + L1 L#3 (16KB) + Core L#3
     PU L#6 (P#5)
     PU L#7 (P#13)
  Package L#2 + L3 L#2 (4096KB)
    L2 L#4 (1024KB) + L1 L#4 (16KB) + Core L#4
     PU L#8 (P#2)
      PU L#9 (P#10)
    L2 L#5 (1024KB) + L1 L#5 (16KB) + Core L#5
     PU L#10 (P#6)
     PU L#11 (P#14)
  Package L#3 + L3 L#3 (4096KB)
    L2 L\#6 (1024KB) + L1 L\#6 (16KB) + Core L\#6
     PU L#12 (P#3)
     PU L#13 (P#11)
    L2 L#7 (1024KB) + L1 L#7 (16KB) + Core L#7
      PU L#14 (P#7)
      PU L#15 (P#15)
```

Note that there is also an equivalent output in XML that is meant for exporting/importing topologies but it is hardly readable to human-beings (see Importing and exporting topologies from/to XML files for details).


On a 4-package 2-core Opteron NUMA machine (with two core cores disallowed by the administrator), the lstopo tool may show the following graphical output (with --disallowed for displaying disallowed objects):



Here's the equivalent output in textual form:

```
Machine (32GB total)
  Package L#0
    NUMANode L#0 (P#0 8190MB)
    L2 L\#0 (1024KB) + L1 L\#0 (64KB) + Core L\#0 + PU L\#0 (P\#0)
    L2 L#1 (1024KB) + L1 L#1 (64KB) + Core L#1 + PU L#1 (P#1)
  Package L#1
    NUMANode L#1 (P#1 8192MB)
    L2 L#2 (1024KB) + L1 L#2 (64KB) + Core L#2 + PU L#2 (P#2)
    L2 L#3 (1024KB) + L1 L#3 (64KB) + Core L#3 + PU L#3 (P#3)
  Package L#2
    NUMANode L#2 (P#2 8192MB)
    L2 L#4 (1024KB) + L1 L#4 (64KB) + Core L#4 + PU L#4 (P#4)
    L2 L#5 (1024KB) + L1 L#5 (64KB) + Core L#5 + PU L#5 (P#5)
  Package L#3
    NUMANode L#3 (P#3 8192MB)
    L2 L#6 (1024KB) + L1 L#6 (64KB) + Core L#6 + PU L#6 (P#6)
    L2 L#7 (1024KB) + L1 L#7 (64KB) + Core L#7 + PU L#7 (P#7)
```

On a 2-package quad-core Xeon (pre-Nehalem, with 2 dual-core dies into each package):

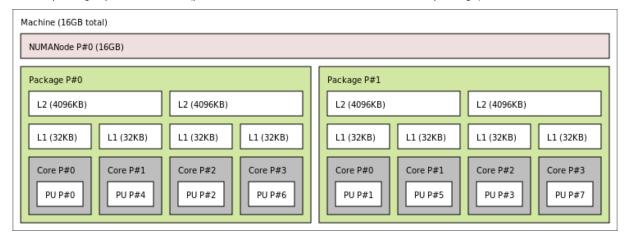

Here's the same output in textual form:

```
Machine (total 16GB)
 NUMANode L#0 (P#0 16GB)
  Package L#0
    T.2 T.#0 (4096KB)
      L1 L\#0 (32KB) + Core L\#0 + PU L\#0 (P\#0)
      L1 L#1 (32KB) + Core L#1 + PU L#1 (P#4)
    L2 L#1 (4096KB)
     L1 L#2 (32KB) + Core L#2 + PU L#2 (P#2)
      L1 L#3 (32KB) + Core L#3 + PU L#3 (P#6)
  Package L#1
    L2 L#2 (4096KB)
      L1 L#4 (32KB) + Core L#4 + PU L#4 (P#1)
      L1 L#5 (32KB) + Core L#5 + PU L#5 (P#5)
    L2 L#3 (4096KB)
     L1 L#6 (32KB) + Core L#6 + PU L#6 (P#3)
      L1 L\#7 (32KB) + Core L\#7 + PU L\#7 (P\#7)
```

2.4 Programming Interface

The basic interface is available in **hwloc.h**. Some higher-level functions are available in **hwloc/helper.h** to reduce the need to manually manipulate objects and follow links between them. Documentation for all these is provided later in this document. Developers may also want to look at hwloc/inlines.h which contains the actual inline code of some **hwloc.h** routines, and at this document, which provides good higher-level topology traversal examples.

To precisely define the vocabulary used by hwloc, a Terms and Definitions section is available and should probably be read first.

Each hwloc object contains a cpuset describing the list of processing units that it contains. These bitmaps may be used for CPU binding and Memory binding. hwloc offers an extensive bitmap manipulation interface in **hwloc/bitmap.h**.

Moreover, hwloc also comes with additional helpers for interoperability with several commonly used environments. See the Interoperability With Other Software section for details.

The complete API documentation is available in a full set of HTML pages, man pages, and self-contained PDF files (formatted for both both US letter and A4 formats) in the source tarball in doc/doxygen-doc/.


NOTE: If you are building the documentation from a Git clone, you will need to have Doxygen and pdflatex installed – the documentation will be built during the normal "make" process. The documentation is installed during "make install" to \$prefix/share/doc/hwloc/ and your systems default man page tree (under \$prefix, of course).

2.4.1 Portability

Operating System have varying support for CPU and memory binding, e.g. while some Operating Systems provide interfaces for all kinds of CPU and memory bindings, some others provide only interfaces for a limited number of kinds of CPU and memory binding, and some do not provide any binding interface at all. Hwloc's binding functions would then simply return the ENOSYS error (Function not implemented), meaning that the underlying Operating System does not provide any interface for them. CPU binding and Memory binding provide more information on which hwloc binding functions should be preferred because interfaces for them are usually available on the supported Operating Systems.

Similarly, the ability of reporting topology information varies from one platform to another. As shown in Command-line Examples, hwloc can obtain information on a wide variety of hardware topologies. However, some platforms and/or operating system versions will only report a subset of this information. For example, on an PPC64-based system with 8 cores (each with 2 hardware threads) running a default 2.6.18-based kernel from RHEL 5.4, hwloc is only able to glean information about NUMA nodes and processor units (PUs). No information about caches, packages, or cores is available.

Here's the graphical output from Istopo on this platform when Simultaneous Multi-Threading (SMT) is enabled:




And here's the graphical output from Istopo on this platform when SMT is disabled:



Notice that hwloc only sees half the PUs when SMT is disabled. PU L#6, for example, seems to change location from NUMA node #0 to #1. In reality, no PUs "moved" – they were simply re-numbered when hwloc only saw half as many (see also Logical index in Indexes and Sets). Hence, PU L#6 in the SMT-disabled picture probably corresponds to PU L#12 in the SMT-enabled picture.

This same "PUs have disappeared" effect can be seen on other platforms – even platforms / OSs that provide much more information than the above PPC64 system. This is an unfortunate side-effect of how operating systems report information to hwloc.

Note that upgrading the Linux kernel on the same PPC64 system mentioned above to 2.6.34, hwloc is able to discover all the topology information. The following picture shows the entire topology layout when SMT is enabled:

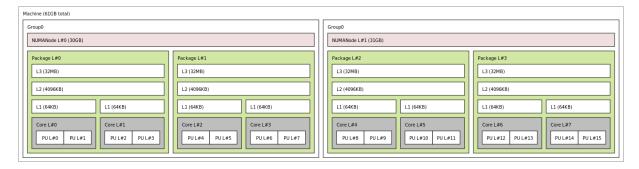

Developers using the hwloc API or XML output for portable applications should therefore be extremely careful to not make any assumptions about the structure of data that is returned. For example, per the above reported PPC topology, it is not safe to assume that PUs will always be descendants of cores.

Additionally, future hardware may insert new topology elements that are not available in this version of hwloc. Long-lived applications that are meant to span multiple different hardware platforms should also be careful about making structure assumptions. For example, a new element may someday exist between a core and a PU.

2.4.2 API Example

The following small C example (available in the source tree as ``doc/examples/hwloc-hello.c") prints the topology of the machine and performs some thread and memory binding. More examples are available in the doc/examples/directory of the source tree.

```
/* Example hwloc API program.
 * See other examples under doc/examples/ in the source tree
 * Copyright © 2009-2016 Inria. All rights reserved.
 * Copyright © 2009-2011 Université Bordeaux
* Copyright © 2009-2010 Cisco Systems, Inc. All rights reserved.
 * See COPYING in top-level directory.
 * hwloc-hello.c
#include "hwloc.h"
#include <errno.h>
#include <stdio.h>
#include <string.h>
static void print_children(hwloc_topology_t topology, hwloc_obj_t obj,
                             int depth)
    char type[32], attr[1024];
    unsigned i;
    hwloc_obj_type_snprintf(type, sizeof(type), obj, 0);
printf("%*s%s", 2*depth, "", type);
    if (obj->os_index != (unsigned) -1)
      printf("#%u", obj->os_index);
    hwloc_obj_attr_snprintf(attr, sizeof(attr), obj, " ", 0);
    if (*attr)
      printf("(%s)", attr);
    printf("\n");
    for (i = 0; i < obj->arity; i++) {
        print_children(topology, obj->children[i], depth + 1);
int main (void)
    int depth;
    unsigned i, n;
    unsigned long size;
    int levels:
    char string[128];
    int topodepth;
    void *m;
    hwloc_topology_t topology;
    hwloc_cpuset_t cpuset;
    hwloc obi t obi:
    /* Allocate and initialize topology object. */
    hwloc_topology_init(&topology);
    /\star ... Optionally, put detection configuration here to ignore
       some objects types, define a synthetic topology, etc..
       The default is to detect all the objects of the machine that
       the caller is allowed to access. See Configure Topology
       Detection. */
    /* Perform the topology detection. */
```

```
hwloc_topology_load(topology);
/* Optionally, get some additional topology information
  in case we need the topology depth later. \star/
topodepth = hwloc_topology_get_depth(topology);
/***********
* First example:
* Walk the topology with an array style, from level 0 (always * the system level) to the lowest level (always the proc level).
 ************************
for (depth = 0; depth < topodepth; depth++) {    printf("*** Objects at level %d\n", depth);
   for (i = 0; i < hwloc_get_nbobjs_by_depth(topology, depth);</pre>
        i++) {
       hwloc_obj_type_snprintf(string, sizeof(string),
                             hwloc_get_obj_by_depth(topology, depth, i), 0);
       printf("Index %u: %s\n", i, string);
   1
* Second example:
 \star Walk the topology with a tree style.
 *********
printf("*** Printing overall tree\n");
* Third example:
 * Print the number of packages.
 ************************
depth = hwloc_get_type_depth(topology, HWLOC_OBJ_PACKAGE);
if (depth == HWLOC_TYPE_DEPTH_UNKNOWN) {
   printf("*** The number of packages is unknown\n");
} else {
  printf("*** %u package(s)\n",
         hwloc_get_nbobjs_by_depth(topology, depth));
* Fourth example:
 * Compute the amount of cache that the first logical processor
 *******************
levels = 0:
size = 0:
for (obj = hwloc_get_obj_by_type(topology, HWLOC_OBJ_PU, 0);
    obj;
    obj = obj->parent)
 if (hwloc_obj_type_is_cache(obj->type)) {
   levels++;
   size += obj->attr->cache.size;
printf("*** Logical processor 0 has %d caches totaling %luKB\n",
     levels, size / 1024);
/****************
* Fifth example:
\star Bind to only one thread of the last core of the machine.
* First find out where cores are, or else smaller sets of CPUs if
 * the OS doesn't have the notion of a "core".
 *************************
depth = hwloc_get_type_or_below_depth(topology, HWLOC_OBJ_CORE);
/* Get last core. */
obj = hwloc_get_obj_by_depth(topology, depth,
             hwloc_get_nbobjs_by_depth(topology, depth) - 1);
if (obj) {
   /\star Get a copy of its cpuset that we may modify. \star/
   cpuset = hwloc_bitmap_dup(obj->cpuset);
   /\star Get only one logical processor (in case the core is
     SMT/hyper-threaded). */
   hwloc_bitmap_singlify(cpuset);
   /* And try to bind ourself there. */
   if (hwloc_set_cpubind(topology, cpuset, 0)) {
       char *str;
       int error = errno;
       hwloc_bitmap_asprintf(&str, obj->cpuset);
printf("Couldn't bind to cpuset %s: %s\n", str, strerror(error));
       free(str);
    /* Free our cpuset copy */
   hwloc_bitmap_free(cpuset);
/*******************
* Sixth example:
 * Allocate some memory on the last NUMA node, bind some existing
 * memory to the last NUMA node.
 /\star Get last node. There's always at least one. \star/
n = hwloc_get_nbobjs_by_type(topology, HWLOC_OBJ_NUMANODE);
obj = hwloc_get_obj_by_type(topology, HWLOC_OBJ_NUMANODE, n - 1);
```

hwloc provides a pkg-config executable to obtain relevant compiler and linker flags. For example, it can be used thusly to compile applications that utilize the hwloc library (assuming GNU Make):

On a machine 2 processor packages – each package of which has two processing cores – the output from running hwloc-hello could be something like the following:

```
shell$ ./hwloc-hello
*** Objects at level 0
Index 0: Machine
*** Objects at level 1
Index 0: Package#0
Index 1: Package#1
*** Objects at level 2
Index 0: Core#0
Index 1: Core#1
Index 2: Core#3
Index 3: Core#2
*** Objects at level 3
Index 0: PU#0
Index 1: PU#1
Index 2: PU#2
Index 3: PU#3
*** Printing overall tree
Machine
  Package#0
   Core#0
      PU#0
    Core#1
     PU#1
  Package#1
    Core#3
     PII#2
    Core#2
     PU#3
*** 2 package(s)
*** Logical processor 0 has 0 caches totaling OKB
shell$
```

2.5 History / Credits

hwloc is the evolution and merger of the libtopology project and the Portable Linux Processor Affinity (PLPA) (https://www.open-mpi.org/projects/plpa/) project. Because of functional and ideological overlap, these two code bases and ideas were merged and released under the name "hwloc" as an Open MPI sub-project. libtopology was initially developed by the Inria Runtime Team-Project. PLPA was initially developed by the Open MPI development team as a sub-project. Both are now deprecated in favor of hwloc, which is distributed as an Open MPI sub-project.

2.6 Further Reading

The documentation chapters include

2.6 Further Reading

- · Terms and Definitions
- Command-Line Tools
- Environment Variables
- · CPU and Memory Binding Overview
- I/O Devices
- · Miscellaneous objects
- Object attributes
- Topology Attributes: Distances, Memory Attributes and CPU Kinds
- Importing and exporting topologies from/to XML files
- Synthetic topologies
- Interoperability With Other Software
- Thread Safety
- · Components and plugins
- Embedding hwloc in Other Software
- Frequently Asked Questions
- Upgrading to the hwloc 2.0 API

Make sure to have had a look at those too!

Terms and Definitions

3.1 Objects

Object Interesting kind of part of the system, such as a Core, a L2Cache, a NUMA memory node, etc. The different types detected by hwloc are detailed in the hwloc_obj_type_t enumeration.

There are four kinds of Objects: Memory (NUMA nodes and Memory-side caches), I/O (Bridges, PCI and OS devices), Misc, and Normal (everything else, including Machine, Package, Die, Core, PU, CPU Caches, etc.). Normal and Memory objects have (non-NULL) CPU sets and nodesets, while I/O and Misc don't.

Objects are topologically sorted by locality (CPU and node sets) into a tree (see Hierarchy, Tree and Levels).

- **Processing Unit (PU)** The smallest processing element that can be represented by a hwloc object. It may be a single-core processor, a core of a multicore processor, or a single thread in a SMT processor (also sometimes called "Logical processor", not to be confused with "Logical index of a processor"). hwloc's PU acronym stands for Processing Unit.
- **Package** A processor Package is the physical package that usually gets inserted into a socket on the motherboard. It is also often called a physical processor or a CPU even if these names bring confusion with respect to cores and processing units. A processor package usually contains multiple cores (and may also be composed of multiple dies). hwloc Package objects were called Sockets up to hwloc 1.10.
- **NUMA Node** An object that contains memory that is directly and byte-accessible to the host processors. It is usually close to some cores as specified by its CPU set. Hence it is attached as a memory child of the object that groups those cores together, for instance a Package objects with 4 Core children (see Hierarchy, Tree and Levels).
- Memory-side Cache A cache in front of a specific memory region (e.g. a range of physical addresses). It caches all accesses to that region without caring about which core issued the request. This is the opposite of usual CPU caches where only accesses from the local cores are cached, without caring about the target memory. In hwloc, memory-side caches are memory objects placed between their local CPU objects (parent) and the target NUMA node memory (child).

3.2 Indexes and Sets

- OS or physical index The index that the operating system (OS) uses to identify the object. This may be completely arbitrary, non-unique, non-contiguous, not representative of logical proximity, and may depend on the BIOS configuration. That is why hwloc almost never uses them, only in the default Istopo output (P # x) and cpuset masks. See also Should I use logical or physical/OS indexes? and how?.
- Logical index Index to uniquely identify objects of the same type and depth, automatically computed by hwloc according to the topology. It expresses logical proximity in a generic way, i.e. objects which have adjacent logical indexes are adjacent in the topology. That is why hwloc almost always uses it in its API, since it expresses logical proximity. They can be shown (as L#x) by lstopo thanks to the -l option. This index is always linear and in the range [0, num_objs_same_type_same_level-1]. Think of it as ``cousin rank." The ordering is based on topology first, and then on OS CPU numbers, so it is stable across everything except

14 Terms and Definitions

firmware CPU renumbering. "Logical index" should not be confused with "Logical processor". A "Logical processor" (which in hwloc we rather call "processing unit" to avoid the confusion) has both a physical index (as chosen arbitrarily by BIOS/OS) and a logical index (as computed according to logical proximity by hwloc). See also Should I use logical or physical/OS indexes? and how?.

- **CPU set** The set of processing units (PU) logically included in an object (if it makes sense). They are always expressed using physical processor numbers (as announced by the OS). They are implemented as the hwloc_bitmap_t opaque structure. hwloc CPU sets are just masks, they do *not* have any relation with an operating system actual binding notion like Linux' cpusets. I/O and Misc objects do not have CPU sets while all Normal and Memory objects have non-NULL CPU sets.
- Node set The set of NUMA memory nodes logically included in an object (if it makes sense). They are always expressed using physical node numbers (as announced by the OS). They are implemented with the hwloc_bitmap_t opaque structure. as bitmaps. I/O and Misc objects do not have Node sets while all Normal and Memory objects have non-NULL nodesets.
- **Bitmap** A possibly-infinite set of bits used for describing sets of objects such as CPUs (CPU sets) or memory nodes (Node sets). They are implemented with the https://hww.nodes.node

3.3 Hierarchy, Tree and Levels


- **Parent object** The object logically containing the current object, for example because its CPU set includes the CPU set of the current object. All objects have a non-NULL parent, except the root of the topology (Machine object).
- Ancestor object The parent object, or its own parent, and so on.
- **Children object(s)** The object (or objects) contained in the current object because their CPU set is included in the CPU set of the current object. Each object may also contain separated lists for Memory, I/O and Misc object children.
- Arity The number of normal children of an object. There are also specific arities for Memory, I/O and Misc children.
- **Sibling objects** Objects in the same children list, which all of them are normal children of the same parent, or all of them are Memory children of the same parent, or I/O children, or Misc. They usually have the same type (and hence are cousins, as well). But they may not if the topology is asymmetric.
- **Sibling rank** Index to uniquely identify objects which have the same parent, and is always in the range [0, arity-1] (respectively memory_arity, io_arity or misc_arity for Memory, I/O and Misc children of a parent).
- **Cousin objects** Objects of the same type (and depth) as the current object, even if they do not have the same parent.
- **Level** Set of objects of the same type and depth. All these objects are cousins.
 - Memory, I/O and Misc objects also have their own specific levels and (virtual) depth.
- **Depth** Nesting level in the object tree, starting from the root object. If the topology is symmetric, the depth of a child is equal to the parent depth plus one, and an object depth is also equal to the number of parent/child links between the root object and the given object. If the topology is asymmetric, the difference between some parent and child depths may be larger than one when some intermediate levels (for instance groups) are missing in only some parts of the machine.
 - The depth of the Machine object is always 0 since it is always the root of the topology. The depth of PU objects is equal to the number of levels in the topology minus one.
 - Memory, I/O and Misc objects also have their own specific levels and depth.

The following diagram can help to understand the vocabulary of the relationships by showing the example of a machine with two dual core packages (with no hardware threads); thus, a topology with 5 levels. Each box with rounded corner corresponds to one hwloc_obj_t, containing the values of the different integer fields (depth, logical—index, etc.), and arrows show to which other hwloc_obj_t pointers point to (first_child, parent, etc.).

The topology always starts with a Machine object as root (depth 0) and ends with PU objects at the bottom (depth 4 here).

Objects of the same level (cousins) are listed in red boxes and linked with red arrows. Children of the same parent (siblings) are linked with blue arrows.

The L2 cache of the last core is intentionally missing to show how asymmetric topologies are handled. See What happens if my topology is asymmetric? for more information about such strange topologies.

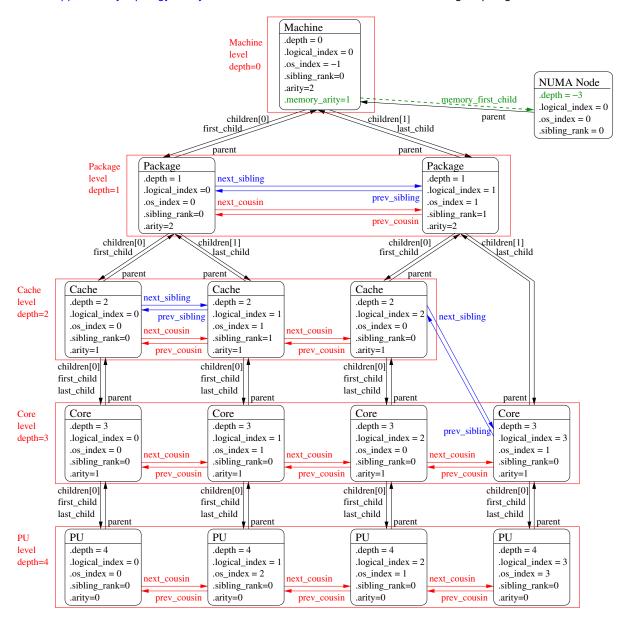

It should be noted that for PU objects, the logical index – as computed linearly by hwloc – is not the same as the OS index.

The NUMA node is on the side because it is not part of the main tree but rather attached to the object that corresponds to its locality (the entire machine here, hence the root object). It is attached as a *Memory* child (in green) and has a virtual depth (negative). It could also have siblings if there were multiple local NUMA nodes, or cousins if other NUMA nodes were attached somewhere else in the machine.

I/O or Misc objects could be attached in a similar manner.

16 Terms and Definitions

Command-Line Tools

hwloc comes with an extensive C programming interface and several command line utilities. Each of them is fully documented in its own manual page; the following is a summary of the available command line tools.

4.1 Istopo and Istopo-no-graphics

Istopo (also known as hwloc-ls) displays the hierarchical topology map of the current system. The output may be graphical, ascii-art or textual, and can also be exported to numerous file formats such as PDF, PNG, XML, and others. Advanced graphical outputs require the "Cairo" development package (usually cairo-devel or libcairo2-dev).

Istopo and Istopo-no-graphics accept the same command-line options. However, graphical outputs are only available in Istopo. Textual outputs (those that do not depend on heavy external libraries such as Cairo) are supported in both Istopo and Istopo-no-graphics.

This command can also display the processes currently bound to a part of the machine (via the --ps option). Note that Istopo can read XML files and/or alternate chroot filesystems and display topological maps representing those systems (e.g., use Istopo to output an XML file on one system, and then use Istopo to read in that XML file and display it on a different system).

4.2 hwloc-bind

hwloc-bind binds processes to specific hardware objects through a flexible syntax. A simple example is binding an executable to specific cores (or packages or bitmaps or ...). The hwloc-bind(1) man page provides much more detail on what is possible.

hwloc-bind can also be used to retrieve the current process' binding, or retrieve the last CPU(s) where a process ran, or operate on memory binding.

Just like hwloc-calc, the input locations given to hwloc-bind may be either objects or cpusets (bitmaps as reported by hwloc-calc or hwloc-distrib).

4.3 hwloc-calc

hwloc-calc is hwloc's Swiss Army Knife command-line tool for converting things. The input may be either objects or cpusets (bitmaps as reported by another hwloc-calc instance or by hwloc-distrib), that may be combined by addition, intersection or subtraction. The output kinds include:

- a cpuset bitmap: This compact opaque representation of objects is useful for shell scripts etc. It may passed
 to hwloc command-line tools such as hwloc-calc or hwloc-bind, or to hwloc command-line options such as
 lstopo --restrict.
- the amount of the equivalent hwloc objects from a specific type, or the list of their indexes. This is useful for iterating over all similar objects (for instance all cores) within a given part of a platform.
- a hierarchical description of objects, for instance a thread index within a core within a package. This gives a better view of the actual location of an object.

18 Command-Line Tools

Moreover, input and/or output may be use either physical/OS object indexes or as hwloc's logical object indexes. It eases cooperation with external tools such as taskset or numactl by exporting hwloc specifications into list of processor or NUMA node physical indexes. See also Should I use logical or physical/OS indexes? and how?.

4.4 hwloc-info

hwloc-info dumps information about the given objects, as well as all its specific attributes. It is intended to be used with tools such as grep for filtering certain attribute lines. When no object is specified, or when --topology is passed, hwloc-info prints a summary of the topology. When --support is passed, hwloc-info lists the supported features for the topology.

4.5 hwloc-distrib

hwloc-distrib generates a set of cpuset bitmaps that are uniformly distributed across the machine for the given number of processes. These strings may be used with hwloc-bind to run processes to maximize their memory bandwidth by properly distributing them across the machine.

4.6 hwloc-ps

hwloc-ps is a tool to display the bindings of processes that are currently running on the local machine. By default, hwloc-ps only lists processes that are bound; unbound process (and Linux kernel threads) are not displayed.

4.7 hwloc-annotate

hwloc-annotate may modify object (and topology) attributes such as string information (see Custom string infos for details) or Misc children objects. It may also add distances, memory attributes, etc. to the topology. It reads an input topology from a XML file and outputs the annotated topology as another XML file.

4.8 hwloc-diff, hwloc-patch and hwloc-compress-dir

hwloc-diff computes the difference between two topologies and outputs it to another XML file.

hwloc-patch reads such a difference file and applies to another topology.

hwloc-compress-dir compresses an entire directory of XML files by using hwloc-diff to save the differences between topologies instead of entire topologies.

4.9 hwloc-dump-hwdata

hwloc-dump-hwdata is a Linux and x86-specific tool that dumps (during boot, privileged) some topology and locality information from raw hardware files (SMBIOS and ACPI tables) to human-readable and world-accessible files that the hwloc library will later reuse.

Currently only used on Intel Xeon Phi processor platforms. See Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor platforms. See HWLOC_DUMPED_HWDATA_DIR in Environment Variables for details about the location of dumped files.

4.10 hwloc-gather-topology and hwloc-gather-cpuid

hwloc-gather-topology is a Linux-specific tool that saves the relevant topology files of the current machine into a tarball (and the corresponding Istopo outputs).

hwloc-gather-cpuid is a x86-specific tool that dumps the result of CPUID instructions on the current machine into a directory.

The output of hwloc-gather-cpuid is included in the tarball saved by hwloc-gather-topology when running on Linux/x86.

These files may be used later (possibly offline) for simulating or debugging a machine without actually running on it.

Environment Variables

The behavior of the hwloc library and tools may be tuned thanks to the following environment variables.

- HWLOC_XMLFILE=/path/to/file.xml enforces the discovery from the given XML file as if hwloc_topology_set_xml() had been called. This file may have been generated earlier with Istopo file.xml. For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, HWLOC_THISSYSTEM should be set 1 in the environment too, to assert that the loaded file is really the underlying system. See also Importing and exporting topologies from/to XML files.
- **HWLOC_SYNTHETIC=synthetic_description** enforces the discovery through a synthetic description string as if hwloc_topology_set_synthetic() had been called. For convenience, this backend provides empty binding hooks which just return success. See also <a href="https://synthetic.com/synth

HWLOC_XML_VERBOSE=1

- HWLOC_SYNTHETIC_VERBOSE=1 enables verbose messages in the XML or synthetic topology backends. hwloc XML backends (see Importing and exporting topologies from/to XML files) can emit some error messages to the error output stream. Enabling these verbose messages within hwloc can be useful for understanding failures to parse input XML topologies. Similarly, enabling verbose messages in the synthetic topology backend can help understand why the description string is invalid. See also Synthetic topologies.
- HWLOC_THISSYSTEM=1 enforces the return value of hwloc_topology_is_thissystem(), as if HWLOC_TOPOLOGY_FLAG_IS_THIS was set with hwloc_topology_set_flags(). It means that it makes hwloc assume that the selected backend provides the topology for the system on which we are running, even if it is not the OS-specific backend but the XML backend for instance. This means making the binding functions actually call the OS-specific system calls and really do binding, while the XML backend would otherwise provide empty hooks just returning success. This can be used for efficiency reasons to first detect the topology once, save it to a XML file, and quickly reload it later through the XML backend, but still having binding functions actually do bind. This also enables support for the variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES.
- HWLOC_THISSYSTEM_ALLOWED_RESOURCES=1 Get the set of allowed resources from the native operating system even if the topology was loaded from XML or synthetic description, as if HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES was set with hwloc_topology_set_flags(). This variable requires the topology to match the current system (see the variable HWLOC_THISSYSTEM). This is useful when the topology is not loaded directly from the local machine (e.g. for performance reason) and it comes with all resources, but the running process is restricted to only a part of the machine (for instance because of Linux Cgroup/Cpuset).
- **HWLOC_ALLOW=all** Totally ignore administrative restrictions such as Linux Cgroups and consider all resources (PUs and NUMA nodes) as allowed. This is different from setting HWLOC_TOPOLOGY_FLAG_INCLUDE ← __DISALLOWED which gathers all resources but marks the unavailable ones as disallowed.
- **HWLOC_HIDE_ERRORS=1** enables or disables verbose reporting of errors. The hwloc library may issue warnings to the standard error stream when it detects a problem during topology discovery, for instance if the operating system (or user) gives contradictory topology information.
 - By default (1), hwloc only shows critical errors such as invalid hardware topology information or invalid configuration. If set to 0 (default in Istopo), more errors are displayed, for instance a failure to initialize CUDA or NVML. If set to 2, no hwloc error messages are shown.

20 Environment Variables

Note that additional verbose messages may be enabled with other variables such as HWLOC_GROUPING ∨ VERBOSE.

- HWLOC_USE_NUMA_DISTANCES=7 enables or disables the use of NUMA distances. NUMA distances and memory target/initiator information may be used to improve the locality of NUMA nodes, especially CPU-less nodes. Bits in the value of this environment variable enable different features: Bit 0 enables the gathering of NUMA distances from the operating system. Bit 1 further enables the use of NUMA distances to improve the locality of CPU-less nodes. Bit 2 enables the use of target/initiator information.
- HWLOC_GROUPING=1 enables or disables objects grouping based on distances. By default, hwloc uses distance matrices between objects (either read from the OS or given by the user) to find groups of close objects. These groups are described by adding intermediate Group objects in the topology. Setting this environment variable to 0 will disable this grouping. This variable supersedes the obsolete HWLOC_IGNORE_← DISTANCES variable.
- HWLOC_GROUPING_ACCURACY=0.05 relaxes distance comparison during grouping. By default, objects may be grouped if their distances form a minimal distance graph. When setting this variable to 0.02, and when HWLOC_DISTANCES_ADD_FLAG_GROUP_INACCURATE is given, these distances do not have to be strictly equal anymore, they may just be equal with a 2% error. If set to try instead of a numerical value, hwloc will try to group with perfect accuracy (0, the default), then with 0.01, 0.02, 0.05 and finally 0.1. Numbers given in this environment variable should always use a dot as a decimal mark (for instance 0.01 instead of 0,01).
- **HWLOC_GROUPING_VERBOSE=0** enables or disables some verbose messages during grouping. If this variable is set to 1, some debug messages will be displayed during distance-based grouping of objects even if debug was not specific at configure time. This is useful when trying to find an interesting distance grouping accuracy.
- **HWLOC_CPUKINDS_RANKING=default** change the ranking policy for CPU kinds. By default, the OS-provided efficiency is used for ranking. If not available, the frequency is used on ARM processors, or core type and frequency on other architectures.

This environment variable may be set to coretype+frequency, coretype, frequency, frequency_base, frequency_max, forced_efficiency, no_forced_efficiency, default, or none.

HWLOC_PCI_LOCALITY=<domain/bus> <cpuset>;...

HWLOC_PCI_LOCALITY=/path/to/pci/locality/file changes the locality of I/O devices behing the specified PCI buses. If no I/O locality information is available or if the BIOS reports incorrect information, it is possible to move a I/O device tree (OS and/or PCI devices with optional bridges) near a custom set of processors. Localities are given either inside the environment variable itself, or in the pointed file. They may be separated either by semi-colons or by line-breaks.

Each locality contains a domain/bus specification (in hexadecimal numbers as usual) followed by a whitespace and a cpuset:

- 0001 <cpuset> specifies the locality of all buses in PCI domain 0000.
- 0000:0f <cpuset> specifies only PCI bus 0f in domain 0000.
- 0002:04-0a <puset> specifies a range of buses (from 04 to 0a) within domain 0002.

Domain/bus specifications should usually match entire hierarchies of buses behind a bridge (including primary, secondary and subordinate buses). For instance, if hostbridge 0000:00 is above other bridges/switches with buses 0000:01 to 0000:09, the variable should be HWLOC_PCI_LOCALITY="0000:00-09 <cpuset>". It supersedes the old HWLOC_PCI_0000_00_LOCALCPUS=<cpuset> which only works when hostbridges exist in the topology.

If the variable is defined to empty or invalid, no forced PCI locality is applied but hwloc's internal automatic locality quirks are disabled, which means the exact PCI locality reported by the platform is used.

HWLOC_X86_TOPOEXT_NUMANODES=0 use AMD topoext CPUID leaf in the x86 backend to detect NUMA nodes. When using the x86 backend, setting this variable to 1 enables the building of NUMA nodes from AMD processor CPUID instructions. However this strategy does not always reflect BIOS configuration such as NUMA interleaving. And node indexes may be different from those of the operating system. Hence this should only be used when OS backends are wrong and the user is sure that CPUID returns correct NUMA information.

- HWLOC_KEEP_NVIDIA_GPU_NUMA_NODES=0 show or hide NUMA nodes that correspond to NVIDIA GPU memory. By default they are ignored to avoid interleaved memory being allocated on GPU by mistake. Setting this environment variable to 1 exposes these NUMA nodes. They may be recognized by the GPUMemory subtype. They also have a PCIBusID info attribute to identify the corresponding GPU.
- **HWLOC_KNL_MSCACHE_L3=0** Expose the KNL MCDRAM in cache mode as a Memory-side Cache instead of a L3. hwloc releases prior to 2.1 exposed the MCDRAM cache as a CPU-side L3 cache. Now that Memory-side caches are supported by hwloc, it is still exposed as a L3 by default to avoid breaking existing applications. Setting this environment variable to 1 will expose it as a proper Memory-side cache.
- HWLOC_ANNOTATE_GLOBAL_COMPONENTS=0 Allow components to annotate the topology even if they are usually excluded by global components by default. Setting this variable to 1 and also setting HWLOC_ COMPONENTS=xml, pci, stop enables the addition of PCI vendor and model info attributes to a XML topology that was generated without those names (if pciaccess was missing).
- **HWLOC_FSROOT=/path/to/linux/filesystem-root/** switches to reading the topology from the specified Linux filesystem root instead of the main file-system root. This directory may have been saved previously from another machine with hwloc-gather-topology.

One should likely also set HWLOC_COMPONENTS=linux, stop so that non-Linux backends are disabled (the -i option of command-line tools takes care of both).

Not using the main file-system root causes hwloc_topology_is_thissystem() to return 0. For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, HWLOC_THISSYSTEM should be set 1 in the environment too, to assert that the loaded file is really the underlying system.

HWLOC_CPUID_PATH=/path/to/cpuid/ forces the x86 backend to read dumped CPUIDs from the given directory instead of executing actual x86 CPUID instructions. This directory may have been saved previously from another machine with hwloc-gather-cpuid.

One should likely also set $\texttt{HWLOC_COMPONENTS} = x86$, stop so that non-x86 backends are disabled (the -i option of command-line tools takes care of both).

It causes hwloc_topology_is_thissystem() to return 0. For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, HWLOC_THISSYSTEM should be set 1 in the environment too, to assert that the loaded CPUID dump is really the underlying system.

- HWLOC_DUMPED_HWDATA_DIR=/path/to/dumped/files/ loads files dumped by hwloc-dump-hwdata (on Linux) from the given directory. The default dump/load directory is configured during build based on -- runstatedir, --localstatedir, and --prefix options. It usually points to /var/run/hwloc/ in Linux distribution packages, but it may also point to \$prefix/var/run/hwloc/ when manually installing and only specifying --prefix.
- **HWLOC_COMPONENTS=list,of,components** forces a list of components to enable or disable. Enable or disable the given comma-separated list of components (if they do not conflict with each other). Component names prefixed with are disabled (a single phase may also be disabled).

Once the end of the list is reached, hwloc falls back to enabling the remaining components (sorted by priority) that do not conflict with the already enabled ones, and unless explicitly disabled in the list. If stop is met, the enabling loop immediately stops, no more component is enabled.

If xml or synthetic components are selected, the corresponding XML filename or synthetic description string should be pass in $HWLOC_XMLFILE$ or $HWLOC_SYNTHETIC$ respectively.

Since this variable is the low-level and more generic way to select components, it takes precedence over environment variables for selecting components.

If the variable is set to an empty string (or set to a single comma), no specific component is loaded first, all components are loaded in priority order.

See Selecting which components to use for details.

- **HWLOC_COMPONENTS_VERBOSE=1** displays verbose information about components. Display messages when components are registered or enabled. This is the recommended way to list the available components with their priority (all of them are *registered* at startup).
- **HWLOC_PLUGINS_PATH=/path/to/hwloc/plugins/:...** changes the default search directory for plugins. By default, \$libdir/hwloc is used. The variable may contain several colon-separated directories.

22 Environment Variables

HWLOC_PLUGINS_VERBOSE=1 displays verbose information about plugins. List which directories are scanned, which files are loaded, and which components are successfully loaded.

- **HWLOC_PLUGINS_BLACKLIST=filename1,filename2,...** prevents plugins from being loaded if their filename (without path) is listed. Plugin filenames may be found in verbose messages outputted when HWLOC_← PLUGINS_VERBOSE=1.
- **HWLOC_DEBUG_VERBOSE=0** disables all verbose messages that are enabled by default when <code>-enable-debug</code> is passed to configure. When set to more than 1, even more verbose messages are displayed. The default is 1.

CPU and Memory Binding Overview

Some operating systems do not systematically provide separate functions for CPU and memory binding. This means that CPU binding functions may have have effects on the memory binding policy. Likewise, changing the memory binding policy may change the CPU binding of the current thread. This is often not a problem for applications, so by default hwloc will make use of these functions when they provide better binding support.

If the application does not want the CPU binding to change when changing the memory policy, it needs to use the HWLOC_MEMBIND_NOCPUBIND flag to prevent hwloc from using OS functions which would change the CPU binding. Additionally, HWLOC_CPUBIND_NOMEMBIND can be passed to CPU binding function to prevent hwloc from using OS functions would change the memory binding policy. Of course, using these flags will reduce hwloc's overall support for binding, so their use is discouraged.

One can avoid using these flags but still closely control both memory and CPU binding by allocating memory, touching each page in the allocated memory, and then changing the CPU binding. The already-really-allocated memory will then be "locked" to physical memory and will not be migrated. Thus, even if the memory binding policy gets changed by the CPU binding order, the already-allocated memory will not change with it. When binding and allocating further memory, the CPU binding should be performed again in case the memory binding altered the previously-selected CPU binding.

Not all operating systems support the notion of a "current" memory binding policy for the current process, but such operating systems often still provide a way to allocate data on a given node set. Conversely, some operating systems support the notion of a "current" memory binding policy and do not permit allocating data on a specific node set without changing the current policy and allocate the data. To provide the most powerful coverage of these facilities, hwloc provides:

- functions that set/get the current memory binding policies (if supported): hwloc_set/get_membind() and hwloc_set/get_proc_membind()
- a function that allocates memory bound to specific node set without changing the current memory binding policy (if supported): hwloc_alloc_membind().
- a helper which, if needed, changes the current memory binding policy of the process in order to obtain memory binding: hwloc alloc membind policy().

An application can thus use the two first sets of functions if it wants to manage separately the global process binding policy and directed allocation, or use the third set of functions if it does not care about the process memory binding policy.

See CPU binding and Memory binding for hwloc's API functions regarding CPU and memory binding, respectively. There are some examples under doc/examples/ in the source tree.

I/O Devices

hwloc usually manipulates processing units and memory but it can also discover I/O devices and report their locality as well. This is useful for placing I/O intensive applications on cores near the I/O devices they use, or for gathering information about all platform components.

7.1 Enabling and requirements

I/O discovery is disabled by default (except in Istopo) for performance reasons. It can be enabled by changing the filtering of I/O object types to $\verb|HWLOC_TYPE_FILTER_KEEP_IMPORTANT|$ or $\verb|HWLOC_TYPE_FILTER_KEEP_ALL|$ before loading the topology, for instance with $\verb|hwloc_topology_set_io_types_filter()|$.

Note that I/O discovery requires significant help from the operating system. The pciaccess library (the development package is usually libpciaccess-devel or libpciaccess-dev) is needed to fully detect PCI devices and bridges/switches. On Linux, PCI discovery may still be performed even if libpciaccess cannot be used. But it misses PCI device names. Moreover, some operating systems require privileges for probing PCI devices, see Does hwloc require privileged access? for details.

The actual locality of I/O devices is only currently detected on Linux. Other operating system will just report I/O devices as being attached to the topology root object.

7.2 I/O objects

When I/O discovery is enabled and supported, some additional objects are added to the topology. The corresponding I/O object types are:

- HWLOC_OBJ_OS_DEVICE describes an operating-system-specific handle such as the *sda* drive or the *eth0* network interface. See OS devices.
- HWLOC_OBJ_PCI_DEVICE and HWLOC_OBJ_BRIDGE build up a PCI hierarchy made of bridges (that may be actually be switches) and devices. See PCI devices and bridges.

Any of these types may be filtered individually with hwloc_topology_set_type_filter().

hwloc tries to attach these new objects to normal objects (usually NUMA nodes) to match their actual physical location. For instance, if a I/O hub (or root complex) is physically connected to a package, the corresponding hwloc bridge object (and its PCI bridges and devices children) is inserted as a child of the corresponding hwloc Package object. These children are not in the normal children list but rather in the I/O-specific children list.

I/O objects also have neither CPU sets nor node sets (NULL pointers) because they are not directly usable by the user applications for binding. Moreover I/O hierarchies may be highly complex (asymmetric trees of bridges). So I/O objects are placed in specific levels with custom depths. Their lists may still be traversed with regular helpers such as hwloc_get_next_obj_by_type(). However, hwloc offers some dedicated helpers such as hwloc_get_next_pcidev() and hwloc_get_next_osdev() for convenience (see Finding I/O objects).

7.3 OS devices

Although each PCI device is uniquely identified by its bus ID (e.g. 0000:01:02.3), a user-space application can hardly find out which PCI device it is actually using. Applications rather use software handles (such as the eth0

26 I/O Devices

network interface, the *sda* hard drive, or the *mlx4_0* OpenFabrics HCA). Therefore hwloc tries to add software devices (HWLOC_OBJ_OS_DEVICE, also known as OS devices).

OS devices may be attached below PCI devices, but they may also be attached directly to normal objects. Indeed some OS devices are not related to PCI. For instance, NVDIMM block devices (such as *pmem0s* on Linux) are directly attached near their NUMA node (I/O child of the parent whose memory child is the NUMA node). Also, if hwloc could not discover PCI for some reason, PCI-related OS devices may also be attached directly to normal objects.

hwloc first tries to discover OS devices from the operating system, e.g. *eth0*, *sda* or *mlx4_0*. However, this ability is currently only available on Linux for some classes of devices.

hwloc then tries to discover software devices through additional I/O components using external libraries. For instance proprietary graphics drivers do not expose any named OS device, but hwloc may still create one OS object per software handle when supported. For instance the opencl and cuda components may add some opencl0d0 and cuda0 OS device objects.

Here is a list of OS device objects commonly created by hwloc components when I/O discovery is enabled and supported.

- Hard disks or non-volatile memory devices (HWLOC OBJ OSDEV BLOCK)
 - sda or dax2.0 (Linux component)
- Network interfaces (HWLOC OBJ OSDEV NETWORK)
 - eth0, wlan0, ib0 (Linux component)
- OpenFabrics (InfiniBand, Omni-Path, usNIC, etc) HCAs (HWLOC OBJ OSDEV OPENFABRICS)
 - mlx5_0, hfi1_0, qib0, usnic_0 (Linux component)
- GPUs (HWLOC_OBJ_OSDEV_GPU)
 - rsmi0 for the first RSMI device ("RSMI" subtype, from the RSMI component, using the AMD ROCm SMI library)
 - ze0 for the first Level Zero device ("LevelZero" subtype, from the levelzero component, using the oneAPI Level Zero library)
 - nvml0 for the first NVML device ("NVML" subtype, from the NVML component, using the NVIDIA Management Library)
 - :0.0 for the first display ("Display" subtype, from the GL component, using the NV-CONTROL X extension library, NVCtrl)
 - card0 and renderD128 for DRM device files (from the Linux component, filtered-out by default because considered non-important)
- Co-Processors (HWLOC OBJ OSDEV COPROC)
 - opencl0d0 for the first device of the first OpenCL platform, opencl1d3 for the fourth device of the second
 OpenCL platform ("OpenCL" subtype, from the OpenCL component)
 - cuda0 for the first NVIDIA CUDA device ("CUDA" subtype, from the CUDA component, using the NVIDIA CUDA Library)
 - ve0 for the first NEC Vector Engine device ("VectorEngine" subtype, from the Linux component)
- DMA engine channel (HWLOC OBJ OSDEV DMA)
 - dma0chan0 (Linux component) when all OS devices are enabled (HWLOC TYPE FILTER KEEP ALL)

Note that some PCI devices may contain multiple software devices (see the example below).

See also Interoperability With Other Software for managing these devices without considering them as hwloc objects.

7.4 PCI devices and bridges

A PCI hierarchy is usually organized as follows: A hostbridge object (<code>HWLOC_OBJ_BRIDGE</code> object with upstream type <code>Host</code> and downstream type <code>PCI</code>) is attached below a normal object (usually the entire machine or a NUMA node). There may be multiple hostbridges in the machine, attached to different places, but all PCI devices are below one of them (unless the Bridge object type is filtered-out).

Each hostbridge contains one or several children, either other bridges (usually PCI to PCI switches) or PCI devices (HWLOC_OBJ_PCI_DEVICE). The number of bridges between the hostbridge and a PCI device depends on the machine.

7.5 Consulting I/O devices and binding

I/O devices may be consulted by traversing the topology manually (with usual routines such as hwloc_get_obj_by_type()) or by using dedicated helpers (such as hwloc_get_pcidev_by_busid(), see Finding I/O objects).

I/O objects do not actually contain any locality information because their CPU sets and node sets are NULL. Their locality must be retrieved by walking up the object tree (through the parent link) until a non-I/O object is found (see hwloc_get_non_io_ancestor_obj()). This normal object should have non-NULL CPU sets and node sets which describe the processing units and memory that are immediately close to the I/O device. For instance the path from a OS device to its locality may go across a PCI device parent, one or several bridges, up to a Package node with the same locality.

Command-line tools are also aware of I/O devices. Istopo displays the interesting ones by default (passing --no-io disables it).

hwloc-calc and hwloc-bind may manipulate I/O devices specified by PCI bus ID or by OS device name.


- pci=0000:02:03.0 is replaced by the set of CPUs that are close to the PCI device whose bus ID is given.
- os=eth0 is replaced by CPUs that are close to the I/O device whose software handle is called eth0.

This enables easy binding of I/O-intensive applications near the device they use.

7.6 Examples

The following picture shows a dual-package dual-core host whose PCI bus is connected to the first package and NUMA node.

28 I/O Devices

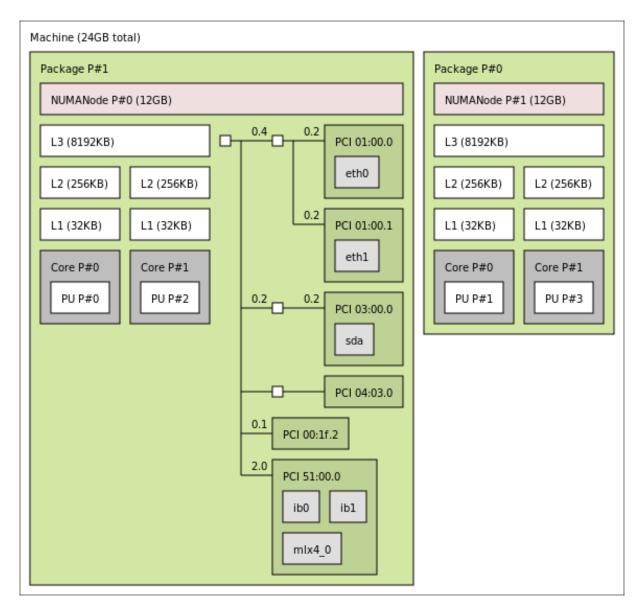

Six interesting PCI devices were discovered. However, hwloc found some corresponding software devices (*eth0*, *eth1*, *sda*, *mlx4_0*, *ib0*, and *ib1*) for only four of these physical devices. The other ones (*PCI 102b:0532* and *PCI 8086:3a20*) are an unused IDE controller (no disk attached) and a graphic card (no corresponding software device reported to the user by the operating system).

On the contrary, it should be noted that three different software devices were found for the last PCI device (*PCI* 15b3:634a). Indeed this OpenFabrics HCA PCI device object contains one one OpenFabrics software device (*mlx4_0*) and two virtual network interface software devices (*ib0* and *ib1*). Here is the corresponding textual output:

```
Machine (24GB total)
  Package L#0
    NUMANode L#0 (P#0 12GB)
    L3 L#0 (8192KB)
      L2 L\#0 (256KB) + L1 L\#0 (32KB) + Core L\#0 + PU L\#0 (P\#0)
      L2 L#1 (256KB) + L1 L#1 (32KB) + Core L#1 + PU L#1 (P#2)
    HostBridge
      PCIBridge
        PCI 01:00.0 (Ethernet)
          Net "eth0"
        PCI 01:00.1 (Ethernet)
         Net "eth1"
      PCIBridge
        PCI 03:00.0 (RAID)
          Block "sda"
      PCIBridge
```

7.6 Examples 29

```
PCI 04:03.0 (VGA)
PCI 00:1f.2 (IDE)
PCI 51:00.0 (InfiniBand)
Net "ib0"
Net "ib1"
Net "mlx4_0"

Package L#1

NUMANode L#1 (P#1 12GB)
L3 L#1 (8192KB)
L2 L#2 (256KB) + L1 L#2 (32KB) + Core L#2 + PU L#2 (P#1)
L2 L#3 (256KB) + L1 L#3 (32KB) + Core L#3 + PU L#3 (P#3)
```

30 I/O Devices

Miscellaneous objects

hwloc topologies may be annotated with Misc objects (of type HWLOC_OBJ_MISC) either automatically or by the user. This is a flexible way to annotate topologies with large sets of information since Misc objects may be inserted anywhere in the topology (to annotate specific objects or parts of the topology), even below other Misc objects, and each of them may contain multiple attributes (see also How do I annotate the topology with private notes?). These Misc objects may have a subtype field to replace Misc with something else in the Istopo output.

8.1 Misc objects added by hwloc

hwloc only uses Misc objects when other object types are not sufficient, and when the Misc object type is not filtered-out anymore. This currently includes:

- Memory modules (DIMMs), on Linux when privileged and when dmi-sysfs is supported by the kernel. These objects have a subtype field of value MemoryModule. They are currently always attached to the root object. Their attributes describe the DIMM vendor, model, etc. lstopo -v displays them as:

 Misc (MemoryModule) (P#1 DeviceLocation="Bottom-Slot 2 (right)" BankLocation="BANK 2" Vendor=Elpida SerialNumber=21733667 AssetTag=9876543210 PartNumber="EBJ81UG8EFUO-GN-F")
- Displaying process binding in lstopo —-top. These objects have a subtype field of value Process and a name attribute made of their PID and program name. They are attached below the object they are bound to. The textual lstopo displays them as:

 PU L#0 (P#0)

 Misc (Process) 4445 myprogram

8.2 Annotating topologies with Misc objects

The user may annotate hwloc topologies with its own Misc objects. This can be achieved with hwloc_topology_insert_misc_ as well as hwloc-annotate command-line tool.

Object attributes

9.1 Normal attributes

hwloc objects have many generic attributes in the hwloc_obj structure, for instance their logical_index or os_index (see Should I use logical or physical/OS indexes? and how?), depth or name.

The kind of object is first described by the obj->type generic attribute (an integer). OS devices also have a specific obj->attr->osdev.type integer for distinguishing between NICs, GPUs, etc. Objects may also have an optional obj->subtype pointing to a better description string. For instance subtype is useful to say what Group objects are actually made of (e.g. *Book* for Linux S/390 books). It may also specify that a Block OS device is a *Disk*, or that a CoProcessor OS device is a *CUDA* device. This subtype is displayed by Istopo either in place or after the main obj->type attribute. NUMA nodes that correspond GPU memory may also have *GPUMemory* as subtype.

Each object also contains an attr field that, if non NULL, points to a union hwloc_obj_attr_u of type-specific attribute structures. For instance, a L2Cache object obj contains cache-specific information in obj->attr->cache, such as its size and associativity, cache type. See hwloc_obj_attr_u for details.

9.2 Custom string infos

Aside os these generic attribute fields, hwloc annotates many objects with string attributes that are made of a key and a value. Each object contains a list of such pairs that may be consulted manually (looking at the object infos array field) or using the hwloc_obj_get_info_by_name(). The user may additionally add new key-value pairs to any object using hwloc_obj_add_info() or the hwloc-annotate program.

Here is a non-exhaustive list of attributes that may be automatically added by hwloc. Note that these attributes heavily depend on the ability of the operating system to report them. Many of them will therefore be missing on some OS.

9.2.1 Hardware Platform Information

These info attributes are attached to the root object (Machine).

PlatformName, PlatformModel, PlatformVendor, PlatformBoardID, PlatformRevision,

SystemVersionRegister, ProcessorVersionRegister (Machine) Some POWER/PowerPC-specific attributes describing the platform and processor. Currently only available on Linux. Usually added to Package objects, but can be in Machine instead if hwloc failed to discover any package.

DMIBoardVendor, DMIBoardName, etc. DMI hardware information such as the motherboard and chassis models and vendors, the BIOS revision, etc., as reported by Linux under /sys/class/dmi/id/.

MemoryMode, ClusterMode Intel Xeon Phi processor configuration modes. Available if hwloc-dump-hwdata was used (see Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?) or if hwloc managed to guess them from the NUMA configuration.

The memory mode may be *Cache*, *Flat*, *Hybrid50* (half the MCDRAM is used as a cache) or *Hybrid25* (25% of MCDRAM as cache). The cluster mode may be *Quadrant*, *Hemisphere*, *All2All*, *SNC2* or *SNC4*. See doc/examples/get-knl-modes.c in the source directory for an example of retrieving these attributes.

34 Object attributes

9.2.2 Operating System Information

These info attributes are attached to the root object (Machine).

OSName, OSRelease, OSVersion, HostName, Architecture The operating system name, release, version, the hostname and the architecture name, as reported by the Unix uname command.

LinuxCgroup The name the Linux control group where the calling process is placed.

WindowsBuildEnvironment Either MinGW or Cygwin when one of these environments was used during build.

9.2.3 hwloc Information

Unless specified, these info attributes are attached to the root object (Machine).

Backend (topology root, or specific object added by that backend) The name of the hwloc backend/component that filled the topology. If several components were combined, multiple Backend keys may exist, with different values, for instance x86 and Linux in the root object and CUDA in CUDA OS device objects.

SyntheticDescription The description string that was given to hwloc to build this synthetic topology.

hwlocVersion The version number of the hwloc library that was used to generate the topology. If the topology was loaded from XML, this is not the hwloc version that loaded it, but rather the first hwloc instance that exported the topology to XML earlier.

ProcessName The name of the process that contains the hwloc library that was used to generate the topology. If the topology was from XML, this is not the hwloc process that loaded it, but rather the first process that exported the topology to XML earlier.

9.2.4 CPU Information

These info attributes are attached to Package objects, or to the root object (Machine) if package locality information is missing.

CPUModel The processor model name.

CPUVendor, CPUModelNumber, CPUFamilyNumber, CPUStepping The processor vendor name, model number, family number, and stepping number. Currently available for x86 and Xeon Phi processors on most systems, and for ia64 processors on Linux (except CPUStepping).

CPURevision A POWER/PowerPC-specific general processor revision number, currently only available on Linux.

CPUType A Solaris-specific general processor type name, such as "i86pc".

9.2.5 OS Device Information

These info attributes are attached to OS device objects specified in parentheses.

Vendor, Model, Revision, SerialNumber, Size, SectorSize (Block OS devices) The vendor and model names, revision, serial number, size (in kB) and SectorSize (in bytes).

LinuxDeviceID (Block OS devices) The major/minor device number such as 8:0 of Linux device.

GPUVendor, GPUModel (GPU or Co-Processor OS devices) The vendor and model names of the GPU device.

OpenCLDeviceType, OpenCLPlatformIndex,

OpenCLPlatformName, OpenCLPlatformDeviceIndex (OpenCL OS devices) The type of OpenCL device, the OpenCL platform index and name, and the index of the device within the platform.

OpenCLComputeUnits, OpenCLGlobalMemorySize (OpenCL OS devices) The number of compute units and global memory size (in kB) of an OpenCL device.

LevelZeroVendor, LevelZeroModel, LevelZeroBrand,

- **LevelZeroSerialNumber, LevelZeroBoardNumber (LevelZero OS devices)** The name of the vendor, device mode, brand of a Level Zero device, and its serial and board numbers.
- **LevelZeroDriverIndex**, **LevelZeroDriverDeviceIndex** (**LevelZero OS devices**) The index of the Level Zero driver within the list of drivers, and the index of the device within the list of devices managed by this driver.
- **LevelZeroCQGroups, LevelZeroCQGroup2 (LevelZero OS devices)** The number of completion queue groups, and the description of the third group (as N*0xX where N is the number of queues in the group, and 0xX is the hexadecimal bitmask of ze_command_queue_group_property_flag_t listing properties of those queues).
- AMDUUID, AMDSerial (RSMI GPU OS devices) The UUID and serial number of AMD GPUs.
- XGMIHiveID (RSMI GPU OS devices) The ID of the group of GPUs (Hive) interconnected by XGMI links
- **XGMIPeers (RSMI GPU OS devices)** The list of RSMI OS devices that are directly connected to the current device through XGMI links. They are given as a space-separated list of object names, for instance *rsmi2 rsmi3*.
- NVIDIAUUID, NVIDIASerial (NVML GPU OS devices) The UUID and serial number of NVIDIA GPUs.
- CUDAMultiProcessors, CUDACoresPerMP,
- **CUDAGlobalMemorySize**, **CUDAL2CacheSize**, **CUDASharedMemorySizePerMP** (**CUDA OS devices**) The number of shared multiprocessors, the number of cores per multiprocessor, the global memory size, the (global) L2 cache size, and size of the shared memory in each multiprocessor of a CUDA device. Sizes are in kB.
- **VectorEngineModel, VectorEngineSerialNumber (VectorEngine OS devices)** The model and serial number of a VectorEngine device.
- VectorEngineCores, VectorEngineMemorySize, VectorEngineLLCSize,
- VectorEngineL2Size, VectorEngineL1dSize, VectorEngineL1iSize (VectorEngine OS devices) The number of cores, memory size, and the sizes of the (global) last level cache and of L2, L1d and L1i caches of a VectorEngine device. Sizes are in kB.
- **VectorEngineNUMAPartitioned (VectorEngine OS devices)** If this attribute exists, the VectorEngine device is configured in partitioned mode with multiple NUMA nodes.
- **Address, Port (Network interface OS devices)** The MAC address and the port number of a software network interface, such as eth4 on Linux.
- NodeGUID, SysImageGUID, Port1State, Port2LID, Port2LMC, Port3GID1 (OpenFabrics OS devices) The node GUID and GUID mask, the state of a port #1 (value is 4 when active), the LID and LID mask count of port #2, and GID #1 of port #3.

9.2.6 Other Object-specific Information

These info attributes are attached to objects specified in parentheses.

- **DAXDevice (NUMA Nodes)** The name of the Linux DAX device that was used to expose a non-volatile memory region as a volatile NUMA node.
- PCIBusID (GPUMemory NUMA Nodes) The PCI bus ID of the GPU whose memory is exposed in this NUMA node
- **Inclusive (Caches)** The inclusiveness of a cache (1 if inclusive, 0 otherwise). Currently only available on x86 processors.
- **SolarisProcessorGroup (Group)** The Solaris kstat processor group name that was used to build this Group object.
- PCIVendor, PCIDevice (PCI devices and bridges) The vendor and device names of the PCI device.

36 Object attributes

PCISIot (PCI devices or Bridges) The name/number of the physical slot where the device is plugged. If the physical device contains PCI bridges above the actual PCI device, the attribute may be attached to the highest bridge (i.e. the first object that actually appears below the physical slot).

Vendor, AssetTag, PartNumber, DeviceLocation, BankLocation (MemoryModule Misc objects) Information about memory modules (DIMMs) extracted from SMBIOS.

9.2.7 User-Given Information

Here is a non-exhaustive list of user-provided info attributes that have a special meaning:

IstopoStyle Enforces the style of an object (background and text colors) in the graphical output of Istopo. See CUSTOM COLORS in the Istopo(1) manpage for details.

Topology Attributes: Distances, Memory Attributes and CPU Kinds

Besides the hierarchy of objects and individual object attributes (see Object attributes), hwloc may also expose finer information about the hardware organization.

10.1 Distances

A machine with 4 CPUs may have identical links between every pairs of CPUs, or those CPUs could also only be connected through a ring. In the ring case, accessing the memory of nearby CPUs is slower than local memory, but it is also faster than accessing the memory of CPU on the opposite side of the ring. These deep details cannot be exposed in the hwloc hierarchy, that is why hwloc also exposes distances.

Distances are matrices of values between sets of objects, usually latencies or bandwidths. By default, hwloc tries to get a matrix of relative latencies between NUMA nodes when exposed by the hardware.

In the aforementioned ring case, the matrix could report 10 for latency between a NUMA node and itself, 20 for nearby nodes, and 30 for nodes that are opposites on the ring. Those are theoretical values exposed by hardware vendors (in the System Locality Distance Information Table (SLIT) in the ACPI) rather than physical latencies. They are mostly meant for comparing node relative distances.

Distances structures currently created by hwloc are:

NUMALatency (Linux, Solaris, FreeBSD) This is the matrix of theoretical latencies described above.

XGMIBandwidth (RSMI) This is matrix of unidirectional XGMI bandwidths between AMD GPUs (in MB/s). It contains 0 when there is no direct XGMI link between objects. Values on the diagonal are artificially set to very high so that local access always appears faster than remote access.

GPUs are identified by RSMI OS devices such as "rsmi0". They may be converted into the corresponding OpenCL or PCI devices using hwloc_get_obj_with_same_locality() or the hwloc-annotate tool.

hwloc_distances_transform() or hwloc-annotate may also be used to transform this matrix into something more convenient, for instance by replacing bandwidths with numbers of links between peers.

NVLinkBandwidth (NVML) This is the matrix of unidirectional NVLink bandwidths between NVIDIA GPUs (in MB/s). It contains 0 when there is no direct NVLink between objects. When there are multiple links, their bandwidth is aggregated. Values on the diagonal are artificially set to very high so that local access always appears faster than remote access.

On POWER platforms, NVLinks may also connects GPUs to CPUs. On NVIDIA platforms such as DGX-2, a NVSwitch may interconnect GPUs through NVLinks. In these cases, the distances structure is heterogeneous. GPUs always appear first in the matrix (as NVML OS devices such as "nvml0"), and non-GPU objects may appear at the end (Package for POWER processors, PCI device for NVSwitch).

NVML OS devices may be converted into the corresponding CUDA, OpenCL or PCI devices using hwloc_get_obj_with_same_locality() or the hwloc-annotate tool.

hwloc_distances_transform() or hwloc-annotate may also be used to transform this matrix into something more convenient, for instance by removing switches or CPU ports, or by replacing bandwidths with numbers of links between peers.

When a NVSwitch interconnects GPUs, only links between one GPU and different NVSwitch ports are reported. They may be merged into a single switch port with hwloc_distances_transform() or hwloc-annotate. Or a transitive closure may also be applied to report the bandwidth between GPUs across the NVSwitch.

Users may also specify their own matrices between any set of objects, even if these objects are of different types (e.g. bandwidths between GPUs and CPUs).

The entire API is located in **hwloc/distances.h**. See also Retrieve distances between objects, as well as Helpers for consulting distance matrices and Add distances between objects.

10.2 Memory Attributes

Machines with heterogeneous memory, for instance high-bandwidth memory (HBM), normal memory (DDR), and/or high-capacity slow memory (such as non-volatile memory DIMMs, NVDIMMs) require applications to allocate buffers in the appropriate target memory depending on performance and capacity needs. Those target nodes may be exposed in the hwloc hierarchy as different memory children but there is a need for performance information to select the appropriate one.

hwloc memory attributes are designed to expose memory information such as latency, bandwidth, etc. Users may also specify their own attributes and values.

The memory attributes API is located in **hwloc/memattrs.h**, see Comparing memory node attributes for finding where to allocate on and Managing memory attributes for details.

10.3 CPU Kinds

Hybrid CPUs may contain different kinds of cores. The CPU kinds API in **hwloc/cpukinds.h** provides a way to list the sets of PUs in each kind and get some optional information about their hardware characteristics and efficiency. If the operating system provides efficiency information (e.g. Windows 10), it is used to rank hwloc CPU kinds by efficiency. Otherwise, hwloc implements several heuristics based on frequencies and core types (see HWLOC_

CPUKINDS_RANKING in Environment Variables).

Attributes include:

- FrequencyMaxMHz (Linux) The maximal operating frequency of the core, as reported by cpufreq drivers on Linux.
- FrequencyBaseMHz (Linux) The base operating frequency of the core, as reported by some <code>cpufreq</code> drivers on Linux (e.g. <code>intel_pstate</code>).
- **CoreType (x86, Linux)** A string describing the kind of core, currently IntelAtom or IntelCore, as reported by the x86 CPUID instruction and future Linux kernels on some Intel processors.
- **LinuxCPUType (Linux)** The Linux-specific CPU type found in sysfs, such as intel_atom_0, as reported by future Linux kernels on some Intel processors.

See Kinds of CPU cores for details.

Importing and exporting topologies from/to XML files

hwloc offers the ability to export topologies to XML files and reload them later. This is for instance useful for loading topologies faster (see I do not want hwloc to rediscover my enormous machine topology every time I rerun a process), manipulating other nodes' topology, or avoiding the need for privileged processes (see Does hwloc require privileged access?). Topologies may be exported to XML files thanks to hwloc_topology_export_xml(), or to a XML memory buffer with hwloc_topology_export_xmlbuffer(). The Istopo program can also serve as a XML topology export tool. XML topologies may then be reloaded later with hwloc_topology_set_xml() and hwloc_topology_set_xmlbuffer(). The HWLOC_XMLFILE environment variable also tells hwloc to load the topology from the given XML file (see Environment Variables).

Note

Loading XML topologies disables binding because the loaded topology may not correspond to the physical machine that loads it. This behavior may be reverted by asserting that loaded file really matches the underlying system with the HWLOC_THISSYSTEM environment variable or the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM topology flag.

The topology flag HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES may be used to load a XML topology that contains the entire machine and restrict it to the part that is actually available to the current process (e.g. when Linux Cgroup/Cpuset are used to restrict the set of resources).

hwloc also offers the ability to export/import Topology differences.

XML topology files are not localized. They use a dot as a decimal separator. Therefore any exported topology can be reloaded on any other machine without requiring to change the locale.

XML exports contain all details about the platform. It means that two very similar nodes still have different XML exports (e.g. some serial numbers or MAC addresses are different). If a less precise exporting/importing is required, one may want to look at Synthetic topologies instead.

11.1 libxml2 and minimalistic XML backends

hwloc offers two backends for importing/exporting XML.

First, it can use the libxml2 library for importing/exporting XML files. It features full XML support, for instance when those files have to be manipulated by non-hwloc software (e.g. a XSLT parser). The libxml2 backend is enabled by default if libxml2 development headers are available (the relevant development package is usually libxml2-devel or libxml2-dev).

If libxml2 is not available at configure time, or if <code>--disable-libxml2</code> is passed, hwloc falls back to a custom backend. Contrary to the aforementioned full XML backend with libxml2, this minimalistic XML backend cannot be guaranteed to work with external programs. It should only be assumed to be compatible with the same hwloc release (even if using the libxml2 backend). Its advantage is, however, to always be available without requiring any external dependency.

If libxml2 is available but the core hwloc library should not directly depend on it, the libxml2 support may be built as a dynamicall-loaded plugin. One should pass --enable-plugins to enable plugin support (when supported) and build as plugins all component that support it. Or pass $--enable-plugins=xml_libxml$ to only build this libxml2 support as a plugin.

11.2 XML import error management

Importing XML files can fail at least because of file access errors, invalid XML syntax, non-hwloc-valid XML contents, or incompatibilities between hwloc releases (see Are XML topology files compatible between hwloc releases?). Both backend cannot detect all these errors when the input XML file or buffer is selected (when hwloc_topology_set_xml() or hwloc_topology_set_xmlbuffer() is called). Some errors such non-hwloc-valid contents can only be detected later when loading the topology with hwloc_topology_load().

It is therefore strongly recommended to check the return value of both https://hww.co.topology_set_xml() (or https://hww.co.topology_set_xml() and https://hww.co.topology_set_xml() and https://hww.co.topology_load() to handle all these errors.

Synthetic topologies

hwloc may load fake or remote topologies so as to consult them without having the underlying hardware available. Aside from loading XML topologies, hwloc also enables the building of *synthetic* topologies that are described by a single string listing the arity of each levels.

For instance, Istopo may create a topology made of 2 packages, containing a single NUMA node and a L2 cache above two single-threaded cores:

```
$ lstopo -i "pack:2 node:1 12:1 core:2 pu:1" -
Machine (2048MB)
Package L#0
   NUMANode L#0 (P#0 1024MB)
   L2 L#0 (4096KB)
   Core L#0 + PU L#0 (P#0)
   Core L#1 + PU L#1 (P#1)
Package L#1
   NUMANode L#1 (P#1 1024MB)
   L2 L#1 (4096KB)
   Core L#2 + PU L#2 (P#2)
   Core L#3 + PU L#3 (P#3)
```

Replacing - with file.xml in this command line will export this topology to XML as usual.

Note

Synthetic topologies offer a very basic way to export a topology and reimport it on another machine. It is a lot less precise than XML but may still be enough when only the hierarchy of resources matters.

12.1 Synthetic description string

Each item in the description string gives the type of the level and the number of such children under each object of the previous level. That is why the above topology contains 4 cores (2 cores times 2 nodes).

These type names must be written as numanode, package, core, 12u, 11i, pu, group (hwloc_obj_type_← sscanf() is used for parsing the type names). They do not need to be written case-sensitively, nor entirely (as long as there is no ambiguity, 2 characters such as ma select a Machine level). Note that I/O and Misc objects are not available.

Instead of specifying the type of each level, it is possible to just specify the arities and let hwloc choose all types according to usual topologies. The following examples are therefore equivalent:

```
$ lstopo -i "2 3 4 5 6"
$ lstopo -i "Package:2 NUMANode:3 L2Cache:4 Core:5 PU:6"
```

NUMA nodes are handled in a special way since they are not part of the main CPU hierarchy but rather attached below it as memory children. Thus, NUMANode: 3 actually means Group: 3 where one NUMA node is attached below each group. These groups are merged back into the parent when possible (typically when a single NUMA node is requested below each parent).

It is also possible the explicitly attach NUMA nodes to specific levels. For instance, a topology similar to a Intel Xeon Phi processor (with 2 NUMA nodes per 16-core group) may be created with:

```
$ lstopo -i "package:1 group:4 [numa] [numa] core:16 pu:4"
```

42 Synthetic topologies

The root object does not appear in the synthetic description string since it is always a Machine object. Therefore the Machine type is disallowed in the description as well.

A NUMA level (with a single NUMA node) is automatically added if needed.

Each item may be followed parentheses containing a list of space-separated attributes. For instance:

- L2iCache: 2 (size=32kB) specifies 2 children of 32kB level-2 instruction caches. The size may be specified in bytes (without any unit suffix) or as TB, GB, MB or kB.
- NUMANode: 3 (memory=16MB) specifies 3 NUMA nodes with 16MB each. The size may be specified in bytes (without any unit suffix) or as TB, GB, MB or kB.
- PU:2 (indexes=0, 2, 1, 3) specifies 2 PU children and the full list of OS indexes among the entire set of 4 PU objects.
- PU:2 (indexes=numa:core) specifies 2 PU children whose OS indexes are interleaved by NUMA node first and then by package.
- Attributes in parentheses at the very beginning of the description apply to the root object.

12.2 Loading a synthetic topology

Aside from Istopo, the hwloc programming interface offers the same ability by passing the synthetic description string to hwloc topology set synthetic() before hwloc topology load().

Synthetic topologies are created by the synthetic component. This component may be enabled by force by setting the HWLOC SYNTHETIC environment variable to something such as node: 2 core: 3 pu: 4.

Loading a synthetic topology disables binding support since the topology usually does not match the underlying hardware. Binding may be reenabled as usual by setting HWLOC_THISSYSTEM=1 in the environment or by setting the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM topology flag.

12.3 Exporting a topology as a synthetic string

The function hwloc_topology_export_synthetic() may export a topology as a synthetic string. It offers a convenient way to quickly describe the contents of a machine. The Istopo tool may also perform such an export by forcing the output format.

```
$ lstopo --of synthetic --no-io
Package:1 L3Cache:1 L2Cache:2 L1dCache:1 L1iCache:1 Core:1 PU:2
```

The exported string may be passed back to hwloc for recreating another similar topology (see also Are synthetic strings compatible between hwloc releases?). The entire tree will be similar, but some attributes such as the processor model will be missing.

Such an export is only possible if the topology is totally symmetric. It means that the symmetric_subtree field of the root object is set. Also memory children should be attached in a symmetric way (e.g. the same number of memory children below each Package object, etc.). However, I/O devices and Misc objects are ignored when looking at symmetry and exporting the string.

Interoperability With Other Software

Although hwloc offers its own portable interface, it still may have to interoperate with specific or non-portable libraries that manipulate similar kinds of objects. hwloc therefore offers several specific "helpers" to assist converting between those specific interfaces and hwloc.

Some external libraries may be specific to a particular OS; others may not always be available. The hwloc core therefore generally does not explicitly depend on these types of libraries. However, when a custom application uses or otherwise depends on such a library, it may optionally include the corresponding hwloc helper to extend the hwloc interface with dedicated helpers.

Most of these helpers use structures that are specific to these external libraries and only meaningful on the local machine. If so, the helper requires the input topology to match the current machine. Some helpers also require I/O device discovery to be supported and enabled for the current topology.

- **Linux specific features** hwloc/linux.h offers Linux-specific helpers that utilize some non-portable features of the Linux system, such as binding threads through their thread ID ("tid") or parsing kernel CPU mask files. See Linux-specific helpers.
- **Windows specific features** hwloc/windows.h offers Windows-specific helpers to query information about Windows processor groups. See Windows-specific helpers.
- Linux libnuma hwloc/linux-libnuma.h provides conversion helpers between hwloc CPU sets and libnumaspecific types, such as bitmasks. It helps you use libnuma memory-binding functions with hwloc CPU sets. See Interoperability with Linux libnuma bitmask and Interoperability with Linux libnuma unsigned long masks.
- Glibc hwloc/glibc-sched.h offers conversion routines between Glibc and hwloc CPU sets in order to use hwloc with functions such as sched getaffinity() or pthread attr setaffinity np(). See Interoperability with glibc sched affinity.
- **OpenFabrics Verbs** hwloc/openfabrics-verbs.h helps interoperability with the OpenFabrics Verbs interface. For example, it can return a list of processors near an OpenFabrics device. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with OpenFabrics.
- OpenCL hwloc/opencl.h enables interoperability with the OpenCL interface. Only the AMD and NVIDIA implementations currently offer locality information. It may return the list of processors near a GPU given as a cl_device_id. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with OpenCL.
- oneAPI Level Zero hwloc/levelzero.h enables interoperability with the oneAPI Level Zero interface. It may return the list of processors near an accelerator or GPU. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the oneAPI Level Zero interface..
- AMD ROCm SMI Library (RSMI) hwloc/rsmi.h enables interoperability with the AMD ROCm SMI interface. It may return the list of processors near an AMD GPU. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the ROCm SMI Management Library.
- NVIDIA CUDA hwloc/cuda.h and hwloc/cudart.h enable interoperability with NVIDIA CUDA Driver and Runtime interfaces. For instance, it may return the list of processors near NVIDIA GPUs. It may also return

the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the CUDA Driver API and Interoperability with the CUDA Runtime API.

- NVIDIA Management Library (NVML) hwloc/nvml.h enables interoperability with the NVIDIA NVML interface. It may return the list of processors near a NVIDIA GPU given as a nvmlDevice_t. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the NVIDIA Management Library.
- **NVIDIA displays hwloc/gl.h** enables interoperability with NVIDIA displays using the NV-CONTROL X extension (NVCtrl library). If I/O device discovery is enabled, it may return the OS device hwloc object that corresponds to a display given as a name such as :0.0 or given as a port/device pair (server/screen). See Interoperability with OpenGL displays.
- **Taskset command-line tool** The taskset command-line tool is widely used for binding processes. It manipulates CPU set strings in a format that is slightly different from hwloc's one (it does not divide the string in fixed-size subsets and separates them with commas). To ease interoperability, hwloc offers routines to convert hwloc CPU sets from/to taskset-specific string format. See for instance hwloc_bitmap_taskset_snprintf() in The bitmap API.

 $Most\ hwloc\ command\mbox{-line tools also support the $--$taskset option to manipulate taskset-specific strings.}$

Thread Safety

Like most libraries that mainly fill data structures, hwloc is not thread safe but rather reentrant: all state is held in a hwloc_topology_t instance without mutex protection. That means, for example, that two threads can safely operate on and modify two different hwloc_topology_t instances, but they should not simultaneously invoke functions that modify the *same* instance. Similarly, one thread should not modify a hwloc_topology_t instance while another thread is reading or traversing it. However, two threads can safely read or traverse the same hwloc_topology_t instance concurrently.

When running in multiprocessor environments, be aware that proper thread synchronization and/or memory coherency protection is needed to pass hwloc data (such as hwloc_topology_t pointers) from one processor to another (e.g., a mutex, semaphore, or a memory barrier). Note that this is not a hwloc-specific requirement, but it is worth mentioning.

For reference, hwloc topology t modification operations include (but may not be limited to):

Creation and destruction hwloc_topology_load(), hwloc_topology_destroy (see Topology Creation and Destruction) imply major modifications of the structure, including freeing some objects. No other thread cannot access the topology or any of its objects at the same time.

Also references to objects inside the topology are not valid anymore after these functions return.

Runtime topology modifications hwloc_topology_insert_misc_object(),hwloc_topology_alloc_group_c and hwloc_topology_insert_group_object() (see Modifying a loaded Topology) may modify the topology significantly by adding objects inside the tree, changing the topology depth, etc.

hwloc_distances_add_commit () and hwloc_distances_remove () (see Add distances between objects) modify the list of distance structures in the topology, and the former may even insert new Group objects.

hwloc_memattr_register() and hwloc_memattr_set_value() (see Managing memory attributes) modify the memory attributes of the topology.

hwloc_topology_restrict() modifies the topology even more dramatically by removing some objects.

hwloc_topology_refresh() updates some internal cached structures. (see below).

Although references to former objects *may* still be valid after insertion or restriction, it is strongly advised to not rely on any such guarantee and always re-consult the topology to reacquire new instances of objects.

Consulting distances hwloc_distances_get () and its variants are thread-safe except if the topology was recently modified (because distances may involve objects that were removed).

Whenever the topology is modified (see above), hwloc_topology_refresh() should be called in the same thread-safe context to force the refresh of internal distances structures. A call to hwloc_distances_get() may also refresh distances-related structures.

Once this refresh has been performed, multiple $hwloc_distances_get$ () may then be performed concurrently by multiple threads.

Consulting memory attributes Functions consulting memory attributes in **hwloc/memattrs.h** are thread-safe except if the topology was recently modified (because memory attributes may involve objects that were removed).

Whenever the topology is modified (see above), hwloc_topology_refresh() should be called in the same thread-safe context to force the refresh of internal memory attribute structures. A call to

46 Thread Safety

hwloc_memattr_get_value() or hwloc_memattr_get_targets() may also refresh internal structures for a given memory attribute.

Once this refresh has been performed, multiple functions consulting memory attributes may then be performed concurrently by multiple threads.

Locating topologies hwloc_topology_set_* (see Topology Detection Configuration and Query) do not modify the topology directly, but they do modify internal structures describing the behavior of the upcoming invocation of hwloc_topology_load(). Hence, all of these functions should not be used concurrently.

Components and plugins

hwloc is organized in components that are responsible for discovering objects. Depending on the topology configuration, some components will be used, some will be ignored. The usual default is to enable the native operating system component, (e.g. linux or solaris) and the pci miscellaneous component. If available, an architecture-specific component (such as x86) may also improve the topology detection.

If a XML topology is loaded, the xml discovery component will be used instead of all other components. It internally uses a specific class of components for the actual XML import/export routines (xml_libxml and xml_\circ nolibxml) but these will not be discussed here (see libxml2 and minimalistic XML backends).

15.1 Components enabled by default

The hwloc core contains a list of components sorted by priority. Each one is enabled as long as it does not conflict with the previously enabled ones. This includes native operating system components, architecture-specific ones, and if available, I/O components such as pci.

Usually the native operating system component (when it exists, e.g. linux or aix) is enabled first. Then hwloc looks for an architecture specific component (e.g. x86). Finally there also exist a basic component (no_os) that just tries to discover the number of PUs in the system.

Each component discovers as much topology information as possible. Most of them, including most native OS components, do nothing unless the topology is still empty. Some others, such as x86 and pci, can complete and annotate what other backends found earlier. Discovery is performed by phases: CPUs are first discovered, then memory is attached, then PCI, etc.

Default priorities ensure that clever components are invoked first. Native operating system components have higher priorities, and are therefore invoked first, because they likely offer very detailed topology information. If needed, it will be later extended by architecture-specific information (e.g. from the x86 component).

If any configuration function such as hwloc_topology_set_xml()) is used before loading the topology, the corresponding component is enabled first. Then, as usual, hwloc enables any other component (based on priorities) that does not conflict.

Certain components that manage a virtual topology, for instance XML topology import or synthetic topology description, conflict with all other components. Therefore, one of them may only be loaded (e.g. with hwloc topology set xml()) if no other component is enabled.

The environment variable HWLOC_COMPONENTS_VERBOSE may be set to get verbose messages about component registration (including their priority) and enabling.

15.2 Selecting which components to use

If no topology configuration functions such as hwloc_topology_set_synthetic() have been called, plugins may be selected with environment variables such as HWLOC_XMLFILE, HWLOC_SYNTHETIC, HWLOC_CFSROOT, or HWLOC_CPUID_PATH (see Environment Variables).

Finally, the environment variable HWLOC_COMPONENTS resets the list of selected components. If the variable is set and empty (or set to a single comma separating nothing, since some operating systems do not accept empty variables), the normal plugin priority order is used.

If the variable is set to x86 in this variable will cause the x86 component to take precedence over any other component, including the native operating system component. It is therefore loaded first, before hwloc tries to load

all remaining non-conflicting components. In this case, x86 would take care of discovering everything it supports, instead of only completing what the native OS information. This may be useful if the native component is buggy on some platforms.

It is possible to prevent some components from being loaded by prefixing their name with – in the list. For instance x86, -pci will load the x86 component, then let hwloc load all the usual components except pci. A single component phase may also be blacklisted, for instance with -linux:io. hwloc_topology_set_components() may also be used inside the program to prevent the loading of a specific component (or phases) for the target topology. It is possible to prevent all remaining components from being loaded by placing stop in the environment variable. Only the components listed before this keyword will be enabled.

15.3 Loading components from plugins

Components may optionally be built as plugins so that the hwloc core library does not directly depend on their dependencies (for instance the libpciaccess library). Plugin support may be enabled with the --enable-plugins configure option. All components buildable as plugins will then be built as plugins. The configure option may be given a comma-separated list of component names to specify the exact list of components to build as plugins.

Plugins are built as independent dynamic libraries that are installed in \$libdir/hwloc. All plugins found in this directory are loaded during topology_init() (unless blacklisted in HWLOC_PLUGINS_BLACKLIST, see Environment Variables). A specific list of directories (colon-separated) to scan may be specified in the HWLOC_ \leftarrow PLUGINS PATH environment variable.

Note that loading a plugin just means that the corresponding component is registered to the hwloc core. Components are then only enabled if the topology configuration requests it, as explained in the previous sections.

Also note that plugins should carefully be enabled and used when embedding hwloc in another project, see Embedding hwloc in Other Software for details.

15.4 Existing components and plugins

All components distributed within hwloc are listed below. The list of actually available components may be listed at running with the HWLOC_COMPONENTS_VERBOSE environment variable (see Environment Variables).

- **linux** The official component for discovering CPU, memory and I/O devices on Linux. It discovers PCI devices without the help of external libraries such as libpciaccess, but requires the pci component for adding vendor/device names to PCI objects. It also discovers many kinds of Linux-specific OS devices.
- **aix**, **darwin**, **freebsd**, **hpux**, **netbsd**, **solaris**, **windows** Each officially supported operating system has its own native component, which is statically built when supported, and which is used by default.
- **x86** The x86 architecture (either 32 or 64 bits) has its own component that may complete or replace the previously-found CPU information. It is statically built when supported.
- bgq This component is specific to IBM BlueGene/Q compute node (running CNK). It is built and enabled by default when --host=powerpc64-bgq-linux is passed to configure (see How do I build hwloc for BlueGene/Q?).
- **no_os** A basic component that just tries to detect the number of processing units in the system. It mostly serves on operating systems that are not natively supported. It is always statically built.
- **pci** PCI object discovery uses the external pciaccess library (aka libpciaccess); see I/O Devices. It may also annotate existing PCI devices with vendor and device names. It may be built as a plugin.
- **opencl** The OpenCL component creates co-processor OS device objects such as *opencl0d0* (first device of the first OpenCL platform) or *opencl1d3* (fourth device of the second platform). Only the AMD and NVIDIA OpenCL implementations currently offer locality information. **It may be built as a plugin**.
- rsmi This component creates GPU OS device objects such as *rsmi0* for describing AMD GPUs. It may be built as a plugin.
- **levelzero** This component creates co-processor OS device objects such as *ze0* for describing oneAPI Level Zero devices. **It may be built as a plugin**.

- **cuda** This component creates co-processor OS device objects such as *cuda0* that correspond to NVIDIA GPUs used with CUDA library. **It may be built as a plugin**.
- **nvml** Probing the NVIDIA Management Library creates OS device objects such as *nvml0* that are useful for batch schedulers. It also detects the actual PCIe link bandwidth without depending on power management state and without requiring administrator privileges. **It may be built as a plugin**.
- **gl** Probing the NV-CONTROL X extension (NVCtrl library) creates OS device objects such as :0.0 corresponding to NVIDIA displays. They are useful for graphical applications that need to place computation and/or data near a rendering GPU. **It may be built as a plugin**.
- synthetic Synthetic topology support (see Synthetic topologies) is always built statically.
- **xml** XML topology import (see Importing and exporting topologies from/to XML files) is always built statically. It internally uses one of the XML backends (see libxml2 and minimalistic XML backends).
 - xml nolibxml is a basic and hwloc-specific XML import/export. It is always statically built.
 - xml_libxml relies on the external libxml2 library for provinding a feature-complete XML import/export. It may be built as a plugin.

fake A dummy plugin that does nothing but is used for debugging plugin support.

Embedding hwloc in Other Software

It can be desirable to include hwloc in a larger software package (be sure to check out the LICENSE file) so that users don't have to separately download and install it before installing your software. This can be advantageous to ensure that your software uses a known-tested/good version of hwloc, or for use on systems that do not have hwloc pre-installed.

When used in "embedded" mode, hwloc will:

- · not install any header files
- · not build any documentation files
- · not build or install any executables or tests
- not build libhwloc.* instead, it will build libhwloc_embedded.*

There are two ways to put hwloc into "embedded" mode. The first is directly from the configure command line:

```
shell$ ./configure --enable-embedded-mode ...
```

The second requires that your software project uses the GNU Autoconf / Automake / Libtool tool chain to build your software. If you do this, you can directly integrate hwloc's m4 configure macro into your configure script. You can then invoke hwloc's configuration tests and build setup by calling a m4 macro (see below).

Although hwloc dynamic shared object plugins may be used in embedded mode, the embedder project will have to manually setup dlopen or libltdl in its build system so that hwloc can load its plugins at run time. Also, embedders should be aware of complications that can arise due to public and private linker namespaces (e.g., if the embedder project is loaded into a private namespace and then hwloc tries to dynamically load its plugins, such loading may fail since the hwloc plugins can't find the hwloc symbols they need). The embedder project is **strongly** advised not to use hwloc's dynamically loading plugins / dlopen / libltdl capability.

16.1 Using hwloc's M4 Embedding Capabilities

Every project is different, and there are many different ways of integrating hwloc into yours. What follows is *one* example of how to do it.

If your project uses recent versions Autoconf, Automake, and Libtool to build, you can use hwloc's embedded m4 capabilities. We have tested the embedded m4 with projects that use Autoconf 2.65, Automake 1.11.1, and Libtool 2.2.6b. Slightly earlier versions of may also work but are untested. Autoconf versions prior to 2.65 are almost certain to not work.

You can either copy all the config/hwloc*m4 files from the hwloc source tree to the directory where your project's m4 files reside, or you can tell aclocal to find more m4 files in the embedded hwloc's "config" subdirectory (e.g., add "-lpath/to/embedded/hwloc/config" to your Makefile.am's ACLOCAL AMFLAGS).

The following macros can then be used from your configure script (only HWLOC_SETUP_CORE *must* be invoked if using the m4 macros):

HWLOC_SETUP_CORE(config-dir-prefix, action-upon-success, action-upon-failure, print_banner_or_not) ←
 Invoke the hwloc configuration tests and setup the hwloc tree to build. The first argument is the prefix to use for AC_OUTPUT files – it's where the hwloc tree is located relative to \$top_srcdir. Hence, if your

embedded hwloc is located in the source tree at contrib/hwloc, you should pass <code>[contrib/hwloc]</code> as the first argument. If HWLOC_SETUP_CORE and the rest of <code>configure</code> completes successfully, then "make" traversals of the hwloc tree with standard Automake targets (all, clean, install, etc.) should behave as expected. For example, it is safe to list the hwloc directory in the SUBDIRS of a higher-level Makefile.am. The last argument, if not empty, will cause the macro to display an announcement banner that it is starting the hwloc core configuration tests.

HWLOC_SETUP_CORE will set the following environment variables and AC_SUBST them: HWLOC_← EMBEDDED_CFLAGS, HWLOC_EMBEDDED_CPPFLAGS, and HWLOC_EMBEDDED_LIBS. These flags are filled with the values discovered in the hwloc-specific m4 tests, and can be used in your build process as relevant. The _CFLAGS, _CPPFLAGS, and _LIBS variables are necessary to build libhwloc (or libhwloc_← embedded) itself.

HWLOC_SETUP_CORE also sets HWLOC_EMBEDDED_LDADD environment variable (and AC_SUBSTs it) to contain the location of the libhwloc_embedded.la convenience Libtool archive. It can be used in your build process to link an application or other library against the embedded hwloc library.

NOTE: If the HWLOC_SET_SYMBOL_PREFIX macro is used, it must be invoked *before* HWLOC_← SETUP CORE.

- HWLOC_BUILD_STANDALONE: HWLOC_SETUP_CORE defaults to building hwloc in an "embedded" mode (described above). If HWLOC_BUILD_STANDALONE is invoked *before* HWLOC_SETUP_CORE, the embedded definitions will not apply (e.g., libhwloc.la will be built, not libhwloc_embedded.la).
- HWLOC_SET_SYMBOL_PREFIX(foo_): Tells the hwloc to prefix all of hwloc's types and public symbols with "foo_"; meaning that function hwloc_init() becomes foo_hwloc_init(). Enum values are prefixed with an upper-case translation if the prefix supplied; HWLOC_OBJ_CORE becomes FOO_hwloc_OBJ_CORE. This is recommended behavior if you are including hwloc in middleware it is possible that your software will be combined with other software that links to another copy of hwloc. If both uses of hwloc utilize different symbol prefixes, there will be no type/symbol clashes, and everything will compile, link, and run successfully. If you both embed hwloc without changing the symbol prefix and also link against an external hwloc, you may get multiple symbol definitions when linking your final library or application.
- HWLOC_SETUP_DOCS, HWLOC_SETUP_UTILS, HWLOC_SETUP_TESTS: These three macros only apply when hwloc is built in "standalone" mode (i.e., they should NOT be invoked unless HWLOC_BUILD_

 STANDALONE has already been invoked).
- HWLOC_DO_AM_CONDITIONALS: If you embed hwloc in a larger project and build it conditionally with Automake (e.g., if HWLOC_SETUP_CORE is invoked conditionally), you must unconditionally invoke HWLOC

 _DO_AM_CONDITIONALS to avoid warnings from Automake (for the cases where hwloc is not selected to be built). This macro is necessary because hwloc uses some AM_CONDITIONALs to build itself, and AM

 _CONDITIONALS cannot be defined conditionally. Note that it is safe (but unnecessary) to call HWLOC

 _DO_AM_CONDITIONALS even if HWLOC_SETUP_CORE is invoked unconditionally. If you are not using Automake to build hwloc, this macro is unnecessary (and will actually cause errors because it invoked AM_* macros that will be undefined).

NOTE: When using the HWLOC_SETUP_CORE m4 macro, it may be necessary to explicitly invoke AC_ CANONICAL_TARGET (which requires config.sub and config.guess) and/or AC_USE_SYSTEM_EXTENSIONS macros early in the configure script (e.g., after AC_INIT but before AM_INIT_AUTOMAKE). See the Autoconf documentation for further information.

Also note that hwloc's top-level configure.ac script uses exactly the macros described above to build hwloc in a standalone mode (by default). You may want to examine it for one example of how these macros are used.

16.2 Example Embedding hwloc

Here's an example of integrating with a larger project named sandbox that already uses Autoconf, Automake, and Libtool to build itself:

```
# First, cd into the sandbox project source tree
shell$ cd sandbox
shell$ cp -r /somewhere/else/hwloc-<version> my-embedded-hwloc
shell$ edit Makefile.am
```

```
1. Add "-Imy-embedded-hwloc/config" to ACLOCAL_AMFLAGS
 2. Add "my-embedded-hwloc" to SUBDIRS
 3. Add "\$ (HWLOC_EMBEDDED_LDADD)" and "\$ (HWLOC_EMBEDDED_LIBS)" to
    sandbox's executable's LDADD line. The former is the name of the
    Libtool convenience library that hwloc will generate. The latter
    is any dependent support libraries that may be needed by
    $ (HWLOC_EMBEDDED_LDADD) .
 4. Add "$(HWLOC_EMBEDDED_CFLAGS)" to AM_CFLAGS
 5. Add "$(HWLOC_EMBEDDED_CPPFLAGS)" to AM_CPPFLAGS
shell$ edit configure.ac
 1. Add "HWLOC_SET_SYMBOL_PREFIX(sandbox_hwloc_)" line
 2. Add "HWLOC_SETUP_CORE([my-embedded-hwloc], [happy=yes], [happy=no])" line
 3. Add error checking for happy=no case
shell$ edit sandbox.c
 1. Add #include <hwloc.h>
 2. Add calls to sandbox_hwloc_init() and other hwloc API functions
```

Now you can bootstrap, configure, build, and run the sandbox as normal – all calls to "sandbox_hwloc_*" will use the embedded hwloc rather than any system-provided copy of hwloc.

Frequently Asked Questions

17.1 Concepts

17.1.1 I only need binding, why should I use hwloc?

hwloc is its portable API that works on a variety of operating systems. It supports binding of threads, processes and memory buffers (see CPU binding and Memory binding). Even if some features are not supported on some systems, using hwloc is much easier than reimplementing your own portability layer.

Moreover, hwloc provides knowledge of cores and hardware threads. It offers easy ways to bind tasks to individual hardware threads, or to entire multithreaded cores, etc. See How may I ignore symmetric multithreading, hyper-threading, etc. in hwlo Most alternative software for binding do not even know whether each core is single-threaded, multithreaded or hyper-threaded. They would bind to individual threads without any way to know whether multiple tasks are in the same physical core.

However, using hwloc comes with an overhead since a topology must be loaded before gathering information and binding tasks or memory. Fortunately this overhead may be significantly reduced by filtering non-interesting information out of the topology. For instance the following code builds a topology that only contains Cores (explicitly filtered-in below), hardware threads (PUs, cannot be filtered-out), NUMA nodes (cannot be filtered-out), and the root object (usually a Machine; the root cannot be removed without breaking the tree).

```
hwloc_topology_t topology;
hwloc_topology_init(&topology);
/* filter everything out */
hwloc_topology_set_all_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_NONE);
/* filter Cores back in */
hwloc_topology_set_type_filter(topology, HWLOC_OBJ_CORE, HWLOC_TYPE_FILTER_KEEP_ALL);
hwloc_topology_load(topology);
```

However, one should remember that filtering such objects out removes locality information from the hwloc tree. For instance, we do not know anymore which PU is close to which NUMA node. This would be useful to applications that explicitly want to place specific memory buffers close to specific tasks. Those applications just need to tell hwloc to keep Group objects that bring structure information:

```
hwloc_topology_set_type_filter(topology, HWLOC_OBJ_GROUP, HWLOC_TYPE_FILTER_KEEP_STRUCTURE);
```

Note that the default configuration is to keep all objects enabled, except I/Os and instruction caches.

17.1.2 Should I use logical or physical/OS indexes? and how?

One of the original reasons why hwloc was created is that **physical/OS indexes** (obj->os_index) are often crazy and unpredictable: processors numbers are usually non-contiguous (processors 0 and 1 are not physically close), they vary from one machine to another, and may even change after a BIOS or system update. This numbers make task placement hardly portable. Moreover some objects have no physical/OS numbers (caches), and some objects have non-unique numbers (core numbers are only unique within a socket). Physical/OS indexes are only guaranteed to exist and be unique for PU and NUMA nodes.

hwloc therefore introduces **logical indexes** (obj->logical_index) which are portable, contiguous and logically ordered (based on the resource organization in the locality tree). In general, one should only use logical indexes and just let hwloc do the internal conversion when really needed (when talking to the OS and hardware).

hwloc developers recommends that users do not use physical/OS indexes unless they really know what they are doing. The main reason for still using physical/OS indexes is when interacting with non-hwloc tools such as numactl or taskset, or when reading hardware information from raw sources such as /proc/cpuinfo.

Istopo options -1 and -p may be used to switch between logical indexes (prefixed with L#) and physical/OS indexes (P#). Converting one into the other may also be achieved with hwloc-calc which may manipulate either logical or physical indexes as input or output. See also hwloc-calc.

```
# Convert PU with physical number 3 into logical number
$ hwloc-calc -I pu --physical-input --logical-output pu:3
5

# Convert a set of NUMA nodes from logical to physical
# (beware that the output order may not match the input order)
$ hwloc-calc -I numa --logical-input --physical-output numa:2-3 numa:7
0,2,5
```

17.1.3 hwloc is only a structural model, it ignores performance models, memory bandwidth, etc.?

hwloc is indeed designed to provide applications with a structural model of the platform. This is an orthogonal approach to describing the machine with performance models, for instance using memory bandwidth or latencies measured by benchmarks. We believe that both approaches are important for helping application make the most of the hardware.

For instance, on a dual-processor host with four cores each, hwloc clearly shows which four cores are together. Latencies between all pairs of cores of the same processor are likely identical, and also likely lower than the latency between cores of different processors. However, the structural model cannot guarantee such implementation details. On the other side, performance models would reveal such details without always clearly identifying which cores are in the same processor.

The focus of hwloc is mainly of the structural modeling side. However, hwloc lets user adds performance information to the topology through distances (see Distances), memory attributes (see Memory Attributes) or even custom annotations (see How do I annotate the topology with private notes?). hwloc may also use such distance information for grouping objects together (see hwloc only has a one-dimensional view of the architecture, it ignores distances? and What are these Group objects in my topology?).

17.1.4 hwloc only has a one-dimensional view of the architecture, it ignores distances?

hwloc places all objects in a tree. Each level is a one-dimensional view of a set of similar objects. All children of the same object (siblings) are assumed to be equally interconnected (same distance between any of them), while the distance between children of different objects (cousins) is supposed to be larger.

Modern machines exhibit complex hardware interconnects, so this tree may miss some information about the actual physical distances between objects. The hwloc topology may therefore be annotated with distance information that may be used to build a more realistic representation (multi-dimensional) of each level. For instance, there can be a distance matrix that representing the latencies between any pair of NUMA nodes if the BIOS and/or operating system reports them.

For more information about the hwloc distances, see Distances.

17.1.5 What are these Group objects in my topology?

hwloc comes with a set of predefined object types (Core, Package, NUMA node, Caches) that match the vast majority of hardware platforms. The HWLOC_OBJ_GROUP type was designed for cases where this set is not sufficient. Groups may be used anywhere to add more structure information to the topology, for instance to show that 2 out of 4 NUMA nodes are actually closer than the others. When applicable, the <code>subtype</code> field describes why a Group was actually added (see also Normal attributes).

hwloc currently uses Groups for the following reasons:

- NUMA parents when memory locality does not match any existing object.
- I/O parents when I/O locality does not match any existing object.
- Distance-based groups made of close objects.

17.1 Concepts 57

• AMD Bulldozer dual-core compute units (subtype is ComputeUnit, in the x86 backend), but these objects are usually merged with the L2 caches.

- Intel Extended Topology Enumeration levels (in the x86 backend).
- Windows processor groups (unless they contain a single NUMA node, or a single Package, etc.).
- IBM S/390 "Books" on Linux (subtype is Book).
- · AIX unknown hierarchy levels.

hwloc Groups are only kept if no other object has the same locality information. It means that a Group containing a single child is merged into that child. And a Group is merged into its parent if it is its only child. For instance a Windows processor group containing a single NUMA node would be merged with that NUMA node since it already contains the relevant hierarchy information.

When inserting a custom Group with hwloc_hwloc_topology_insert_group_object(), this merging may be disabled by setting its dont_merge attribute.

17.1.6 What happens if my topology is asymmetric?

hwloc supports asymmetric topologies even if most platforms are usually symmetric. For example, there could be different types of processors in a single machine, each with different numbers of cores, symmetric multithreading, or levels of caches.

In practice, asymmetric topologies mostly appear when intermediate groups are added for I/O affinity: on a 4-package machine, an I/O bus may be connected to 2 packages. These packages are below an additional Group object, while the other packages are not (see also What are these Group objects in my topology?).

To understand how hwloc manages such cases, one should first remember the meaning of levels and cousin objects. All objects of the same type are gathered as horizontal levels with a given depth. They are also connected through the cousin pointers of the hwloc_obj structure. Object attribute (cache depth and type, group depth) are also taken in account when gathering objects as horizontal levels. To be clear: there will be one level for L1i caches, another level for L1d caches, another one for L2, etc.

If the topology is asymmetric (e.g., if a group is missing above some processors), a given horizontal level will still exist if there exist any objects of that type. However, some branches of the overall tree may not have an object located in that horizontal level. Note that this specific hole within one horizontal level does not imply anything for other levels. All objects of the same type are gathered in horizontal levels even if their parents or children have different depths and types.

See the diagram in Terms and Definitions for a graphical representation of such topologies.

Moreover, it is important to understand that a same parent object may have children of different types (and therefore, different depths). These children are therefore siblings (because they have the same parent), but they are *not* cousins (because they do not belong to the same horizontal level).

17.1.7 What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system?

hwloc creates one PU (processing unit) object per hardware thread. If your machine supports symmetric multithreading, for instance Hyper-Threading, each Core object may contain multiple PU objects:

```
$ lstopo -
...
Core L#0
PU L#0 (P#0)
PU L#1 (P#2)
Core L#1
PU L#2 (P#1)
PU L#3 (P#3)
```

x86 machines usually offer the ability to disable hyper-threading in the BIOS. Or it can be disabled on the Linux kernel command-line at boot time, or later by writing in sysfs virtual files.

If you do so, the hwloc topology structure does not significantly change, but some PU objects will not appear anymore. No level will disappear, you will see the same number of Core objects, but each of them will contain a single PU now. The PU level does not disappear either (remember that hwloc topologies always contain a PU level at the bottom of the topology) even if there is a single PU object per Core parent.

```
$ lstopo -
...
Core L#0
PU L#0 (P#0)
Core L#1
PU L#1 (P#1)
```

17.1.8 How may I ignore symmetric multithreading, hyper-threading, etc. in hwloc?

First, see What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system? for more information about multithreading.

If you need to ignore symmetric multithreading in software, you should likely manipulate hwloc Core objects directly:

Whenever you want to bind a process or thread to a core, make sure you singlify its cpuset first, so that the task is actually bound to a single thread within this core (to avoid useless migrations).

```
/* bind on the second core */
hwloc_obj_t core = hwloc_get_obj_by_type(topology, HWLOC_OBJ_CORE, 1);
hwloc_cpuset_t set = hwloc_bitmap_dup(core->cpuset);
hwloc_bitmap_singlify(set);
hwloc_set_cpubind(topology, set, 0);
hwloc_bitmap_free(set);
```

With hwloc-calc or hwloc-bind command-line tools, you may specify that you only want a single-thread within each core by asking for their first PU object:

```
$ hwloc-calc core:4-7
0x0000ff00
$ hwloc-calc core:4-7.pu:0
0x00005500
```

When binding a process on the command-line, you may either specify the exact thread that you want to use, or ask hwloc-bind to singlify the cpuset before binding

```
$ hwloc-bind core:3.pu:0 -- echo "hello from first thread on core #3"
hello from first thread on core #3
...
$ hwloc-bind core:3 --single -- echo "hello from a single thread on core #3"
hello from a single thread on core #3
```

17.2 Advanced

17.2.1 I do not want hwloc to rediscover my enormous machine topology every time I rerun a process

Although the topology discovery is not expensive on common machines, its overhead may become significant when multiple processes repeat the discovery on large machines (for instance when starting one process per core in a parallel application). The machine topology usually does not vary much, except if some cores are stopped/restarted or if the administrator restrictions are modified. Thus rediscovering the whole topology again and again may look useless.

For this purpose, hwloc offers XML import/export and shared memory features.

XML lets you save the discovered topology to a file (for instance with the Istopo program) and reload it later by setting the HWLOC_XMLFILE environment variable. The HWLOC_THISSYSTEM environment variable should also be set to 1 to assert that loaded file is really the underlying system.

Loading a XML topology is usually much faster than querying multiple files or calling multiple functions of the operating system. It is also possible to manipulate such XML files with the C programming interface, and the import/export may also be directed to memory buffer (that may for instance be transmitted between applications through a package). See also Importing and exporting topologies from/to XML files.

17.3 Caveats 59

Note

The environment variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES may be used to load a XML topology that contains the entire machine and restrict it to the part that is actually available to the current process (e.g. when Linux Cgroup/Cpuset are used to restrict the set of resources). See Environment Variables.

Shared-memory topologies consist in one process exposing its topology in a shared-memory buffer so that other processes (running on the same machine) may use it directly. This has the advantage of reducing the memory footprint since a single topology is stored in physical memory for multiple processes. However, it requires all processes to map this shared-memory buffer at the same virtual address, which may be difficult in some cases. This API is described in Sharing topologies between processes.

17.2.2 How many topologies may I use in my program?

hwloc lets you manipulate multiple topologies at the same time. However, these topologies consume memory and system resources (for instance file descriptors) until they are destroyed. It is therefore discouraged to open the same topology multiple times.

Sharing a single topology between threads is easy (see Thread Safety) since the vast majority of accesses are read-only.

read-only.

If multiple topologies of different (but similar) nodes are needed in your program, have a look at How to avoid memory waste when man

17.2.3 How to avoid memory waste when manipulating multiple similar topologies?

hwloc does not share information between topologies. If multiple similar topologies are loaded in memory, for instance the topologies of different identical nodes of a cluster, lots of information will be duplicated.

hwloc/diff.h (see also Topology differences) offers the ability to compute topology differences, apply or unapply them, or export/import to/from XML. However, this feature is limited to basic differences such as attribute changes. It does not support complex modifications such as adding or removing some objects.

17.2.4 How do I annotate the topology with private notes?

Each hwloc object contains a userdata field that may be used by applications to store private pointers. This field is only valid during the lifetime of these container object and topology. It becomes invalid as soon the topology is destroyed, or as soon as the object disappears, for instance when restricting the topology. The userdata field is not exported/imported to/from XML by default since hwloc does not know what it contains. This behavior may be changed by specifying application-specific callbacks with hwloc_topology_set_userdata_export_callback() and hwloc_topology_set_userdata_import_callback () and hwl

It is also possible to insert Misc objects with a custom name anywhere as a leaf of the topology (see Miscellaneous objects). And Misc objects may have their own userdata and info attributes just like any other object

The hwloc-annotate command-line tool may be used for adding Misc objects and info attributes.

There is also a topology-specific userdata pointer that can be used to recognize different topologies by storing a custom pointer. It may be manipulated with hwloc_topology_get_userdata().

17.3 Caveats

17.3.1 Why is hwloc slow?

Building a hwloc topology on a large machine may be slow because the discovery of hundreds of hardware cores or threads takes time (especially when reading thousands of sysfs files on Linux). Ignoring some objects (for instance caches) that aren't useful to the current application may improve this overhead (see Lonly need binding, why should Luse hwloc?). One should also consider using XML (see

I do not want hwloc to rediscover my enormous machine topology every time I rerun a process) to work around such issues.

Additionally, Istopo enables most hwloc objects and discovery flags by default so that the output topology is as precise as possible (while hwloc disables many of them by default). This includes I/O device discovery through PCI libraries as well as external libraries such as NVML. To speed up Istopo, you may disable such features with command-line options such as -no-io.

When NVIDIA GPU probing is enabled with CUDA or NVML, one should make sure that the *Persistent* mode is enabled (with nvidia-smi -pm 1) to avoid significant GPU initialization overhead.

When AMD GPU discovery is enabled with OpenCL and hwloc is used remotely over ssh, some spurious round-trips on the network may significantly increase the discovery time. Forcing the DISPLAY environment variable to the remote X server display (usually:0) instead of only setting the COMPUTE variable may avoid this.

Also remember that these components may be disabled at build-time with configure flags such as --disable-opencl, --disable-cuda or --disable-nvml, and at runtime with the environment variable HWLOC_COMPONENTS=-opencl, -cuda, -nvml or with hwloc_topology_set_components().

17.3.2 Does hwloc require privileged access?

hwloc discovers the topology by querying the operating system. Some minor features may require privileged access to the operation system. For instance memory module discovery on Linux is reserved to root, and the entire PCI discovery on Solaris and BSDs requires access to some special files that are usually restricted to root (/dev/pci* or /devices/pci*).

To workaround this limitation, it is recommended to export the topology as a XML file generated by the administrator (with the Istopo program) and make it available to all users (see Importing and exporting topologies from/to XML files). It will offer all discovery information to any application without requiring any privileged access anymore. Only the necessary hardware characteristics will be exported, no sensitive information will be disclosed through this XML export.

This XML-based model also has the advantage of speeding up the discovery because reading a XML topology is usually much faster than querying the operating system again.

The utility hwloc-dump-hwdata is also involved in gathering privileged information at boot time and making it available to non-privileged users (note that this may require a specific SELinux MLS policy module). However, it only applies to Intel Xeon Phi processors for now (see Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?). See also HWLOC_DUMPED_HWDATA_DIR in Environment Variables for details about the location of dumped files.

17.3.3 What should I do when hwloc reports "operating system" warnings?

When the operating system reports invalid locality information (because of either software or hardware bugs), hwloc may fail to insert some objects in the topology because they cannot fit in the already built tree of resources. If so, hwloc will report a warning like the following. The object causing this error is ignored, the discovery continues but the resulting topology will miss some objects and may be asymmetric (see also What happens if my topology is asymmetric?).

```
*************

* hwloc received invalid information from the operating system.

* L3 (cpuset 0x000003f0) intersects with NUMANode (P#0 cpuset 0x0000003f) without inclusion!

* Error occurred in topology.c line 940

* Please report this error message to the hwloc user's mailing list,

* along with the files generated by the hwloc-gather-topology script.

* hwloc will now ignore this invalid topology information and continue.
```

These errors are common on large AMD platforms because of BIOS and/or Linux kernel bugs causing invalid L3 cache information. In the above example, the hardware reports a L3 cache that is shared by 2 cores in the first NUMA node and 4 cores in the second NUMA node. That's wrong, it should actually be shared by all 6 cores in a single NUMA node. The resulting topology will miss some L3 caches.

If your application does not care about cache sharing, or if you do not plan to request cache-aware binding in your process launcher, you may likely ignore this error (and hide it by setting HWLOC_HIDE_ERRORS=1 in your environment).

Some platforms report similar warnings about conflicting Packages and NUMANodes.

17.4 Platform-specific 61

On x86 hosts, passing $\texttt{HWLOC_COMPONENTS} = x86$ in the environment may workaround some of these issues by switching to a different way to discover the topology.

Upgrading the BIOS and/or the operating system may help. Otherwise, as explained in the message, reporting this issue to the hwloc developers (by sending the tarball that is generated by the hwloc-gather-topology script on this platform) is a good way to make sure that this is a software (operating system) or hardware bug (BIOS, etc).

See also Questions and Bugs. Opening an issue on GitHub automatically displays hints on what information you should provide when reporting such bugs.

17.3.4 Why does Valgrind complain about hwloc memory leaks?

If you are debugging your application with Valgrind, you want to avoid memory leak reports that are caused by hwloc and not by your program.

hwloc itself is often checked with Valgrind to make sure it does not leak memory. However, some global variables in hwloc dependencies are never freed. For instance libz allocates its global state once at startup and never frees it so that it may be reused later. Some libxml2 global state is also never freed because hwloc does not know whether it can safely ask libxml2 to free it (the application may also be using libxml2 outside of hwloc).

These unfreed variables cause leak reports in Valgrind. hwloc installs a Valgrind *suppressions* file to hide them. You should pass the following command-line option to Valgrind to use it:

--suppressions=/path/to/hwloc-valgrind.supp

17.4 Platform-specific

17.4.1 How do I enable CUDA and select which CUDA version to use?

hwloc enables CUDA as soon as it finds CUDA development headers and libraries on the system. This detection may be performed thanks to pkg-config but it requires hwloc to know which CUDA version to look for. This may be done by passing -with-cuda-version=11.0 to the configure script. Otherwise hwloc will also look for the CUDA VERSION environment variable.

If pkg-config does not work, passing --with-cuda=/path/to/cuda to the configure script is another way to define the corresponding library and header paths. Finally, these paths may also be set through environment variables such as LIBRARY PATH and C INCLUDE PATH.

These paths, either detected by pkg-config or given manually, will also be used to detect NVML and OpenCL libraries and enable their hwloc backends.

To find out whether CUDA was detected and enabled, look in *Probe / display I/O devices* at the end of the configure script output. Passing --enable-cuda will also cause configure to fail if CUDA could not be found and enabled in hwloc.

17.4.2 How do I find the local MCDRAM NUMA node on Intel Xeon Phi processor?

Intel Xeon Phi processors introduced a new memory architecture by possibly having two distinct local memories \leftarrow : some normal memory (DDR) and some high-bandwidth on-package memory (MCDRAM). Processors can be configured in various clustering modes to have up to 4 *Clusters*. Moreover, each *Cluster* (quarter, half or whole processor) of the processor may have its own local parts of the DDR and of the MCDRAM. This memory and clustering configuration may be probed by looking at MemoryMode and ClusterMode attributes, see Hardware Platform Information and doc/examples/get-knl-modes.c in the source directory.

Starting with version 2.0, hwloc properly exposes this memory configuration. DDR and MCDRAM are attached as two memory children of the same parent, DDR first, and MCDRAM second if any. Depending on the processor configuration, that parent may be a Package, a Cache, or a Group object of type Cluster.

Hence cores may have one or two local NUMA nodes, listed by the core nodeset. An application may allocate local memory from a core by using that nodeset. The operating system will actually allocate from the DDR when possible, or fallback to the MCDRAM.

To allocate specifically on one of these memories, one should walk up the parent pointers until finding an object with some memory children. Looking at these memory children will give the DDR first, then the MCDRAM if any. Their nodeset may then be used for allocating or binding memory buffers.

One may also traverse the list of NUMA nodes until finding some whose cpuset matches the target core or PUs. The MCDRAM NUMA nodes may be identified thanks to the <code>subtype</code> field which is set to <code>MCDRAM</code>.

Command-line tools such as hwloc-bind may bind memory on the MCDRAM by using the *hbm* keyword. For instance, to bind on the first MCDRAM NUMA node:

```
$ hwloc-bind --membind --hbm numa:0 -- myprogram
$ hwloc-bind --membind numa:0 -- myprogram
```

17.4.3 Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?

Intel Xeon Phi processors may use the on-package memory (MCDRAM) as either memory or a memory-side cache (reported as a L3 cache by hwloc by default, see <code>HWLOC_KNL_MSCACHE_L3</code> in Environment Variables). There are also several clustering modes that significantly affect the memory organization (see How do I find the local MCDRAM NUMA node for more information about these modes). Details about these are currently only available to privileged users. Without them, hwloc relies on a heuristic for guessing the modes.

The hwloc-dump-hwdata utility may be used to dump this privileged binary information into human-readable and world-accessible files that the hwloc library will later load. The utility should usually run as root once during boot, in order to update dumped information (stored under /var/run/hwloc by default) in case the MCDRAM or clustering configuration changed between reboots.

When SELinux MLS policy is enabled, a specific hwloc policy module may be required so that all users get access to the dumped files (in /var/run/hwloc by default). One may use hwloc policy files from the SELinux Reference Policy at https://github.com/TresysTechnology/refpolicy-contrib (see also the documentation at https://github.com/TresysTechnology/refpolicy/wiki/GettingStarted).

hwloc-dump-hwdata requires dmi-sysfs kernel module loaded.

The utility is currently unneeded on platforms without Intel Xeon Phi processors.

See HWLOC DUMPED HWDATA DIR in Environment Variables for details about the location of dumped files.

17.4.4 How do I build hwloc for BlueGene/Q?

IBM BlueGene/Q machines run a standard Linux on the login/frontend nodes and a custom CNK (*Compute Node Kernel*) on the compute nodes.

To discover the topology of a login/frontend node, hwloc should be configured as usual, without any BlueGene/Q-specific option.

However, one would likely rather discover the topology of the compute nodes where parallel jobs are actually running. If so, hwloc must be cross-compiled with the following configuration line:

```
./configure --host=powerpc64-bgq-linux --disable-shared --enable-static \ CPPFLAGS='-I/bgsys/drivers/ppcfloor -I/bgsys/drivers/ppcfloor/spi/include/kernel/cnk/'
```

CPPFLAGS may have to be updated if your platform headers are installed in a different directory.

17.4.5 How do I build hwloc for Windows?

hwloc releases are available as pre-built ZIPs for Windows on both 32bits and 64bits x86 platforms. They are built using MSYS2 and MinGW on a Windows host. Such an environment allows using the Unix-like configure, make and make install steps without having to tweak too many variables or options. One may look at contrib/ci.inria.fr/job-3-mingw.sh in the hwloc repository for an example used for nightly testing. hwloc also supports the Cygwin environment for porting Unix code to Windows.

hwloc releases also contain a basic Microsoft Visual Studio solution under contrib/windows/.

17.4.6 How to get useful topology information on NetBSD?

The NetBSD (and FreeBSD) backend uses x86-specific topology discovery (through the x86 component). This implementation requires CPU binding so as to query topology information from each individual processor. This means that hwloc cannot find any useful topology information unless user-level process binding is allowed by the NetBSD kernel. The security.models.extensions.user_set_cpu_affinity sysctl variable must be set to 1 to do so. Otherwise, only the number of processors will be detected.

17.4.7 Why does binding fail on AIX?

The AIX operating system requires specific user capabilities for attaching processes to resource sets (CAP_← NUMA_ATTACH). Otherwise functions such as hwloc_set_cpubind() fail (return -1 with errno set to EPERM). This capability must also be inherited (through the additional CAP_PROPAGATE capability) if you plan to bind a process before forking another process, for instance with hwloc-bind. These capabilities may be given by the administrator with:

```
chuser "capabilities=CAP_PROPAGATE,CAP_NUMA_ATTACH" <username>
```

17.5 Compatibility between hwloc versions

17.5.1 How do I handle API changes?

The hwloc interface is extended with every new major release. Any application using the hwloc API should be prepared to check at compile-time whether some features are available in the currently installed hwloc distribution. For instance, to check whether the hwloc version is at least 2.0, you should use:

```
#include <hwloc.h>
#if HWLOC_API_VERSION >= 0x00020000
...
#endif
```

To check for the API of release X.Y.Z at build time, you may compare HWLOC_API_VERSION with (X << 16) + (Y << 8) + Z.

For supporting older releases that do not have HWLOC_OBJ_NUMANODE and HWLOC_OBJ_PACKAGE yet, you may use:

```
#include <hwloc.h>
#if HWLOC_API_VERSION < 0x00010b00
#define HWLOC_OBJ_NUMANODE HWLOC_OBJ_NODE
#define HWLOC_OBJ_PACKAGE HWLOC_OBJ_SOCKET
#endif</pre>
```

Once a program is built against a hwloc library, it may also dynamically link with compatible libraries from other hwloc releases. The version of that runtime library may be queried with hwloc_get_api_version(). See How do I handle ABI breaks? for using this function for testing ABI compatibility.

17.5.2 What is the difference between API and library version numbers?

HWLOC_API_VERSION is the version of the API. It changes when functions are added, modified, etc. However it does not necessarily change from one release to another. For instance, two releases of the same series (e.g. 2.0.3 and 2.0.4) usually have the same HWLOC_API_VERSION (0x00020000). However their HWLOC_VERSION strings are different ("2.0.3" and "2.0.4" respectively).

17.5.3 How do I handle ABI breaks?

The hwloc interface was deeply modified in release 2.0 to fix several issues of the 1.x interface (see Upgrading to the hwloc 2.0 API and the NEWS file in the source directory for details). The ABI was broken, which means applications must be recompiled against the new 2.0 interface.

To check that you are not mixing old/recent headers with a recent/old runtime library, check the major revision number in the API version:

To specifically detect v2.0 issues:

```
#include <hwloc.h>
#if HWLOC_API_VERSION >= 0x00020000
   /* headers are recent */
   if (hwloc_get_api_version() < 0x20000)
        ... error out, the hwloc runtime library is older than 2.0 ...
#else
   /* headers are pre-2.0 */
   if (hwloc_get_api_version() >= 0x20000)
        ... error out, the hwloc runtime library is more recent than 2.0 ...
#endif
```

In theory, library sonames prevent linking with incompatible libraries. However custom hwloc installations or improperly configured build environments may still lead to such issues. Hence running one of the above (cheap) checks before initializing hwloc topology may be useful.

17.5.4 Are XML topology files compatible between hwloc releases?

XML topology files are forward-compatible: a XML file may be loaded by a hwloc library that is more recent than the hwloc release that exported that file.

However, hwloc XMLs are not always backward-compatible: Topologies exported by hwloc 2.x cannot be imported by 1.x by default (see XML changes for working around such issues). There are also some corner cases where backward compatibility is not guaranteed because of changes between major releases (for instance 1.11 XMLs could not be imported in 1.10).

XMLs are exchanged at runtime between some components of the HPC software stack (for instance the resource managers and MPI processes). Building all these components on the same (cluster-wide) hwloc installation is a good way to avoid such incompatibilities.

17.5.5 Are synthetic strings compatible between hwloc releases?

Synthetic strings (see Synthetic topologies) are forward-compatible: a synthetic string generated by a release may be imported by future hwloc libraries.

However they are often not backward-compatible because new details may have been added to synthetic descriptions in recent releases. Some flags may be given to hwloc_topology_export_synthetic() to avoid such details and stay backward compatible.

17.5.6 Is it possible to share a shared-memory topology between different hwloc releases?

Shared-memory topologies (see Sharing topologies between processes) have strong requirements on compatibility between hwloc libraries. Adopting a shared-memory topology fails if it was exported by a non-compatible hwloc release. Releases with same major revision are usually compatible (e.g. hwloc 2.0.4 may adopt a topology exported by 2.0.3) but different major revisions may be incompatible (e.g. hwloc 2.1.0 cannot adopt from 2.0.x).

Topologies are shared at runtime between some components of the HPC software stack (for instance the resource managers and MPI processes). Building all these components on the same (system-wide) hwloc installation is a good way to avoid such incompatibilities.

Upgrading to the hwloc 2.0 API

See Compatibility between hwloc versions for detecting the hwloc version that you are compiling and/or running against.

18.1 New Organization of NUMA nodes and Memory

18.1.1 Memory children

In hwloc v1.x, NUMA nodes were inside the tree, for instance Packages contained 2 NUMA nodes which contained a L3 and several cache.

Starting with hwloc v2.0, NUMA nodes are not in the main tree anymore. They are attached under objects as *Memory Children* on the side of normal children. This memory children list starts at obj->memory_first_child and its size is obj->memory_arity. Hence there can now exist two local NUMA nodes, for instance on Intel Xeon Phi processors.

The normal list of children (starting at obj->first_child, ending at obj->last_child, of size obj->arity, and available as the array obj->children) now only contains CPU-side objects: PUs, Cores, Packages, Caches, Groups, Machine and System. hwloc_get_next_child() may still be used to iterate over all children of all lists.

Hence the CPU-side hierarchy is built using normal children, while memory is attached to that hierarchy depending on its affinity.

18.1.2 Examples

 a UMA machine with 2 packages and a single NUMA node is now modeled as a "Machine" object with two "Package" children and one "NUMANode" memory children (displayed first in Istopo below):

```
Machine (1024MB total)

NUMANode L#0 (P#0 1024MB)

Package L#0

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Package L#1

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)
```

• a machine with 2 packages with one NUMA node and 2 cores in each is now:

```
Machine (2048MB total)

Package L#0

NUMANode L#0 (P#0 1024MB)

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Package L#1

NUMANode L#1 (P#1 1024MB)

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)
```

 if there are two NUMA nodes per package, a Group object may be added to keep cores together with their local NUMA node:

```
Machine (4096MB total)

Package L#0

Group0 L#0

NUMANode L#0 (P#0 1024MB)

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Group0 L#1

NUMANode L#1 (P#1 1024MB)

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)

Package L#1

[...]
```

• if the platform has L3 caches whose localities are identical to NUMA nodes, Groups aren't needed:

```
Machine (4096MB total)

Package L#0

L3 L#0 (16MB)

NUMANode L#0 (P#0 1024MB)

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

L3 L#1 (16MB)

NUMANode L#1 (P#1 1024MB)

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)

Package L#1

[...]
```

18.1.3 NUMA level and depth

NUMA nodes are not in "main" tree of normal objects anymore. Hence, they don't have a meaningful depth anymore (like I/O and Misc objects). They have a virtual (negative) depth (HWLOC_TYPE_DEPTH_NUMANODE) so that functions manipulating depths and level still work, and so that we can still iterate over the level of NUMA nodes just like for any other level.

For instance we can still use lines such as

```
int depth = hwloc_get_type_depth(topology, HWLOC_OBJ_NUMANODE);
hwloc_obj_t obj = hwloc_get_obj_by_type(topology, HWLOC_OBJ_NUMANODE, 4);
hwloc_obj_t node = hwloc_get_next_obj_by_depth(topology, HWLOC_TYPE_DEPTH_NUMANODE, prev);
```

The NUMA depth should not be compared with others. An unmodified code that still compares NUMA and Package depths (to find out whether Packages contain NUMA or the contrary) would now always assume Packages contain NUMA (because the NUMA depth is negative).

18.1.4 Finding Local NUMA nodes and looking at Children and Parents

Applications that walked up/down to find NUMANode parent/children must now be updated. Instead of looking directly for a NUMA node, one should now look for an object that has some memory children. NUMA node(s) will be attached there. For instance, when looking for a NUMA node above a given core core:

```
hwloc_obj_t parent = core->parent;
while (parent && !parent->memory_arity)
  parent = parent->parent; /* no memory child, walk up */
if (parent)
  /* use parent->memory_first_child (and its siblings if there are multiple local NUMA nodes) */
```

The list of local NUMA nodes (usually a single one) is also described by the nodeset attribute of each object (which contains the physical indexes of these nodes). Iterating over the NUMA level is also an easy way to find local NUMA nodes:

```
hwloc_obj_t tmp = NULL;
while ((tmp = hwloc_get_next_obj_by_type(topology, HWLOC_OBJ_NUMANODE, tmp)) != NULL) {
  if (hwloc_bitmap_isset(obj->nodeset, tmp->os_index))
    /* tmp is a NUMA node local to obj, use it */
}
```

Similarly finding objects that are close to a given NUMA nodes should be updated too. Instead of looking at the NUMA node parents/children, one should now find a Normal parent above that NUMA node, and then look at its parents/children as usual:

```
hwloc_obj_t tmp = obj->parent;
while (hwloc_obj_type_is_memory(tmp))
  tmp = tmp->parent;
/* now use tmp instead of obj */
```

To avoid such hwloc v2.x-specific and NUMA-specific cases in the code, a **generic lookup for any kind of object, including NUMA nodes**, might also be implemented by iterating over a level. For instance finding an object of type type which either contains or is included in object obj can be performed by traversing the level of that type and comparing CPU sets:

```
hwloc_obj_t tmp = NULL;
while ((tmp = hwloc_get_next_obj_by_type(topology, type, tmp)) != NULL) {
  if (hwloc_bitmap_intersects(tmp->cpuset, obj->cpuset))
    /* tmp matches, use it */
}
```

This generic lookup works whenever type or obj are Normal or Memory objects since both have CPU sets. Moreover, it is compatible with the hwloc v1.x API.

18.2 4 Kinds of Objects and Children

18.2.1 I/O and Misc children

I/O children are not in the main object children list anymore either. They are in the list starting at obj->io_ children list anymore either. They are in the list starting at obj->io_ children list anymore either. They are in the list starting at obj->io_ children list anymore either.

Misc children are not in the main object children list anymore. They are in the list starting at obj->misc_← first_child and its size is obj->misc_arity.

See hwloc obj for details about children lists.

hwloc get next child() may still be used to iterate over all children of all lists.

18.2.2 Kinds of objects

Given the above, objects may now be of 4 kinds:

- · Normal (everything not listed below, including Machine, Package, Core, PU, CPU Caches, etc);
- Memory (currently NUMA nodes or Memory-side Caches), attached to parents as Memory children;
- I/O (Bridges, PCI and OS devices), attached to parents as I/O children;
- · Misc objects, attached to parents as Misc children.

See hwloc_obj for details about children lists.

For a given object type, the kind may be found with hwloc_obj_type_is_normal(), hwloc_obj_type_is_memory(), hwloc_obj_type_is_normal(), or comparing with HWLOC_OBJ_MISC.

Normal and Memory objects have (non-NULL) CPU sets and nodesets, while I/O and Misc objects don't have any sets (they are NULL).

18.3 HWLOC_OBJ_CACHE replaced

Instead of a single HWLOC_OBJ_CACHE, there are now 8 types HWLOC_OBJ_L1CACHE, ..., HWLOC_OBJ_L5CACHE, HWLOC_OBJ_L1ICACHE, ..., HWLOC_OBJ_L3ICACHE.

Cache object attributes are unchanged.

hwloc_get_cache_type_depth() is not needed to disambiguate cache types anymore since new types can be passed to hwloc_get_type_depth() without ever getting HWLOC_TYPE_DEPTH_MULTIPLE anymore.

hwloc_obj_type_is_cache(), hwloc_obj_type_is_dcache() and hwloc_obj_type_is_icache() may be used to check whether a given type is a cache, data/unified cache or instruction cache.

18.4 allowed cpuset and allowed nodeset only in the main topology

Objects do not have allowed_cpuset and allowed_nodeset anymore. They are only available for the entire topology using hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset(). As usual, those are only needed when the INCLUDE_DISALLOWED topology flag is given, which means disallowed objects are kept in the topology. If so, one may find out whether some PUs inside an object is allowed by checking

```
hwloc_bitmap_intersects(obj->cpuset, hwloc_topology_get_allowed_cpuset(topology))
```

Replace cpusets with nodesets for NUMA nodes. To find out which ones, replace intersects() with and() to get the actual intersection.

18.5 Object depths are now signed int

obj->depth as well as depths given to functions such as hwloc_get_obj_by_depth() or returned by hwloc topology get depth() are now signed int.

Other depth such as cache-specific depth attribute are still unsigned.

18.6 Memory attributes become NUMANode-specific

Memory attributes such as obj->memory.local_memory are now only available in NUMANode-specific attributes in obj->attr->numanode.local_memory. obj->memory.total_memory is available in all objects as obj->total_memory.

See hwloc_obj_attr_u::hwloc_numanode_attr_s and hwloc_obj for details.

18.7 Topology configuration changes

The old ignoring API as well as several configuration flags are replaced with the new filtering API, see hwloc topology set type filter() and its variants, and hwloc type filter e for details.

hwloc_topology_ignore_type(), hwloc_topology_ignore_type_keep_structure() and hwloc_topology_ignore
 —all_keep_structure() are respectively superseded by

```
hwloc_topology_set_type_filter(topology, type, HWLOC_TYPE_FILTER_KEEP_NONE); hwloc_topology_set_type_filter(topology, type, HWLOC_TYPE_FILTER_KEEP_STRUCTURE); hwloc_topology_set_all_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_STRUCTURE);
```

Also, the meaning of KEEP_STRUCTURE has changed (only entire levels may be ignored, instead of single objects), the old behavior is not available anymore.

· HWLOC TOPOLOGY FLAG ICACHES is superseded by

```
hwloc_topology_set_icache_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_ALL);
```

HWLOC_TOPOLOGY_FLAG_WHOLE_IO, HWLOC_TOPOLOGY_FLAG_IO_DEVICES and HWLOC_

TOPOLOGY_FLAG_IO_BRIDGES replaced.

To keep all I/O devices (PCI, Bridges, and OS devices), use:

```
hwloc_topology_set_io_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_ALL);
```

To only keep important devices (Bridges with children, common PCI devices and OS devices):

```
hwloc_topology_set_io_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_IMPORTANT);
```

18.8 XML changes

2.0 XML files are not compatible with 1.x

2.0 can load 1.x files, but only NUMA distances are imported. Other distance matrices are ignored (they were never used by default anyway).

2.0 can export 1.x-compatible files, but only distances attached to the root object are exported (i.e. distances that cover the entire machine). Other distance matrices are dropped (they were never used by default anyway).

Users are advised to negociate hwloc versions between exporter and importer: If the importer isn't 2.x, the exporter should export to 1.x. Otherwise, things should work by default.

Hence hwloc_topology_export_xml() and hwloc_topology_export_xmlbuffer() have a new flags argument. to force a hwloc-1.x-compatible XML export.

- · If both always support 2.0, don't pass any flag.
- When the importer uses hwloc 1.x, export with HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1. Otherwise the importer will fail to import.
- When the exporter uses hwloc 1.x, it cannot pass any flag, and a 2.0 importer can import without problem.

```
#if HWLOC_API_VERSION >= 0x20000
   if (need 1.x compatible XML export)
      hwloc_topology_export_xml(...., HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1);
   else /* need 2.x compatible XML export */
      hwloc_topology_export_xml(...., 0);
#else
   hwloc_topology_export_xml(....);
#endif
```

Additionally, hwloc_topology_diff_load_xml(), hwloc_topology_diff_load_xmlbuffer(), hwloc_topology_diff_export_xml(), hwloc_topology_diff_export_xmlbuffer() and hwloc_topology_diff_destroy() lost the topology argument: The first argument (topology) isn't needed anymore.

18.9 Distances API totally rewritten

The new distances API is in hwloc/distances.h.

Distances are not accessible directly from objects anymore. One should first call hww.number.get() (or a variant) to retrieve distances (possibly with one call to get the number of available distances structures, and another call to actually get them). Then it may consult these structures, and finally release them.

The set of object involved in a distances structure is specified by an array of objects, it may not always cover the entire machine or so.

18.10 Return values of functions

Bitmap functions (and a couple other functions) can return errors (in theory).

Most bitmap functions may have to reallocate the internal bitmap storage. In v1.x, they would silently crash if realloc failed. In v2.0, they now return an int that can be negative on error. However, the preallocated storage is 512 bits, hence realloc will not even be used unless you run hwloc on machines with larger PU or NUMAnode indexes. hwloc_obj_add_info(), hwloc_cpuset_from_nodeset() and hwloc_cpuset_from_nodeset() also return an int, which would be -1 in case of allocation errors.

18.11 Misc API changes

- hwloc_type_sscanf() extends hwloc_obj_type_sscanf() by passing a union hwloc_obj_attr_u which may receive Cache, Group, Bridge or OS device attributes.
- hwloc_type_sscanf_as_depth() is also added to directly return the corresponding level depth within a topology.
- hwloc_topology_insert_misc_object_by_cpuset() is replaced with hwloc_topology_alloc_group_object() and hwloc_topology_insert_group_object().
- hwloc_topology_insert_misc_object_by_parent() is replaced with hwloc_topology_insert_misc_object().

18.12 API removals and deprecations

- · HWLOC_OBJ_SYSTEM removed: The root object is always HWLOC_OBJ_MACHINE
- _membind_nodeset() memory binding interfaces deprecated: One should use the variant without _nodeset suffix and pass the HWLOC MEMBIND BYNODESET flag.
- HWLOC_MEMBIND_REPLICATE removed: no supported operating system supports it anymore.
- hwloc_obj_snprintf() removed because it was long-deprecated by hwloc_obj_type_snprintf() and hwloc_obj_attr_snprintf().
- hwloc obj type sscanf() deprecated, hwloc obj type of string() removed.
- hwloc_cpuset_from/to_nodeset_strict() deprecated: Now useless since all topologies are NUMA. Use the variant without the strict suffix
- hwloc_distribute() and hwloc_distributev() removed, deprecated by hwloc_distrib().
- The Custom interface (hwloc_topology_set_custom(), etc.) was removed, as well as the corresponding command-line tools (hwloc-assembler, etc.). Topologies always start with object with valid cpusets and nodesets.
- obj->online_cpuset removed: Offline PUs are simply listed in the complete_cpuset as previously.
- obj->os_level removed.

Network Locality (netloc)


Portable abstraction of network topologies for high-performance computing. The netloc documentation spans of these sections:

- · Network Locality (netloc), this section below
- · Netloc with Scotch

19.1 Netloc Summary

The Portable Network Locality (netloc) software package provides network topology discovery tools, and an abstract representation of those networks topologies for a range of network types and configurations. It is provided as a companion to the Portable Hardware Locality (hwloc) package. These two software packages work together to provide a comprehensive view of the HPC system topology, spanning from the processor cores in one server to the cores in another - including the complex network(s) in between.

Towards this end, netloc is divided into two sets of components. The first tools are for the admin to extract the information about the topology of the machines with topology discovery tools for each network type and discovery technique (called readers). The second set of tools is for the user to exploit the collected information: to display the topology or create a topology-aware mapping of the processes of an application.

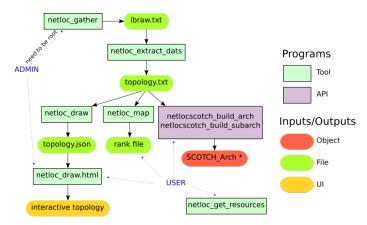

19.1.1 Supported Networks

For now, only InfiniBand (See Setup) is supported, but it is planned to be extended it very soon.

19.2 Netloc Installation

The generic installation procedure for both hwloc and netloc is described in Installation.

Note that netloc is currently not supported on as many platforms as the original hwloc project. netloc is enabled by default when supported, or can be disabled by passing --disable-netloc to the configure command-line.

19.3 Setup

To use Netloc tools, we need two steps. The first step consists in getting information about network directly from tools distributed by manufacturers. For Infiniband, for instance, this operation needs privileges to access to the network device. For this step we have wrappers in Netloc that will call the right tools with the right options.

The second step will transform the raw files generated by manufacturer tools, into files in a format readable by Netloc tools, and that will not depend on network technologies.

To be clear, let's take an example with Infiniband. This first step is handled by netloc_ib_gather_raw that will call ibnetdiscover and ibroutes tools to generate the necessary raw data files. The step has to be run by an administrator, since the Infiniband tools need to access to the network device.

```
shell$ netloc_ib_gather_raw --help
Usage: netloc_ib_gather_raw [options] <outdir>
 Dumps topology information to <outdir>/ib-raw/
  Subnets are guessed from the <outdir>/hwloc/ directory where
  the hwloc XML exports of some nodes are stored.
Options:
  -sudo
   Pass sudo to internal ibnetdiscover and ibroute invocations.
    Useful when the entire script cannot run as root.
 --hwloc-dir <dir>
   Use <dir> instead of <outdir>/hwloc/ for hwloc XML exports.
 --force-subnet [<subnet>:]<board>:<port> to force the discovery
   Do not guess subnets from hwloc XML exports.
   Force discovery on local board <board> port <port>
    and optionally force the subnet id <subnet>
    instead of reading it from the first GID.
   Examples: --force-subnet mlx4_0:1
             --force-subnet fe80:0000:0000:0000:mlx4_0:1
 --ibnetdiscover /path/to/ibnetdiscover
 --ibroute /path/to/ibroute
   Specify exact location of programs. Default is /usr/bin/<program>
 --sleep <n>
   Sleep for <n> seconds between invocations of programs probing the network
 --ignore-errors
   Ignore errors from ibnetdiscover and ibroute, assume their outputs are ok
 --force -f
   Always rediscover to overwrite existing files without asking
  -verbose -v
   Add verbose messages
 --dry-run
   Do not actually run programs or modify anything
 --help -h
   Show this help
shell$ ./netloc_ib_gather_raw /home/netloc/data
WARNING: Not running as root.
Using /home/netloc/data/hwloc as hwloc lstopo XML directory.
Exporting local node hwloc XML...
  Running lstopo-no-graphics...
Found 1 subnets in hwloc directory:
Subnet fe80:0000:0000:0000 is locally accessible from board qib0 port 1.
Looking at fe80:0000:0000:0000 (through local board gib0 port 1)...
Running ibnetdiscover...
 Getting routes...
 Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L112' LID 18...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L108' LID 20...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L102' LID 23...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L104' LID 25...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L106' LID 24...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L114' LID 22...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L116' LID 21...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L109' LID 12...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L111' LID 11...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L107' LID 13...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L103' LID 17...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L105' LID 16...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L113' LID 15...
```

19.4 Topology display 73

The second step, that can be done by a regular user, is done by the tool netloc_ib_extract_dats.

19.4 Topology display

Netloc provides a tool, netloc_draw.html, that displays a topology in a web browser, by using a JSON file.

19.4.1 Generate the JSON file

In order to display a topology, Netloc needs to generate a JSON file corresponding to a topology. For this operation, the user must run netloc_draw_to_json.


```
shell$ netloc_draw_to_json --help
Usage: netloc_draw_to_json <path to topology directory>
shell$ netloc_draw_to_json /home/netloc/data/netloc
```

The netloc_draw_to_json command will write a JSON file for each topology file found in the input directory. The output files, written also in the input directory, can be open by netloc_draw.html in a web browser.

19.4.2 Using netloc_draw

Once the JSON file is opened, the rendering is generated by the Javascript vis library for computing the position of the nodes. From the interface, it is possible to search for a specific node, to color the nodes, to expand merged switches, to show statistics, to export as an image... The user can interact with the nodes by moving them. For now, there are bugs and other nodes might move too.

The placement of the nodes is done statically if the topology is detected as a tree. If not, vis.js will use physics to find good positions, and it can be very time consuming.

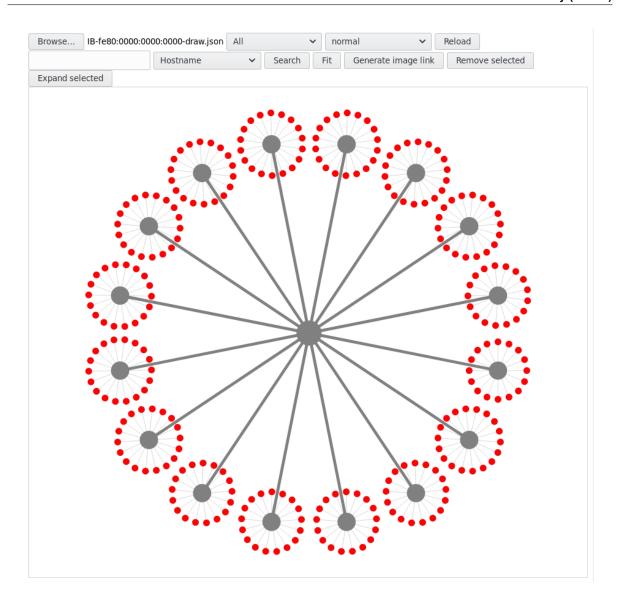

Netloc with Scotch

Scotch is a toolbox for graph partitioning [XXX], that can do mapping between a communication graph and an architecture. Netloc interfaces with Scotch, by getting the topology of the machine and building the Scotch architecture. It is also possible to directly build a mapping file that can be given to mpirun.

20.1 Introduction

Scotch is able to deal architectures to represent the topology of a complete machine. Scotch handles several types of topologies: complete graphs, hypercubes, fat trees, meshes, torus, and random graphs. Moreover, Scotch is able to manage parts of architectures that are called sub-architectures. Thus, from a complete architecture, we can create a sub-architecture that will represent the available resources of the complete machine.

20.2 Setup

The first step in order to use Netloc tools is to discover the network. For this task, we provide tools called netloc—gather that are wrappers to the dedicated tools provided by the manufacturer of the network, that generate the raw data given by the devices. This task needs privileges to access to the network devices. Once, this task is completed, the raw data is converted in a generic format independent to the fabric by extract_dats. Figure 1 shows how the different modules of Netloc are linked, and what are the tools provided by Netloc.

20.3 Tools and API

When the machine is discovered and all the needed files are generated as seen previously, a user can call the netlocscotch functions from the API and interact with Scotch.

20.3.1 Build Scotch architectures

Netloc provides a function to export the built topology into the Scotch format. That will give the possibility to the user to play with the topology in Scotch. Since Netloc matches the discovered topology with known topologies, the Scotch architecture won't be random graphs but known topologies also in Scotch that will lead to optimized graph algorithms. This function is called netlocscotch_build_arch.

When the network topology is a tree, the topology converted by netlocscotch is the complete topology of the machine containing intranode topologies from hwloc. In this case, merging the two levels results in a bigger tree. For other network topologies, the global graph created for Scotch is a generic graph since it not not (at this moment) possible to create nested known architectures.

20.3.2 Build Scotch sub-architectures

Most of the time, the user does not have access to the complete machine. He uses a resource manager to run his application and he will gain access only to a set of nodes. In this case getting the Scotch architecture of the complete machine is not relevant. Fortunately, Netloc is also able to build a Scotch sub-architecture that will contain only the available nodes. For this operation the user needs to run a specific program, netloc get resources, that will

76 Netloc with Scotch

record in a file, the lists of available nodes and available cores by using MPI and hwloc. From this file, the function netlocscotch build subarch will build the Scotch sub-architecture.

20.3.3 Mapping of processes

A main goal in having all these data about the network topology, especially in Scotch structures, is to help the process placement. For that, we use the mapping of a process graph to the architecture provided by Scotch. As we have seen previously, Netloc is able to detect the structure of the topology and will build the adapted Scotch architecture that will be more efficient than a random structure.

In case, the network topology is not a tree, netlocscotch converts the complete topology into a generic graph. The drawback in that is the Scotch graph algorithms are less efficient. To overcome that, netlocscotch does two steps of mapping: first it maps the processes to the nodes, and then for each node maps the processes to the cores. We have to conduct tests to check if the method gives better results than using a generic graph directly.

The other input needed in Scotch is the process graph. Since we want to optimize the placement to decrease the communication time, a good metric for building the application graph is the amount of communications between all pairs of processes. Studies still have to be done to choose, in the most efficient way, what we take into account to define the amount of communications between the number of messages, the size of messages... This information will be transformed into a process graph.

Once we have a good mapping computed by Scotch, we can give it to the user, or Netloc can even generate the corresponding rank file useful to MPI.

Module Index

21.1 Modules

Here is a list of all modules:	
API version	81
Object Sets (hwloc_cpuset_t and hwloc_nodeset_t)	82
Object Types	82
Object Structure and Attributes	87
Topology Creation and Destruction	87
Object levels, depths and types	90
Converting between Object Types and Attributes, and Strings	93
Consulting and Adding Key-Value Info Attributes	95
CPU binding	96
Memory binding	100
Changing the Source of Topology Discovery	107
	109
Modifying a loaded Topology	
Finding Objects inside a CPU set	
Finding Objects covering at least CPU set	
Looking at Ancestor and Child Objects	
Kinds of object Type	
Looking at Cache Objects	
Finding objects, miscellaneous helpers	
Distributing items over a topology	
CPU and node sets of entire topologies	
Converting between CPU sets and node sets	
Finding I/O objects	
The bitmap API	
Exporting Topologies to XML	
Exporting Topologies to Synthetic	
Retrieve distances between objects	
Helpers for consulting distance matrices	
Add distances between objects	
Remove distances between objects	
Comparing memory node attributes for finding where to allocate on	
Managing memory attributes	
Kinds of CPU cores	
Linux-specific helpers	
Interoperability with Linux libnuma unsigned long masks	
Interoperability with Linux libnuma bitmask	
Windows-specific helpers	
Interoperability with glibc sched affinity	
Interoperability with OpenCL	
Interporability with the CLIDA Driver API	177

78 Module Index

Interoperability with the CUDA Runtime API
Interoperability with the NVIDIA Management Library
Interoperability with the ROCm SMI Management Library
Interoperability with the oneAPI Level Zero interface
Interoperability with OpenGL displays
Interoperability with OpenFabrics
Topology differences
Sharing topologies between processes
Components and Plugins: Discovery components
Components and Plugins: Discovery backends
Components and Plugins: Generic components
Components and Plugins: Core functions to be used by components
Components and Plugins: Filtering objects
Components and Plugins: helpers for PCI discovery
Components and Plugins: finding PCI objects during other discoveries
Netloc API 201

Data Structure Index

22.1 Data Structures

Here are the data structures with brief descriptions:	
hwloc_backend	
Discovery backend structure	203
hwloc_obj_attr_u::hwloc_bridge_attr_s	
Bridge specific Object Attribues	204
hwloc obj attr u::hwloc cache attr s	
Cache-specific Object Attributes	206
hwloc cl device topology amd	
hwloc_component	
Generic component structure	208
hwloc_disc_component	
Discovery component structure	209
hwloc disc status	
Discovery status structure	210
hwloc_distances_s	
Matrix of distances between a set of objects	211
hwloc_obj_attr_u::hwloc_group_attr_s	
Group-specific Object Attributes	212
hwloc_info_s	
Object info	213
hwloc_location	
Where to measure attributes from	213
hwloc location::hwloc location u	
Actual location	214
hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s	
Array of local memory page types, NULL if no local memory and page_types is 0	214
hwloc obj attr u::hwloc numanode attr s	
NUMA node-specific Object Attributes	215
hwloc obj	
Structure of a topology object	216
hwloc_obj_attr_u	
Object type-specific Attributes	221
hwloc_obj_attr_u::hwloc_osdev_attr_s	
OS Device specific Object Attributes	222
hwloc obj attr u::hwloc pcidev attr s	
PCI Device specific Object Attributes	223
hwloc_topology_cpubind_support	
Flags describing actual PU binding support for this topology	224
hwloc_topology_diff_u::hwloc_topology_diff_generic_s	
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s	226
hwloc topology diff unthwloc topology diff objects	

80 Data Structure Index

hwloc_topology_dift_obj_attr_u::hwloc_topology_dift_obj_attr_string_s	
String attribute modification with an optional name	227
hwloc_topology_diff_obj_attr_u	
One object attribute difference	228
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s	
Integer attribute modification with an optional index	229
hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s	229
hwloc_topology_diff_u	
One element of a difference list between two topologies	230
hwloc_topology_discovery_support	
Flags describing actual discovery support for this topology	231
hwloc_topology_membind_support	
Flags describing actual memory binding support for this topology	232
hwloc_topology_misc_support	
Flags describing miscellaneous features	234
hwloc_topology_support	
Set of flags describing actual support for this topology	234

Module Documentation

23.1 API version

Macros

- #define HWLOC_API_VERSION 0x00020500
- #define HWLOC_COMPONENT_ABI 7

Functions

unsigned hwloc_get_api_version (void)

23.1.1 Detailed Description

23.1.2 Macro Definition Documentation

23.1.2.1 HWLOC_API_VERSION

```
#define HWLOC_API_VERSION 0x00020500
```

Indicate at build time which hwloc API version is being used.

This number is updated to (X << 16)+(Y << 8)+Z when a new release X.Y.Z actually modifies the API.

Users may check for available features at build time using this number (see How do I handle API changes?).

Note

This should not be confused with HWLOC_VERSION, the library version. Two stable releases of the same series usually have the same HWLOC_API_VERSION even if their HWLOC_VERSION are different.

23.1.2.2 HWLOC_COMPONENT_ABI

```
#define HWLOC_COMPONENT_ABI 7
```

Current component and plugin ABI version (see hwloc/plugins.h)

23.1.3 Function Documentation

23.1.3.1 hwloc_get_api_version()

Indicate at runtime which hwloc API version was used at build time.

Should be HWLOC_API_VERSION if running on the same version.

82 Module Documentation

23.2 Object Sets (hwloc cpuset t and hwloc nodeset t)

Typedefs

- typedef hwloc_bitmap_t hwloc_cpuset_t
- · typedef hwloc const bitmap t hwloc const cpuset t
- typedef hwloc_bitmap_t hwloc_nodeset_t
- · typedef hwloc const bitmap thwloc const nodeset t

23.2.1 Detailed Description

Hwloc uses bitmaps to represent two distinct kinds of object sets: CPU sets (hwloc_cpuset_t) and NUMA node sets (hwloc_nodeset_t). These types are both typedefs to a common back end type (hwloc_bitmap_t), and therefore all the hwloc bitmap functions are applicable to both hwloc_cpuset_t and hwloc_nodeset_t (see The bitmap API).

The rationale for having two different types is that even though the actions one wants to perform on these types are the same (e.g., enable and disable individual items in the set/mask), they're used in very different contexts: one for specifying which processors to use and one for specifying which NUMA nodes to use. Hence, the name difference is really just to reflect the intent of where the type is used.

23.2.2 Typedef Documentation

23.2.2.1 hwloc_const_cpuset_t

```
typedef hwloc_const_bitmap_t hwloc_const_cpuset_t
A non-modifiable hwloc_cpuset_t.
```

23.2.2.2 hwloc_const_nodeset_t

```
typedef hwloc_const_bitmap_t hwloc_const_nodeset_t A non-modifiable hwloc nodeset t.
```

23.2.2.3 hwloc_cpuset_t

```
typedef hwloc_bitmap_t hwloc_cpuset_t
```

A CPU set is a bitmap whose bits are set according to CPU physical OS indexes.

It may be consulted and modified with the bitmap API as any hwloc_bitmap_t (see hwloc/bitmap.h).

Each bit may be converted into a PU object using hwloc_get_pu_obj_by_os_index().

23.2.2.4 hwloc_nodeset_t

```
typedef hwloc_bitmap_t hwloc_nodeset_t
```

A node set is a bitmap whose bits are set according to NUMA memory node physical OS indexes.

It may be consulted and modified with the bitmap API as any hwloc_bitmap_t (see hwloc/bitmap.h). Each bit may be converted into a NUMA node object using hwloc_get_numanode_obj_by_os_index().

When binding memory on a system without any NUMA node, the single main memory bank is considered as NUMA node #0.

See also Converting between CPU sets and node sets.

23.3 Object Types

Macros

#define HWLOC_TYPE_UNORDERED

23.3 Object Types 83

Typedefs

- typedef enum hwloc_obj_cache_type_e hwloc_obj_cache_type_t
- typedef enum hwloc obj bridge type e hwloc obj bridge type t
- typedef enum hwloc_obj_osdev_type_e hwloc_obj_osdev_type_t

Enumerations

```
enum hwloc_obj_type_t {
    HWLOC_OBJ_MACHINE, HWLOC_OBJ_PACKAGE, HWLOC_OBJ_CORE, HWLOC_OBJ_PU,
    HWLOC_OBJ_L1CACHE, HWLOC_OBJ_L2CACHE, HWLOC_OBJ_L3CACHE, HWLOC_OBJ_L4CACHE
    ,
    HWLOC_OBJ_L5CACHE, HWLOC_OBJ_L1ICACHE, HWLOC_OBJ_L2ICACHE, HWLOC_OBJ_L3ICACHE
    ,
    HWLOC_OBJ_GROUP, HWLOC_OBJ_NUMANODE, HWLOC_OBJ_BRIDGE, HWLOC_OBJ_PCI_DEVICE
    ,
    HWLOC_OBJ_OS_DEVICE, HWLOC_OBJ_MISC, HWLOC_OBJ_MEMCACHE, HWLOC_OBJ_DIE,
    HWLOC_OBJ_TYPE_MAX }

enum hwloc_obj_cache_type_e { HWLOC_OBJ_CACHE_UNIFIED , HWLOC_OBJ_CACHE_DATA ,
    HWLOC_OBJ_CACHE_INSTRUCTION }
enum hwloc_obj_bridge_type_e { HWLOC_OBJ_BRIDGE_HOST, HWLOC_OBJ_BRIDGE_PCI }
enum hwloc_obj_osdev_type_e {
    HWLOC_OBJ_OSDEV_BLOCK , HWLOC_OBJ_OSDEV_GPU , HWLOC_OBJ_OSDEV_NETWORK ,
    HWLOC_OBJ_OSDEV_DMA, HWLOC_OBJ_OSDEV_COPROC }
```

Functions

• int hwloc_compare_types (hwloc_obj_type_t type1, hwloc_obj_type_t type2)

23.3.1 Detailed Description

23.3.2 Macro Definition Documentation

23.3.2.1 HWLOC TYPE UNORDERED

```
#define HWLOC_TYPE_UNORDERED
```

Value returned by hwloc_compare_types() when types can not be compared.

23.3.3 Typedef Documentation

23.3.3.1 hwloc_obj_bridge_type_t

```
typedef enum hwloc_obj_bridge_type_e hwloc_obj_bridge_type_t Type of one side (upstream or downstream) of an I/O bridge.
```

23.3.3.2 hwloc_obj_cache_type_t

```
typedef enum hwloc_obj_cache_type_e hwloc_obj_cache_type_t Cache type.
```

23.3.3.3 hwloc_obj_osdev_type_t

typedef enum hwloc_obj_osdev_type_e hwloc_obj_osdev_type_t Type of a OS device.

23.3.4 Enumeration Type Documentation

23.3.4.1 hwloc_obj_bridge_type_e

enum hwloc_obj_bridge_type_e

Type of one side (upstream or downstream) of an I/O bridge.

Enumerator

HWLOC_OBJ_BRIDGE_HOST	Host-side of a bridge, only possible upstream.
HWLOC_OBJ_BRIDGE_PCI	PCI-side of a bridge.

23.3.4.2 hwloc_obj_cache_type_e

enum hwloc_obj_cache_type_e

Cache type.

Enumerator

HWLOC_OBJ_CACHE_UNIFIED	Unified cache.
HWLOC_OBJ_CACHE_DATA	Data cache.
HWLOC_OBJ_CACHE_INSTRUCTION	Instruction cache (filtered out by default).

23.3.4.3 hwloc_obj_osdev_type_e

enum hwloc_obj_osdev_type_e

Type of a OS device.

HWLOC_OBJ_OSDEV_BLOCK	Operating system block device, or non-volatile memory device. For instance "sda" or "dax2.0" on Linux.
HWLOC_OBJ_OSDEV_GPU	Operating system GPU device. For instance ":0.0" for a GL display, "card0" for a Linux DRM device.
HWLOC_OBJ_OSDEV_NETWORK	Operating system network device. For instance the "eth0" interface on Linux.
HWLOC_OBJ_OSDEV_OPENFABRICS	Operating system openfabrics device. For instance the "mlx4_0" InfiniBand HCA, or "hfi1_0" Omni-Path interface on Linux.
HWLOC_OBJ_OSDEV_DMA	Operating system dma engine device. For instance the "dma0chan0" DMA channel on Linux.
HWLOC_OBJ_OSDEV_COPROC	Operating system co-processor device. For instance "opencl0d0" for a OpenCL device, "cuda0" for a CUDA device.

23.3 Object Types 85

23.3.4.4 hwloc_obj_type_t

enum hwloc_obj_type_t

Type of topology object.

Note

HWLOC_OBJ_MACHINE	Machine. A set of processors and memory with cache coherency. This type is always used for the root object of a topology, and never used anywhere else. Hence its parent is always NULL.
HWLOC_OBJ_PACKAGE	Physical package. The physical package that usually gets inserted into a socket on the motherboard. A processor package usually contains multiple cores, and possibly some dies.
HWLOC_OBJ_CORE	Core. A computation unit (may be shared by several PUs, aka logical processors).
HWLOC_OBJ_PU	Processing Unit, or (Logical) Processor. An execution unit (may share a core with some other logical processors, e.g. in the case of an SMT core). This is the smallest object representing CPU resources, it cannot have any child except Misc objects. Objects of this kind are always reported and can thus be used as fallback when others are not.
HWLOC_OBJ_L1CACHE	Level 1 Data (or Unified) Cache.
HWLOC_OBJ_L2CACHE	Level 2 Data (or Unified) Cache.
HWLOC_OBJ_L3CACHE	Level 3 Data (or Unified) Cache.
HWLOC_OBJ_L4CACHE	Level 4 Data (or Unified) Cache.
HWLOC_OBJ_L5CACHE	Level 5 Data (or Unified) Cache.
HWLOC_OBJ_L1ICACHE	Level 1 instruction Cache (filtered out by default).
HWLOC_OBJ_L2ICACHE	Level 2 instruction Cache (filtered out by default).
HWLOC_OBJ_L3ICACHE	Level 3 instruction Cache (filtered out by default).
HWLOC_OBJ_GROUP	Group objects. Objects which do not fit in the above but are detected by hwloc and are useful to take into account for affinity. For instance, some operating systems expose their arbitrary processors aggregation this way. And hwloc may insert such objects to group NUMA nodes according to their distances. See also What are these Group objects in my topology?. These objects are removed when they do not bring any structure (see HWLOC_TYPE_FILTER_KEEP_STRUCTURE).
HWLOC_OBJ_NUMANODE	NUMA node. An object that contains memory that is directly and byte-accessible to the host processors. It is usually close to some cores (the corresponding objects are descendants of the NUMA node object in the hwloc tree). This is the smallest object representing Memory resources, it cannot have any child except Misc objects. However it may have Memory-side cache parents. There is always at least one such object in the topology even if the machine is not NUMA. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. NUMA nodes have a special depth HWLOC_TYPE_DEPTH_NUMANODE instead of a normal depth just like other objects in the main tree.

Enumerator

HWLOC_OBJ_BRIDGE Bridge (filtered out by default). Any bridge (or PCI switch) that connects the host or an I/O bus, to another I/O bus. Bridges are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. PCI device (filtered out by default). PCI devices are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. HWLOC_OBJ_OS_DEVICE Operating system device (filtered out by default). OS devices are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. HWLOC_OBJ_MISC Miscellaneous objects (filtered out by default). Objects without particular meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects have NULL CPU and node sets. HWLOC_OBJ_MEMCACHE HWLOC_OBJ_MEMCACHE Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This object always has at least one NUMA node as a memory child. Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This objects are not listed in the main children list, but rather in the dedicated Memory side cache (filtered out by default). A cache in front of a specific NUMA node. This objects are not listed in the ma		
unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. HWLOC_OBJ_OS_DEVICE Operating system device (filtered out by default). OS devices are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. HWLOC_OBJ_MISC Miscellaneous objects (filtered out by default). Objects without particular meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects as children, and those are in the dedicated misc children list as well. Misc objects have NULL CPU and node sets. HWLOC_OBJ_MEMCACHE Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_OBJ_DIE Die within a physical package. A subpart of the physical package, that contains	HWLOC_OBJ_BRIDGE	host or an I/O bus, to another I/O bus. Bridges are not added to the topology unless their filtering is changed (see hwloc_topology_set_io_types_filter ()). I/O objects are not listed in the main children list, but rather in the dedicated io
the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets. HWLOC_OBJ_MISC Miscellaneous objects (filtered out by default). Objects without particular meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects as children, and those are in the dedicated misc children list as well. Misc objects have NULL CPU and node sets. HWLOC_OBJ_MEMCACHE Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_TYPE_DEPTH_MEMCACHE instead of a normal depth just like other objects in the main tree. HWLOC_OBJ_DIE Die within a physical package. A subpart of the physical package, that contains	HWLOC_OBJ_PCI_DEVICE	unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io
meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects as children, and those are in the dedicated misc children list as well. Misc objects have NULL CPU and node sets. HWLOC_OBJ_MEMCACHE Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_TYPE_DEPTH_MEMCACHE instead of a normal depth just like other objects in the main tree. HWLOC_OBJ_DIE Die within a physical package. A subpart of the physical package, that contains	HWLOC_OBJ_OS_DEVICE	the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io
NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_TYPE_DEPTH_MEMCACHE instead of a normal depth just like other objects in the main tree. HWLOC_OBJ_DIE Die within a physical package. A subpart of the physical package, that contains	HWLOC_OBJ_MISC	meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects as children, and those are in the dedicated misc children list as well. Misc objects have NULL
	HWLOC_OBJ_MEMCACHE	NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_TYPE_DEPTH_MEMCACHE instead of a normal depth just like
	HWLOC_OBJ_DIE	

23.3.5 Function Documentation

23.3.5.1 hwloc_compare_types()

```
int hwloc_compare_types (
          hwloc_obj_type_t type1,
          hwloc_obj_type_t type2 )
```

Compare the depth of two object types.

Types shouldn't be compared as they are, since newer ones may be added in the future. This function returns less than, equal to, or greater than zero respectively if type1 objects usually include type2 objects, are the same as type2 objects, or are included in type2 objects. If the types can not be compared (because neither is usually contained in the other), HWLOC_TYPE_UNORDERED is returned. Object types containing CPUs can always be compared (usually, a system contains machines which contain nodes which contain packages which contain caches, which contain cores, which contain processors).

Note

HWLOC_OBJ_PU will always be the deepest, while HWLOC_OBJ_MACHINE is always the highest.

This does not mean that the actual topology will respect that order: e.g. as of today cores may also contain caches, and packages may also contain nodes. This is thus just to be seen as a fallback comparison method.

23.4 Object Structure and Attributes

Data Structures

- struct hwloc obj
- union hwloc_obj_attr_u
- struct hwloc_info_s

Typedefs

typedef struct hwloc_obj * hwloc_obj_t

23.4.1 Detailed Description

23.4.2 Typedef Documentation

23.4.2.1 hwloc_obj_t

```
typedef struct hwloc_obj* hwloc_obj_t
Convenience typedef; a pointer to a struct hwloc_obj.
```

23.5 Topology Creation and Destruction

Typedefs

typedef struct hwloc topology * hwloc topology t

Functions

- int hwloc_topology_init (hwloc_topology_t *topologyp)
- int hwloc_topology_load (hwloc_topology_t topology)
- void hwloc_topology_destroy (hwloc_topology_t topology)
- int hwloc_topology_dup (hwloc_topology_t *newtopology, hwloc_topology_t oldtopology)
- int hwloc_topology_abi_check (hwloc_topology_t topology)
- void hwloc_topology_check (hwloc_topology_t topology)

23.5.1 Detailed Description

23.5.2 Typedef Documentation

23.5.2.1 hwloc_topology_t

```
typedef struct hwloc_topology* hwloc_topology_t
Topology context.
```

To be initialized with hwloc_topology_init() and built with hwloc_topology_load().

23.5.3 Function Documentation

23.5.3.1 hwloc_topology_abi_check()

Verify that the topology is compatible with the current hwloc library.

This is useful when using the same topology structure (in memory) in different libraries that may use different hwloc installations (for instance if one library embeds a specific version of hwloc, while another library uses a default system-wide hwloc installation).

If all libraries/programs use the same hwloc installation, this function always returns success.

Returns

0 on success.

−1 with errno set to EINVAL if incompatible.

Note

If sharing between processes with hwloc_shmem_topology_write(), the relevant check is already performed inside hwloc_shmem_topology_adopt().

23.5.3.2 hwloc_topology_check()

Run internal checks on a topology structure.

The program aborts if an inconsistency is detected in the given topology.

Parameters

topology	is the topology to be checked
----------	-------------------------------

Note

This routine is only useful to developers.

The input topology should have been previously loaded with hwloc_topology_load().

23.5.3.3 hwloc_topology_destroy()

Terminate and free a topology context.

Parameters

```
topology is the topology to be freed
```

23.5.3.4 hwloc_topology_dup()

```
int hwloc_topology_dup (
```

```
hwloc_topology_t * newtopology,
hwloc_topology_t oldtopology )
```

Duplicate a topology.

The entire topology structure as well as its objects are duplicated into a new one.

This is useful for keeping a backup while modifying a topology.

Note

Object userdata is not duplicated since hwloc does not know what it point to. The objects of both old and new topologies will point to the same userdata.

23.5.3.5 hwloc_topology_init()

Allocate a topology context.

Parameters

out	topologyp	is assigned a pointer to the new allocated context.	
-----	-----------	---	--

Returns

0 on success, -1 on error.

23.5.3.6 hwloc_topology_load()

```
int hwloc_topology_load ( {\tt hwloc\_topology\_t\ topology\ )}
```

Build the actual topology.

Build the actual topology once initialized with hwloc_topology_init() and tuned with Topology Detection Configuration and Query and Changing the Source of Topology Discovery routines. No other routine may be called earlier using this topology context.

Parameters

topology	is the topology to be loaded with objects.

Returns

0 on success, -1 on error.

Note

On failure, the topology is reinitialized. It should be either destroyed with hww.commons.org/hww.commons.org/hww.commons.org/ and loaded again.

This function may be called only once per topology.

The binding of the current thread or process may temporarily change during this call but it will be restored before it returns.

See also

Topology Detection Configuration and Query and Changing the Source of Topology Discovery

23.6 Object levels, depths and types

Enumerations

enum hwloc_get_type_depth_e {
 HWLOC_TYPE_DEPTH_UNKNOWN, HWLOC_TYPE_DEPTH_MULTIPLE, HWLOC_TYPE_DEPTH_NUMANODE
 , HWLOC_TYPE_DEPTH_BRIDGE,
 HWLOC_TYPE_DEPTH_PCI_DEVICE, HWLOC_TYPE_DEPTH_OS_DEVICE, HWLOC_TYPE_DEPTH_MISC
 , HWLOC_TYPE_DEPTH_MEMCACHE }

Functions

- int hwloc_topology_get_depth (hwloc_topology_t restrict topology)
- int hwloc get type depth (hwloc topology t topology, hwloc obj type t type)
- int hwloc_get_memory_parents_depth (hwloc_topology_t topology)
- static int hwloc_get_type_or_below_depth (hwloc_topology_t topology, hwloc_obj_type_t type)
- static int hwloc get type or above depth (hwloc topology t topology, hwloc obj type t type)
- hwloc_obj_type_t hwloc_get_depth_type (hwloc_topology_t topology, int depth)
- unsigned hwloc_get_nbobjs_by_depth (hwloc_topology_t topology, int depth)
- static int hwloc get_nbobjs by type (hwloc_topology_t topology, hwloc_obj_type_t type)
- static hwloc_obj_t hwloc_get_root_obj (hwloc_topology_t topology)
- hwloc_obj_t hwloc_get_obj_by_depth (hwloc_topology_t topology, int depth, unsigned idx)
- static hwloc_obj_t hwloc_get_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned idx)
- static hwloc_obj_t hwloc_get_next_obj_by_depth (hwloc_topology_t topology, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, hwloc_obj_t prev)

23.6.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.6.2 Enumeration Type Documentation

23.6.2.1 hwloc_get_type_depth_e

enum hwloc_get_type_depth_e

HWLOC_TYPE_DEPTH_UNKNOWN	No object of given type exists in the topology.
HWLOC_TYPE_DEPTH_MULTIPLE	Objects of given type exist at different depth in the topology (only for Groups).
HWLOC_TYPE_DEPTH_NUMANODE	Virtual depth for NUMA nodes.
HWLOC_TYPE_DEPTH_BRIDGE	Virtual depth for bridge object level.
HWLOC_TYPE_DEPTH_PCI_DEVICE	Virtual depth for PCI device object level.
HWLOC_TYPE_DEPTH_OS_DEVICE	Virtual depth for software device object level.
HWLOC_TYPE_DEPTH_MISC	Virtual depth for Misc object.
HWLOC_TYPE_DEPTH_MEMCACHE	Virtual depth for MemCache object.

23.6.3 Function Documentation

23.6.3.1 hwloc_get_depth_type()

Returns the type of objects at depth depth.

depth should between 0 and hwloc_topology_get_depth()-1, or a virtual depth such as HWLOC_TYPE_DEPTH_NUMANODE.

Returns

(hwloc_obj_type_t)-1 if depth depth does not exist.

23.6.3.2 hwloc_get_memory_parents_depth()

Return the depth of parents where memory objects are attached.

Memory objects have virtual negative depths because they are not part of the main CPU-side hierarchy of objects. This depth should not be compared with other level depths.

If all Memory objects are attached to Normal parents at the same depth, this parent depth may be compared to other as usual, for instance for knowing whether NUMA nodes is attached above or below Packages.

Returns

The depth of Normal parents of all memory children if all these parents have the same depth. For instance the depth of the Package level if all NUMA nodes are attached to Package objects.

HWLOC_TYPE_DEPTH_MULTIPLE if Normal parents of all memory children do not have the same depth. For instance if some NUMA nodes are attached to Packages while others are attached to Groups.

23.6.3.3 hwloc_get_nbobjs_by_depth()

Returns the width of level at depth depth.

23.6.3.4 hwloc_get_nbobjs_by_type()

Returns the width of level type type.

If no object for that type exists, 0 is returned. If there are several levels with objects of that type, -1 is returned.

23.6.3.5 hwloc_get_next_obj_by_depth()

Returns the next object at depth depth.

If ${\tt prev}$ is ${\tt NULL},$ return the first object at depth ${\tt depth}$

23.6.3.6 hwloc_get_next_obj_by_type()

Returns the next object of type type.

If prev is NULL, return the first object at type type. If there are multiple or no depth for given type, return NULL and let the caller fallback to hwloc get next obj by depth().

23.6.3.7 hwloc_get_obj_by_depth()

```
hwloc_obj_t hwloc_get_obj_by_depth (
          hwloc_topology_t topology,
          int depth,
          unsigned idx )
```

Returns the topology object at logical index idx from depth depth.

23.6.3.8 hwloc_get_obj_by_type()

Returns the topology object at logical index idx with type type.

If no object for that type exists, <code>NULL</code> is returned. If there are several levels with objects of that type (HWLOC_OBJ_GROUP), <code>NULL</code> is returned and the caller may fallback to hwloc_get_obj_by_depth().

23.6.3.9 hwloc_get_root_obj()

Returns the top-object of the topology-tree.

Its type is HWLOC_OBJ_MACHINE.

23.6.3.10 hwloc_get_type_depth()

Returns the depth of objects of type type.

If no object of this type is present on the underlying architecture, or if the OS doesn't provide this kind of information, the function returns HWLOC_TYPE_DEPTH_UNKNOWN.

If type is absent but a similar type is acceptable, see also hwloc_get_type_or_below_depth() and hwloc_get_type_or_above_depth(). If HWLOC_OBJ_GROUP is given, the function may return HWLOC_TYPE_DEPTH_MULTIPLE if multiple levels of Groups exist.

If a NUMA node, I/O or Misc object type is given, the function returns a virtual value because these objects are stored in special levels that are not CPU-related. This virtual depth may be passed to other hwloc functions such as hwloc_get_obj_by_depth() but it should not be considered as an actual depth by the application. In particular, it should not be compared with any other object depth or with the entire topology depth.

See also

```
hwloc get memory parents depth().
```

hwloc type sscanf as depth() for returning the depth of objects whose type is given as a string.

23.6.3.11 hwloc_get_type_or_above_depth()

Returns the depth of objects of type type or above.

If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically containing type.

This function is only meaningful for normal object types. If a memory, I/O or Misc object type is given, the corresponding virtual depth is always returned (see <a href="https://www.hullon.com/hullon/hullo

May return HWLOC_TYPE_DEPTH_MULTIPLE for HWLOC_OBJ_GROUP just like hwloc_get_type_depth().

23.6.3.12 hwloc_get_type_or_below_depth()

Returns the depth of objects of type type or below.

If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically found inside type.

This function is only meaningful for normal object types. If a memory, I/O or Misc object type is given, the corresponding virtual depth is always returned (see <a href="https://www.hullon.com/hullon/hullo

May return HWLOC TYPE DEPTH MULTIPLE for HWLOC OBJ GROUP just like hwloc get type depth().

23.6.3.13 hwloc topology get depth()

Get the depth of the hierarchical tree of objects.

This is the depth of HWLOC_OBJ_PU objects plus one.

Note

NUMA nodes, I/O and Misc objects are ignored when computing the depth of the tree (they are placed on special levels).

23.7 Converting between Object Types and Attributes, and Strings

Functions

- const char * hwloc_obj_type_string (hwloc_obj_type_t type)
- int hwloc_obj_type_snprintf (char *restrict string, size_t size, hwloc_obj_t obj, int verbose)
- int hwloc_obj_attr_snprintf (char *restrict string, size_t size, hwloc_obj_t obj, const char *restrict separator, int verbose)
- int hwloc_type_sscanf (const char *string, hwloc_obj_type_t *typep, union hwloc_obj_attr_u *attrp, size_t attrsize)
- int hwloc_type_sscanf_as_depth (const char *string, hwloc_obj_type_t *typep, hwloc_topology_t topology, int *depthp)

23.7.1 Detailed Description

23.7.2 Function Documentation

23.7.2.1 hwloc_obj_attr_snprintf()

```
hwloc_obj_t obj,
const char *restrict separator,
int verbose )
```

Stringify the attributes of a given topology object into a human-readable form.

Attribute values are separated by separator.

Only the major attributes are printed in non-verbose mode.

If size is 0, string may safely be NULL.

Returns

the number of character that were actually written if not truncating, or that would have been written (not including the ending \0).

23.7.2.2 hwloc obj type snprintf()

Stringify the type of a given topology object into a human-readable form.

Contrary to hwloc_obj_type_string(), this function includes object-specific attributes (such as the Group depth, the Bridge type, or OS device type) in the output, and it requires the caller to provide the output buffer.

The output is guaranteed to be the same for all objects of a same topology level.

If verbose is 1, longer type names are used, e.g. L1Cache instead of L1.

The output string may be parsed back by hwloc_type_sscanf().

If size is 0, string may safely be NULL.

Returns

the number of character that were actually written if not truncating, or that would have been written (not including the ending \0).

23.7.2.3 hwloc_obj_type_string()

Return a constant stringified object type.

This function is the basic way to convert a generic type into a string. The output string may be parsed back by hwloc_type_sscanf().

hwloc_obj_type_snprintf() may return a more precise output for a specific object, but it requires the caller to provide the output buffer.

23.7.2.4 hwloc_type_sscanf()

Return an object type and attributes from a type string.

Convert strings such as "Package" or "L1iCache" into the corresponding types. Matching is case-insensitive, and only the first letters are actually required to match.

The matched object type is set in typep (which cannot be NULL).

Type-specific attributes, for instance Cache type, Cache depth, Group depth, Bridge type or OS Device type may be returned in attrp. Attributes that are not specified in the string (for instance "Group" without a depth, or "L2Cache" without a cache type) are set to -1.

attrp is only filled if not NULL and if its size specified in attrsize is large enough. It should be at least as large as union hwloc_obj_attr_u.

Returns

0 if a type was correctly identified, otherwise -1.

Note

This function is guaranteed to match any string returned by hwloc_obj_type_string() or hwloc_obj_type_snprintf().

This is an extended version of the now deprecated hwloc obj type sscanf().

23.7.2.5 hwloc_type_sscanf_as_depth()

Return an object type and its level depth from a type string.

Convert strings such as "Package" or "L1iCache" into the corresponding types and return in depthp the depth of the corresponding level in the topology topology.

If no object of this type is present on the underlying architecture, HWLOC_TYPE_DEPTH_UNKNOWN is returned. If multiple such levels exist (for instance if giving Group without any depth), the function may return HWLOC_TYPE_DEPTH_MULTIPLE instead.

The matched object type is set in typep if typep is non NULL.

Note

This function is similar to hwloc_type_sscanf() followed by hwloc_get_type_depth() but it also automatically disambiguates multiple group levels etc.

This function is guaranteed to match any string returned by hwloc obj type string() or hwloc obj type snprintf().

23.8 Consulting and Adding Key-Value Info Attributes

Functions

- static const char * hwloc_obj_get_info_by_name (hwloc_obj_t obj, const char *name)
- int hwloc obj add info (hwloc obj t obj, const char *name, const char *value)

23.8.1 Detailed Description

23.8.2 Function Documentation

23.8.2.1 hwloc_obj_add_info()

Add the given info name and value pair to the given object.

The info is appended to the existing info array even if another key with the same name already exists.

The input strings are copied before being added in the object infos.

Returns

```
0 on success, -1 on error.
```

Note

This function may be used to enforce object colors in the Istopo graphical output by using "IstopoStyle" as a name and "Background=#rrggbb" as a value. See CUSTOM COLORS in the Istopo(1) manpage for details.

If value contains some non-printable characters, they will be dropped when exporting to XML, see hwloc/export.m.

23.8.2.2 hwloc_obj_get_info_by_name()

Search the given key name in object infos and return the corresponding value.

If multiple keys match the given name, only the first one is returned.

Returns

NULL if no such key exists.

23.9 CPU binding

Enumerations

 enum hwloc_cpubind_flags_t { HWLOC_CPUBIND_PROCESS , HWLOC_CPUBIND_THREAD , HWLOC CPUBIND STRICT, HWLOC CPUBIND NOMEMBIND }

Functions

- int hwloc_set_cpubind (hwloc_topology_t topology, hwloc_const_cpuset_t set, int flags)
- int hwloc_get_cpubind (hwloc_topology_t topology, hwloc_cpuset_t set, int flags)
- int hwloc_set_proc_cpubind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_const_cpuset_t set, int flags)
- int hwloc_get_proc_cpubind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_cpuset_t set, int flags)
- int hwloc_set_thread_cpubind (hwloc_topology_t topology, hwloc_thread_t thread, hwloc_const_cpuset_t set, int flags)
- int hwloc_get_thread_cpubind (hwloc_topology_t topology, hwloc_thread_t thread, hwloc_cpuset_t set, int flags)
- int hwloc_get_last_cpu_location (hwloc_topology_t topology, hwloc_cpuset_t set, int flags)
- int hwloc_get_proc_last_cpu_location (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_cpuset_t set, int flags)

23.9.1 Detailed Description

Some operating systems only support binding threads or processes to a single PU. Others allow binding to larger sets such as entire Cores or Packages or even random sets of invididual PUs. In such operating system, the scheduler is free to run the task on one of these PU, then migrate it to another PU, etc. It is often useful to call hwloc_bitmap_singlify() on the target CPU set before passing it to the binding function to avoid these expensive migrations. See the documentation of hwloc_bitmap_singlify() for details.

Some operating systems do not provide all hwloc-supported mechanisms to bind processes, threads, etc. hwloc_topology_get_support() may be used to query about the actual CPU binding support in the currently used operating system.

When the requested binding operation is not available and the HWLOC_CPUBIND_STRICT flag was passed, the function returns -1. errno is set to ENOSYS when it is not possible to bind the requested kind of object processes/threads. errno is set to EXDEV when the requested cpuset can not be enforced (e.g. some systems only allow one CPU, and some other systems only allow one NUMA node).

If HWLOC_CPUBIND_STRICT was not passed, the function may fail as well, or the operating system may use a slightly different operation (with side-effects, smaller binding set, etc.) when the requested operation is not exactly supported.

23.9 CPU binding 97

The most portable version that should be preferred over the others, whenever possible, is the following one which just binds the current program, assuming it is single-threaded:

hwloc_set_cpubind(topology, set, 0),

If the program may be multithreaded, the following one should be preferred to only bind the current thread: $hwloc_set_cpubind(topology, set, HWLOC_CPUBIND_THREAD)$,

See also

Some example codes are available under doc/examples/ in the source tree.

Note

To unbind, just call the binding function with either a full cpuset or a cpuset equal to the system cpuset.

On some operating systems, CPU binding may have effects on memory binding, see HWLOC_CPUBIND_NOMEMBIND Running Istopo --top or hwloc-ps can be a very convenient tool to check how binding actually happened.

23.9.2 Enumeration Type Documentation

23.9.2.1 hwloc_cpubind_flags_t

enum hwloc_cpubind_flags_t

Process/Thread binding flags.

These bit flags can be used to refine the binding policy.

The default (0) is to bind the current process, assumed to be single-threaded, in a non-strict way. This is the most portable way to bind as all operating systems usually provide it.

Note

Not all systems support all kinds of binding. See the "Detailed Description" section of CPU binding for a description of errors that can occur.

HWLOC_CPUBIND_PROCESS	Bind all threads of the current (possibly) multithreaded process.
HWLOC_CPUBIND_THREAD	Bind current thread of current process.
HWLOC_CPUBIND_STRICT	Request for strict binding from the OS. By default, when the designated CPUs are all busy while other CPUs are idle, operating systems may execute the thread/process on those other CPUs instead of the designated CPUs, to let them progress anyway. Strict binding means that the thread/process will _never_ execute on other cpus than the designated CPUs, even when those are busy with other tasks and other CPUs are idle.
	Note
	Depending on the operating system, strict binding may not be possible (e.g., the OS does not implement it) or not allowed (e.g., for an administrative reasons), and the function will fail in that case.
	When retrieving the binding of a process, this flag checks whether all its threads actually have the same binding. If the flag is not given, the binding of each thread will be accumulated.
	Note
	This flag is meaningless when retrieving the binding of a thread.

Enumerator

HWLOC_CPUBIND_NOMEMBIND	Avoid any effect on memory binding. On some operating systems, some CPU binding function would also bind the memory on the corresponding NUMA node. It is often not a problem for the application, but if it is, setting this flag will make hwloc avoid using OS functions that would also bind memory. This will however reduce the support of CPU bindings, i.e. potentially return -1 with errno set to ENOSYS in some cases. This flag is only meaningful when used with functions that set the CPU
	binding. It is ignored when used with functions that get CPU binding
	information.

23.9.3 Function Documentation

23.9.3.1 hwloc_get_cpubind()

```
int hwloc_get_cpubind (
          hwloc_topology_t topology,
          hwloc_cpuset_t set,
          int flags )
```

Get current process or thread binding.

Writes into set the physical cpuset which the process or thread (according to flags) was last bound to.

23.9.3.2 hwloc_get_last_cpu_location()

```
int hwloc_get_last_cpu_location (
                hwloc_topology_t topology,
                 hwloc_cpuset_t set,
                 int flags )
```

Get the last physical CPU where the current process or thread ran.

The operating system may move some tasks from one processor to another at any time according to their binding, so this function may return something that is already outdated.

flags can include either HWLOC_CPUBIND_PROCESS or HWLOC_CPUBIND_THREAD to specify whether the query should be for the whole process (union of all CPUs on which all threads are running), or only the current thread. If the process is single-threaded, flags can be set to zero to let hwloc use whichever method is available on the underlying OS.

23.9.3.3 hwloc_get_proc_cpubind()

Get the current physical binding of process pid.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_← CPUBIND_THREAD is passed in flags, the binding for that specific thread is returned.

On non-Linux systems, $HWLOC_CPUBIND_THREAD$ can not be used in flags.

23.9 CPU binding 99

23.9.3.4 hwloc_get_proc_last_cpu_location()

Get the last physical CPU where a process ran.

The operating system may move some tasks from one processor to another at any time according to their binding, so this function may return something that is already outdated.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_CPUBIND_THREAD is passed in flags, the last CPU location of that specific thread is returned.

On non-Linux systems, HWLOC_CPUBIND_THREAD can not be used in flags.

23.9.3.5 hwloc_get_thread_cpubind()

Get the current physical binding of thread tid.

Note

hwloc_thread_t is pthread_t on Unix platforms, and HANDLE on native Windows platforms. HWLOC_CPUBIND_PROCESS can not be used in flags.

23.9.3.6 hwloc_set_cpubind()

```
int hwloc_set_cpubind (
          hwloc_topology_t topology,
          hwloc_const_cpuset_t set,
          int flags )
```

Bind current process or thread on cpus given in physical bitmap set.

Returns

- -1 with errno set to ENOSYS if the action is not supported
- -1 with errno set to EXDEV if the binding cannot be enforced

23.9.3.7 hwloc_set_proc_cpubind()

Bind a process pid on cpus given in physical bitmap set.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_CPUBIND_THREAD is passed in flags, the binding is applied to that specific thread.

On non-Linux systems, HWLOC CPUBIND THREAD can not be used in flags.

23.9.3.8 hwloc set thread cpubind()

Bind a thread thread on cpus given in physical bitmap set.

Note

hwloc_thread_t is pthread_t on Unix platforms, and HANDLE on native Windows platforms. HWLOC CPUBIND PROCESS can not be used in flags.

23.10 Memory binding

Enumerations

```
    enum hwloc_membind_policy_t {
        HWLOC_MEMBIND_DEFAULT , HWLOC_MEMBIND_FIRSTTOUCH , HWLOC_MEMBIND_BIND ,
        HWLOC_MEMBIND_INTERLEAVE ,
        HWLOC_MEMBIND_NEXTTOUCH , HWLOC_MEMBIND_MIXED }
    enum hwloc_membind_flags_t {
        HWLOC_MEMBIND_PROCESS , HWLOC_MEMBIND_THREAD , HWLOC_MEMBIND_MIGRATE ,
        HWLOC_MEMBIND_NOCPUBIND , HWLOC_MEMBIND_BYNODESET }
```

Functions

- int hwloc_set_membind (hwloc_topology_t topology, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_get_membind (hwloc_topology_t topology, hwloc_bitmap_t set, hwloc_membind_policy_t *policy, int flags)
- int hwloc_set_proc_membind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_get_proc_membind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_bitmap_t set, hwloc_membind_policy_t *policy, int flags)
- int hwloc_set_area_membind (hwloc_topology_t topology, const void *addr, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_get_area_membind (hwloc_topology_t topology, const void *addr, size_t len, hwloc_bitmap_t set, hwloc membind policy t *policy, int flags)
- int hwloc_get_area_memlocation (hwloc_topology_t topology, const void *addr, size_t len, hwloc_bitmap_t set, int flags)
- void * hwloc_alloc (hwloc_topology_t topology, size_t len)
- void * hwloc_alloc_membind (hwloc_topology_t topology, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- static void * hwloc_alloc_membind_policy (hwloc_topology_t topology, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_free (hwloc_topology_t topology, void *addr, size_t len)

23.10 Memory binding 101

23.10.1 Detailed Description

Memory binding can be done three ways:

- implicit memory binding through binding policy: hwloc_set_membind() and friends only define the current policy of the process, which will be applied to the subsequent calls to malloc() and friends.
- migration of existing memory ranges, thanks to hwloc_set_area_membind() and friends, which move alreadyallocated data.

Not all operating systems support all three ways. hwloc_topology_get_support() may be used to query about the actual memory binding support in the currently used operating system.

When the requested binding operation is not available and the HWLOC_MEMBIND_STRICT flag was passed, the function returns -1. errno will be set to ENOSYS when the system does support the specified action or policy (e.g., some systems only allow binding memory on a per-thread basis, whereas other systems only allow binding memory for all threads in a process). errno will be set to EXDEV when the requested set can not be enforced (e.g., some systems only allow binding memory to a single NUMA node).

If HWLOC_MEMBIND_STRICT was not passed, the function may fail as well, or the operating system may use a slightly different operation (with side-effects, smaller binding set, etc.) when the requested operation is not exactly supported.

The most portable form that should be preferred over the others whenever possible is as follows. It allocates some memory hopefully bound to the specified set. To do so, hwloc will possibly have to change the current memory binding policy in order to actually get the memory bound, if the OS does not provide any other way to simply allocate bound memory without changing the policy for all allocations. That is the difference with hwloc_alloc_membind(), which will never change the current memory binding policy.

```
hwloc_alloc_membind_policy(topology, size, set, HWLOC_MEMBIND_BIND, 0);
```

Each hwloc memory binding function takes a bitmap argument that is a CPU set by default, or a NUMA memory node set if the flag HWLOC_MEMBIND_BYNODESET is specified. See Object Sets (hwloc_cpuset_t and hwloc_nodeset_t) and The bitmap API for a discussion of CPU sets and NUMA memory node sets. It is also possible to convert between CPU set and node set using hwloc_cpuset_to_nodeset() or hwloc_cpuset_from_nodeset().

Memory binding by CPU set cannot work for CPU-less NUMA memory nodes. Binding by nodeset should therefore be preferred whenever possible.

See also

Some example codes are available under doc/examples/ in the source tree.

Note

On some operating systems, memory binding affects the CPU binding; see HWLOC MEMBIND NOCPUBIND

23.10.2 Enumeration Type Documentation

23.10.2.1 hwloc membind flags t

```
enum hwloc_membind_flags_t
```

Memory binding flags.

These flags can be used to refine the binding policy. All flags can be logically OR'ed together with the exception of HWLOC_MEMBIND_PROCESS and HWLOC_MEMBIND_THREAD; these two flags are mutually exclusive. Not all systems support all kinds of binding. hwloc_topology_get_support() may be used to query about the actual memory binding support in the currently used operating system. See the "Detailed Description" section of Memory binding for a description of errors that can occur.

Enumerator

HWLOC_MEMBIND_PROCESS	Set policy for all threads of the specified (possibly multithreaded) process. This flag is mutually exclusive with HWLOC_MEMBIND_THREAD.
HWLOC_MEMBIND_THREAD	Set policy for a specific thread of the current process. This flag is mutually exclusive with HWLOC_MEMBIND_PROCESS.
HWLOC_MEMBIND_STRICT	Request strict binding from the OS. The function will fail if the binding can not be guaranteed / completely enforced. This flag has slightly different meanings depending on which function it is used with.
HWLOC_MEMBIND_MIGRATE	Migrate existing allocated memory. If the memory cannot be migrated and the HWLOC_MEMBIND_STRICT flag is passed, an error will be returned.
HWLOC_MEMBIND_NOCPUBIND	Avoid any effect on CPU binding. On some operating systems, some underlying memory binding functions also bind the application to the corresponding CPU(s). Using this flag will cause hwloc to avoid using OS functions that could potentially affect CPU bindings. Note, however, that using NOCPUBIND may reduce hwloc's overall memory binding support. Specifically: some of hwloc's memory binding functions may fail with errno set to ENOSYS when used with NOCPUBIND.
HWLOC_MEMBIND_BYNODESET	Consider the bitmap argument as a nodeset. The bitmap argument is considered a nodeset if this flag is given, or a cpuset otherwise by default. Memory binding by CPU set cannot work for CPU-less NUMA memory nodes. Binding by nodeset should therefore be preferred whenever possible.

23.10.2.2 hwloc_membind_policy_t

enum hwloc_membind_policy_t

Memory binding policy.

These constants can be used to choose the binding policy. Only one policy can be used at a time (i.e., the values cannot be OR'ed together).

Not all systems support all kinds of binding. hwloc_topology_get_support() may be used to query about the actual memory binding policy support in the currently used operating system. See the "Detailed Description" section of Memory binding for a description of errors that can occur.

HWLOC_MEMBIND_DEFAULT	Reset the memory allocation policy to the system default. Depending on the operating system, this may correspond to HWLOC_MEMBIND_FIRSTTOUCH (Linux, FreeBSD), or HWLOC_MEMBIND_BIND (AIX, HP-UX, Solaris, Windows). This policy is never returned by get membind functions. The nodeset argument is ignored.
HWLOC_MEMBIND_FIRSTTOUCH	Allocate each memory page individually on the local NUMA node of the thread that touches it. The given nodeset should usually be

23.10 Memory binding 103

Enumerator

HWLOC_MEMBIND_INTERLEAVE	Allocate memory on the given nodes in an interleaved / round-robin manner. The precise layout of the memory across multiple NUMA nodes is OS/system specific. Interleaving can be useful when threads distributed across the specified NUMA nodes will all be accessing the whole memory range concurrently, since the interleave will then balance the memory references.
HWLOC_MEMBIND_NEXTTOUCH	For each page bound with this policy, by next time it is touched (and next time only), it is moved from its current location to the local NUMA node of the thread where the memory reference occurred (if it needs to be moved at all).
HWLOC_MEMBIND_MIXED	Returned by get_membind() functions when multiple threads or parts of a memory area have differing memory binding policies. Also returned when binding is unknown because binding hooks are empty when the topology is loaded from XML without HWLOC_THISSYSTEM=1, etc.

23.10.3 Function Documentation

23.10.3.1 hwloc_alloc()

Allocate some memory.

This is equivalent to malloc(), except that it tries to allocate page-aligned memory from the OS.

Note

The allocated memory should be freed with hwloc_free().

23.10.3.2 hwloc_alloc_membind()

Allocate some memory on NUMA memory nodes specified by set.

Returns

NULL with errno set to ENOSYS if the action is not supported and HWLOC_MEMBIND_STRICT is given NULL with errno set to EXDEV if the binding cannot be enforced and HWLOC_MEMBIND_STRICT is given NULL with errno set to ENOMEM if the memory allocation failed even before trying to bind.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Note

The allocated memory should be freed with hwloc_free().

23.10.3.3 hwloc_alloc_membind_policy()

```
static void* hwloc_alloc_membind_policy (
    hwloc_topology_t topology,
    size_t len,
    hwloc_const_bitmap_t set,
    hwloc_membind_policy_t policy,
    int flags ) [inline], [static]
```

Allocate some memory on NUMA memory nodes specified by set.

This is similar to hwloc_alloc_membind_nodeset() except that it is allowed to change the current memory binding policy, thus providing more binding support, at the expense of changing the current state.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

23.10.3.4 hwloc_free()

Free memory that was previously allocated by hwloc_alloc() or hwloc_alloc_membind().

23.10.3.5 hwloc_get_area_membind()

```
int hwloc_get_area_membind (
          hwloc_topology_t topology,
          const void * addr,
          size_t len,
          hwloc_bitmap_t set,
          hwloc_membind_policy_t * policy,
          int flags )
```

Query the CPUs near the physical NUMA node(s) and binding policy of the memory identified by (addr, len).

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the memory binding policies and nodesets of the pages in the address range.

If HWLOC_MEMBIND_STRICT is specified, the target pages are first checked to see if they all have the same memory binding policy and nodeset. If they do not, -1 is returned and errno is set to EXDEV. If they are identical across all pages, the set and policy are returned in set and policy, respectively.

If HWLOC_MEMBIND_STRICT is not specified, the union of all NUMA node(s) containing pages in the address range is calculated. If all pages in the target have the same policy, it is returned in policy. Otherwise, policy is set to HWLOC MEMBIND MIXED.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

If any other flags are specified, -1 is returned and errno is set to EINVAL.

If len is 0, -1 is returned and errno is set to EINVAL.

23.10.3.6 hwloc_get_area_memlocation()

Get the NUMA nodes where memory identified by (addr, len) is physically allocated.

Fills set according to the NUMA nodes where the memory area pages are physically allocated. If no page is actually allocated yet, set may be empty.

If pages spread to multiple nodes, it is not specified whether they spread equitably, or whether most of them are on a single node, etc.

The operating system may move memory pages from one processor to another at any time according to their binding, so this function may return something that is already outdated.

23.10 Memory binding 105

If HWLOC_MEMBIND_BYNODESET is specified in flags, set is considered a nodeset. Otherwise it's a cpuset. If len is 0, set is emptied.

23.10.3.7 hwloc_get_membind()

```
int hwloc_get_membind (
          hwloc_topology_t topology,
          hwloc_bitmap_t set,
          hwloc_membind_policy_t * policy,
          int flags )
```

Query the default memory binding policy and physical locality of the current process or thread.

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the current memory binding policies and nodesets in the queried target.

Passing the HWLOC_MEMBIND_PROCESS flag specifies that the query target is the current policies and nodesets for all the threads in the current process. Passing HWLOC_MEMBIND_THREAD specifies that the query target is the current policy and nodeset for only the thread invoking this function.

If neither of these flags are passed (which is the most portable method), the process is assumed to be single threaded. This allows hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

HWLOC_MEMBIND_STRICT is only meaningful when HWLOC_MEMBIND_PROCESS is also specified. In this case, hwloc will check the default memory policies and nodesets for all threads in the process. If they are not identical, -1 is returned and errno is set to EXDEV. If they are identical, the values are returned in set and policy. Otherwise, if HWLOC_MEMBIND_PROCESS is specified (and HWLOC_MEMBIND_STRICT is not specified), the default set from each thread is logically OR'ed together. If all threads' default policies are the same, policy is set to that policy. If they are different, policy is set to HWLOC_MEMBIND_MIXED.

In the HWLOC_MEMBIND_THREAD case (or when neither HWLOC_MEMBIND_PROCESS or HWLOC_MEMBIND_THREAD is specified), there is only one set and policy; they are returned in set and policy, respectively.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

If any other flags are specified, -1 is returned and errno is set to EINVAL.

23.10.3.8 hwloc_get_proc_membind()

Query the default memory binding policy and physical locality of the specified process.

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the current memory binding policies and nodesets in the queried target.

Passing the HWLOC_MEMBIND_PROCESS flag specifies that the query target is the current policies and nodesets for all the threads in the specified process. If HWLOC_MEMBIND_PROCESS is not specified (which is the most portable method), the process is assumed to be single threaded. This allows hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

Note that it does not make sense to pass HWLOC_MEMBIND_THREAD to this function.

If HWLOC_MEMBIND_STRICT is specified, hwloc will check the default memory policies and nodesets for all threads in the specified process. If they are not identical, -1 is returned and errno is set to EXDEV. If they are identical, the values are returned in set and policy.

Otherwise, set is set to the logical OR of all threads' default set. If all threads' default policies are the same, policy is set to that policy. If they are different, policy is set to HWLOC_MEMBIND_MIXED.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

If any other flags are specified, -1 is returned and errno is set to EINVAL.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

23.10.3.9 hwloc_set_area_membind()

```
int hwloc_set_area_membind (
    hwloc_topology_t topology,
    const void * addr,
    size_t len,
    hwloc_const_bitmap_t set,
    hwloc_membind_policy_t policy,
    int flags )
```

Bind the already-allocated memory identified by (addr, len) to the NUMA node(s) specified by set. If HWLOC MEMBIND BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

0 if len is 0.

- -1 with errno set to ENOSYS if the action is not supported
- -1 with errno set to EXDEV if the binding cannot be enforced

23.10.3.10 hwloc_set_membind()

Set the default memory binding policy of the current process or thread to prefer the NUMA node(s) specified by set.

If neither HWLOC_MEMBIND_PROCESS nor HWLOC_MEMBIND_THREAD is specified, the current process is assumed to be single-threaded. This is the most portable form as it permits hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

- -1 with errno set to ENOSYS if the action is not supported
- -1 with errno set to EXDEV if the binding cannot be enforced

23.10.3.11 hwloc_set_proc_membind()

```
int hwloc_set_proc_membind (
          hwloc_topology_t topology,
          hwloc_pid_t pid,
          hwloc_const_bitmap_t set,
          hwloc_membind_policy_t policy,
          int flags )
```

Set the default memory binding policy of the specified process to prefer the NUMA node(s) specified by set. If HWLOC MEMBIND BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

- -1 with errno set to ENOSYS if the action is not supported
- -1 with errno set to EXDEV if the binding cannot be enforced

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

23.11 Changing the Source of Topology Discovery

Enumerations

enum hwloc_topology_components_flag_e { HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST }

Functions

- int hwloc_topology_set_pid (hwloc_topology_t restrict topology, hwloc_pid_t pid)
- int hwloc topology set synthetic (hwloc topology t restrict topology, const char *restrict description)
- int hwloc_topology_set_xml (hwloc_topology_t restrict topology, const char *restrict xmlpath)
- int hwloc_topology_set_xmlbuffer (hwloc_topology_t restrict topology, const char *restrict buffer, int size)
- int hwloc_topology_set_components (hwloc_topology_t restrict topology, unsigned long flags, const char *restrict name)

23.11.1 Detailed Description

If none of the functions below is called, the default is to detect all the objects of the machine that the caller is allowed to access.

This default behavior may also be modified through environment variables if the application did not modify it already. Setting HWLOC_XMLFILE in the environment enforces the discovery from a XML file as if hwloc_topology_set_xml() had been called. Setting HWLOC_SYNTHETIC enforces a synthetic topology as if hwloc topology set synthetic() had been called.

Finally, HWLOC_THISSYSTEM enforces the return value of hwloc_topology_is_thissystem().

23.11.2 Enumeration Type Documentation

23.11.2.1 hwloc_topology_components_flag_e

```
enum hwloc_topology_components_flag_e
Flags to be passed to hwloc_topology_set_components()
```

Enumerator

HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST	Blacklist the target component from being used.

23.11.3 Function Documentation

23.11.3.1 hwloc topology set components()

```
int hwloc_topology_set_components (
          hwloc_topology_t restrict topology,
          unsigned long flags,
          const char *restrict name )
```

Prevent a discovery component from being used for a topology.

name is the name of the discovery component that should not be used when loading topology topology. The name is a string such as "cuda".

For components with multiple phases, it may also be suffixed with the name of a phase, for instance "linux:io". flags should be HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST.

This may be used to avoid expensive parts of the discovery process. For instance, CUDA-specific discovery may be expensive and unneeded while generic I/O discovery could still be useful.

23.11.3.2 hwloc_topology_set_pid()

Change which process the topology is viewed from.

On some systems, processes may have different views of the machine, for instance the set of allowed CPUs. By default, hwloc exposes the view from the current process. Calling hwloc_topology_set_pid() permits to make it expose the topology of the machine from the point of view of another process.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

-1 is returned and errno is set to ENOSYS on platforms that do not support this feature.

23.11.3.3 hwloc topology set synthetic()

Enable synthetic topology.

Gather topology information from the given description, a space-separated string of <type:number> describing the object type and arity at each level. All types may be omitted (space-separated string of numbers) so that hwloc chooses all types according to usual topologies. See also the Synthetic topologies.

Setting the environment variable HWLOC SYNTHETIC may also result in this behavior.

If description was properly parsed and describes a valid topology configuration, this function returns 0. Otherwise -1 is returned and errno is set to EINVAL.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc_topology_load() to actually load the topology information.

Note

For convenience, this backend provides empty binding hooks which just return success.

On success, the synthetic component replaces the previously enabled component (if any), but the topology is not actually modified until https://doi.org/10.2007/no.001

23.11.3.4 hwloc_topology_set_xml()

Enable XML-file based topology.

Gather topology information from the XML file given at xmlpath. Setting the environment variable HWLOC_XMLFILE may also result in this behavior. This file may have been generated earlier with hwloc_topology_export_xml() in hwloc/export.h, or Istopo file.xml.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc_topology_load() to actually load the topology information.

Returns

-1 with errno set to EINVAL on failure to read the XML file.

Note

See also hwloc_topology_set_userdata_import_callback() for importing application-specific object userdata.

For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM has to be set to assert that the loaded file is really the underlying system.

On success, the XML component replaces the previously enabled component (if any), but the topology is not actually modified until hwloc topology load().

23.11.3.5 hwloc_topology_set_xmlbuffer()

```
int hwloc_topology_set_xmlbuffer (
          hwloc_topology_t restrict topology,
          const char *restrict buffer,
          int size )
```

Enable XML based topology using a memory buffer (instead of a file, as with hwloc_topology_set_xml()).

Gather topology information from the XML memory buffer given at buffer and of length size. This buffer may have been filled earlier with hwloc_topology_export_xmlbuffer() in hwloc/export.h.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc_topology_load() to actually load the topology information.

Returns

-1 with errno set to EINVAL on failure to read the XML buffer.

Note

See also hwloc topology set userdata import callback() for importing application-specific object userdata.

For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM has to be set to assert that the loaded file is really the underlying system.

On success, the XML component replaces the previously enabled component (if any), but the topology is not actually modified until hwloc topology load().

23.12 Topology Detection Configuration and Query

Data Structures

- · struct hwloc_topology_discovery_support
- struct hwloc_topology_cpubind_support
- struct hwloc_topology_membind_support
- struct hwloc_topology_misc_support
- struct hwloc_topology_support

Enumerations

```
    enum hwloc_topology_flags_e {
        HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED, HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM,
        HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES, HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT
        = (1UL<<3),
        HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING = (1UL<<4), HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_M
        = (1UL<<5), HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_BINDING = (1UL<<6)}</li>
```

 enum hwloc_type_filter_e { HWLOC_TYPE_FILTER_KEEP_ALL , HWLOC_TYPE_FILTER_KEEP_NONE , HWLOC_TYPE_FILTER_KEEP_STRUCTURE , HWLOC_TYPE_FILTER_KEEP_IMPORTANT }

Functions

- int hwloc_topology_set_flags (hwloc_topology_t topology, unsigned long flags)
- unsigned long hwloc topology get flags (hwloc topology t topology)
- int hwloc_topology_is_thissystem (hwloc_topology_t restrict topology)
- const struct hwloc_topology_support * hwloc_topology_get_support (hwloc_topology_t restrict topology)
- int hwloc_topology_set_type_filter (hwloc_topology_t topology, hwloc_obj_type_t type, enum hwloc_type_filter_e filter)
- int hwloc_topology_get_type_filter (hwloc_topology_t topology, hwloc_obj_type_t type, enum hwloc_type_filter_e *filter)
- int hwloc_topology_set_all_types_filter (hwloc_topology_t topology, enum hwloc_type_filter_e filter)
- int hwloc_topology_set_cache_types_filter (hwloc_topology_t topology, enum hwloc_type_filter_e filter)
- int hwloc_topology_set_icache_types_filter (hwloc_topology_t topology, enum hwloc_type_filter_e filter)
- int hwloc_topology_set_io_types_filter (hwloc_topology_t topology, enum hwloc_type_filter_e filter)
- void hwloc_topology_set_userdata (hwloc_topology_t topology, const void *userdata)
- void * hwloc_topology_get_userdata (hwloc_topology_t topology)

23.12.1 Detailed Description

Several functions can optionally be called between hwloc_topology_load()) to configure how the detection should be performed, e.g. to ignore some objects types, define a synthetic topology, etc.

23.12.2 Enumeration Type Documentation

23.12.2.1 hwloc_topology_flags_e

enum hwloc_topology_flags_e

Flags to be set onto a topology context before load.

1 114 11 00 TODOL 001/ FLAG INIOLLIDE

Flags should be given to hwloc_topology_set_flags(). They may also be returned by hwloc_topology_get_flags().

HWLOC_TOPOLOGY_FLAG_INCLUDE_← DISALLOWED	Detect the whole system, ignore reservations, include disallowed objects. Gather all resources, even if some
DIOALLOWED	were disabled by the administrator. For instance,
	ignore Linux Cgroup/Cpusets and gather all
	processors and memory nodes.
	When this flag is not set, PUs and NUMA nodes that
	are disallowed are not added to the topology. Parent
	objects (package, core, cache, etc.) are added only if
	some of their children are allowed. All existing PUs
	and NUMA nodes in the topology are allowed.
	hwloc_topology_get_allowed_cpuset() and
	hwloc_topology_get_allowed_nodeset() are equal to
	the root object cpuset and nodeset.
	When this flag is set, the actual sets of allowed PUs
	and NUMA nodes are given by
	hwloc_topology_get_allowed_cpuset() and
	hwloc_topology_get_allowed_nodeset(). They may be
	smaller than the root object cpuset and nodeset.
	If the current topology is exported to XML and
	reimported later, this flag should be set again in the
	reimported topology so that disallowed resources are
	reimported as well.

Enumerator

HWLOC TOPOLOGY FLAG IS THISSYSTEM

Assume that the selected backend provides the topology for the system on which we are running. This forces hwloc_topology_is_thissystem() to return 1, i.e. makes hwloc assume that the selected backend provides the topology for the system on which we are running, even if it is not the OS-specific backend but the XML backend for instance. This means making the binding functions actually call the OS-specific system calls and really do binding, while the XML backend would otherwise provide empty hooks just returning success.

Setting the environment variable

HWLOC_THISSYSTEM may also result in the same behavior.

This can be used for efficiency reasons to first detect the topology once, save it to an XML file, and quickly reload it later through the XML backend, but still having binding functions actually do bind.

$\begin{array}{c} \mathsf{HWLOC_TOPOLOGY_FLAG_THISSYSTEM_} \hookleftarrow \\ \mathsf{ALLOWED} \ \ \mathsf{RESOURCES} \end{array}$

Get the set of allowed resources from the local operating system even if the topology was loaded from XML or synthetic description. If the topology was loaded from XML or from a synthetic string, restrict it by applying the current process restrictions such as Linux Cgroup/Cpuset.

This is useful when the topology is not loaded directly from the local machine (e.g. for performance reason) and it comes with all resources, while the running process is restricted to only parts of the machine. This flag is ignored unless

HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM is also set since the loaded topology must match the underlying machine where restrictions will be gathered from.

Setting the environment variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES would result in the same behavior.

Enumerator

HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT

Import support from the imported topology. When importing a XML topology from a remote machine, binding is disabled by default (see

HWLOC TOPOLOGY FLAG IS THISSYSTEM).

This disabling is also marked by putting zeroes in the corresponding supported feature bits reported by hwloc_topology_get_support().

The flag

HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT actually imports support bits from the remote machine. It also sets the flag imported_support in the struct hwloc_topology_misc_support array. If the imported XML did not contain any support information (exporter hwloc is too old), this flag is not set

Note that these supported features are only relevant for the hwloc installation that actually exported the XML topology (it may vary with the operating system, or with how hwloc was compiled).

Note that setting this flag however does not enable binding for the locally imported hwloc topology, it only reports what the remote hwloc and machine support.

HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_← CPUBINDING Do not consider resources outside of the process CPU binding. If the binding of the process is limited to a subset of cores, ignore the other cores during discovery.

The resulting topology is identical to what a call to hwloc_topology_restrict() would generate, but this flag also prevents hwloc from ever touching other resources during the discovery.

This flag especially tells the x86 backend to never temporarily rebind a thread on any excluded core. This is useful on Windows because such temporary rebinding can change the process binding. Another use-case is to avoid cores that would not be able to perform the hwloc discovery anytime soon because they are busy executing some high-priority real-time tasks.

If process CPU binding is not supported, the thread CPU binding is considered instead if supported, or the flag is ignored.

This flag requires

HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM as well since binding support is required.

Enumerator

	T
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_← MEMBINDING	Do not consider resources outside of the process memory binding. If the binding of the process is limited to a subset of NUMA nodes, ignore the other NUMA nodes during discovery. The resulting topology is identical to what a call to hwloc_topology_restrict() would generate, but this flag also prevents hwloc from ever touching other resources during the discovery. This flag is meant to be used together with HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING when both cores and NUMA nodes should be ignored outside of the process binding. If process memory binding is not supported, the thread memory binding is considered instead if supported, or the flag is ignored. This flag requires HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM as well since binding support is required.
HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_← BINDING	Do not ever modify the process or thread binding during discovery. This flag disables all hwloc discovery steps that require a change of the process or thread binding. This currently only affects the x86 backend which gets entirely disabled. This is useful when hwloc_topology_load() is called while the application also creates additional threads or modifies the binding. This flag is also a strict way to make sure the process binding will not change to due thread binding changes on Windows (see HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING)

23.12.2.2 hwloc_type_filter_e

enum hwloc_type_filter_e

Type filtering flags.

By default, most objects are kept (HWLOC_TYPE_FILTER_KEEP_ALL). Instruction caches, I/O and Misc objects are ignored by default (HWLOC_TYPE_FILTER_KEEP_NONE). Die and Group levels are ignored unless they bring structure (HWLOC_TYPE_FILTER_KEEP_STRUCTURE).

Note that group objects are also ignored individually (without the entire level) when they do not bring structure.

HWLOC_TYPE_FILTER_KEEP_ALL	Keep all objects of this type. Cannot be set for HWLOC_OBJ_GROUP (groups are designed only to add more structure to the topology).
HWLOC_TYPE_FILTER_KEEP_NONE	Ignore all objects of this type. The bottom-level type HWLOC_OBJ_PU, the HWLOC_OBJ_NUMANODE type, and the top-level type HWLOC_OBJ_MACHINE may not be ignored.

Enumerator

HWLOC_TYPE_FILTER_KEEP_STRUCTURE	Only ignore objects if their entire level does not bring any structure. Keep the entire level of objects if at least one of these objects adds structure to the topology. An object brings structure when it has multiple children and it is not the only child of its parent. If all objects in the level are the only child of their parent, and if none of them has multiple children, the entire level is removed.
	Cannot be set for I/O and Misc objects since the topology structure does not matter there.
HWLOC_TYPE_FILTER_KEEP_IMPORTANT	Only keep likely-important objects of the given type. It is only useful for I/O object types. For HWLOC_OBJ_PCI_DEVICE and HWLOC_OBJ_OS_DEVICE, it means that only objects of major/common kinds are kept (storage, network, OpenFabrics, CUDA, OpenCL, RSMI, NVML, and displays). Also, only OS devices directly attached on PCI (e.g. no USB) are reported. For HWLOC_OBJ_BRIDGE, it means that bridges are kept only if they have children. This flag equivalent to HWLOC_TYPE_FILTER_KEEP_ALL for Normal, Memory and Misc types since they are likely important.

23.12.3 Function Documentation

23.12.3.1 hwloc_topology_get_flags()

Returns

the flags previously set with hwloc_topology_set_flags().

23.12.3.2 hwloc_topology_get_support()

Retrieve the topology support.

Each flag indicates whether a feature is supported. If set to 0, the feature is not supported. If set to 1, the feature is supported, but the corresponding call may still fail in some corner cases.

These features are also listed by hwloc-info --support

The reported features are what the current topology supports on the current machine. If the topology was exported to XML from another machine and later imported here, support still describes what is supported for this imported topology after import. By default, binding will be reported as unsupported in this case (see HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM).

Topology flag HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT may be used to report the supported features of the original remote machine instead. If it was successfully imported, <code>imported_support</code> will be set in the struct hwloc_topology_misc_support array.

23.12.3.3 hwloc_topology_get_type_filter()

```
int hwloc_topology_get_type_filter (
          hwloc_topology_t topology,
          hwloc_obj_type_t type,
          enum hwloc_type_filter_e * filter )
```

Get the current filtering for the given object type.

23.12.3.4 hwloc_topology_get_userdata()

Retrieve the topology-specific userdata pointer.

Retrieve the application-given private data pointer that was previously set with hwloc_topology_set_userdata().

23.12.3.5 hwloc_topology_is_thissystem()

Does the topology context come from this system?

Returns

1 if this topology context was built using the system running this program.

0 instead (for instance if using another file-system root, a XML topology file, or a synthetic topology).

23.12.3.6 hwloc_topology_set_all_types_filter()

Set the filtering for all object types.

If some types do not support this filtering, they are silently ignored.

23.12.3.7 hwloc_topology_set_cache_types_filter()

Set the filtering for all CPU cache object types.

Memory-side caches are not involved since they are not CPU caches.

23.12.3.8 hwloc_topology_set_flags()

Set OR'ed flags to non-yet-loaded topology.

Set a OR'ed set of hwloc topology flags e onto a topology that was not yet loaded.

If this function is called multiple times, the last invokation will erase and replace the set of flags that was previously set.

The flags set in a topology may be retrieved with hwloc topology get flags()

23.12.3.9 hwloc_topology_set_icache_types_filter()

Set the filtering for all CPU instruction cache object types.

Memory-side caches are not involved since they are not CPU caches.

23.12.3.10 hwloc topology set io types filter()

Set the filtering for all I/O object types.

23.12.3.11 hwloc_topology_set_type_filter()

Set the filtering for the given object type.

23.12.3.12 hwloc_topology_set_userdata()

Set the topology-specific userdata pointer.

Each topology may store one application-given private data pointer. It is initialized to \mathtt{NULL} . hwloc will never modify it

Use it as you wish, after hwloc_topolog_destroy().

This pointer is not exported to XML.

23.13 Modifying a loaded Topology

Enumerations

- enum hwloc_restrict_flags_e {
 HWLOC_RESTRICT_FLAG_REMOVE_CPULESS, HWLOC_RESTRICT_FLAG_BYNODESET = (1UL<<3)
 , HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS, HWLOC_RESTRICT_FLAG_ADAPT_MISC,
 HWLOC_RESTRICT_FLAG_ADAPT_IO }
- enum hwloc_allow_flags_e { HWLOC_ALLOW_FLAG_ALL , HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS , HWLOC_ALLOW_FLAG_CUSTOM }

Functions

- int hwloc_topology_restrict (hwloc_topology_t restrict topology, hwloc_const_bitmap_t set, unsigned long flags)
- int hwloc_topology_allow (hwloc_topology_t restrict topology, hwloc_const_cpuset_t cpuset, hwloc_const_nodeset_t nodeset, unsigned long flags)
- hwloc_obj_t hwloc_topology_insert_misc_object (hwloc_topology_t topology, hwloc_obj_t parent, const char *name)
- hwloc_obj_t hwloc_topology_alloc_group_object (hwloc_topology_t topology)
- hwloc_obj_t hwloc_topology_insert_group_object (hwloc_topology_t topology, hwloc_obj_t group)
- int hwloc obj add other obj sets (hwloc obj t dst, hwloc obj t src)
- int hwloc_topology_refresh (hwloc_topology_t topology)

23.13.1 Detailed Description

23.13.2 Enumeration Type Documentation

23.13.2.1 hwloc_allow_flags_e

enum hwloc_allow_flags_e

Flags to be given to hwloc_topology_allow().

Enumerator

HWLOC_ALLOW_FLAG_ALL	Mark all objects as allowed in the topology. cpuset and nodeset given to hwloc_topology_allow() must be NULL.
HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS	Only allow objects that are available to the current process. The topology must have HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM so that the set of available resources can actually be retrieved from the operating system. cpuset and nodeset given to hwloc_topology_allow() must be NULL.
HWLOC_ALLOW_FLAG_CUSTOM	Allow a custom set of objects, given to hwloc_topology_allow() as cpuset and/or nodeset parameters.

23.13.2.2 hwloc_restrict_flags_e

enum hwloc_restrict_flags_e

Flags to be given to hwloc_topology_restrict().

HWLOC_RESTRICT_FLAG_REMOVE_CPULESS	Remove all objects that became CPU-less. By default, only objects that contain no PU and no memory are removed. This flag may not be used with HWLOC_RESTRICT_FLAG_BYNODESET.
HWLOC_RESTRICT_FLAG_BYNODESET	Restrict by nodeset instead of CPU set. Only keep objects whose nodeset is included or partially included in the given set. This flag may not be used with HWLOC_RESTRICT_FLAG_REMOVE_CPULESS.
HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS	Remove all objects that became Memory-less. By default, only objects that contain no PU and no memory are removed. This flag may only be used with HWLOC_RESTRICT_FLAG_BYNODESET.
HWLOC_RESTRICT_FLAG_ADAPT_MISC	Move Misc objects to ancestors if their parents are removed during restriction. If this flag is not set, Misc objects are removed when their parents are removed.
HWLOC_RESTRICT_FLAG_ADAPT_IO	Move I/O objects to ancestors if their parents are removed during restriction. If this flag is not set, I/O devices and bridges are removed when their parents are removed.

23.13.3 Function Documentation

23.13.3.1 hwloc_obj_add_other_obj_sets()

```
int hwloc_obj_add_other_obj_sets (
          hwloc_obj_t dst,
          hwloc_obj_t src )
```

Setup object cpusets/nodesets by OR'ing another object's sets.

For each defined cpuset or nodeset in src, allocate the corresponding set in dst and add src to it by OR'ing sets.

This function is convenient between hwloc_topology_alloc_group_object() and hwloc_topology_insert_group_object(). It builds the sets of the new Group that will be inserted as a new intermediate parent of several objects.

23.13.3.2 hwloc_topology_alloc_group_object()

Allocate a Group object to insert later with hwloc_topology_insert_group_object().

This function returns a new Group object.

The caller should (at least) initialize its sets before inserting the object in the topology. See hwloc_topology_insert_group_object().

23.13.3.3 hwloc topology allow()

```
int hwloc_topology_allow (
                hwloc_topology_t restrict topology,
                hwloc_const_cpuset_t cpuset,
                hwloc_const_nodeset_t nodeset,
                 unsigned long flags )
```

Change the sets of allowed PUs and NUMA nodes in the topology.

This function only works if the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was set on the topology. It does not modify any object, it only changes the sets returned by hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset().

It is notably useful when importing a topology from another process running in a different Linux Cgroup. flags must be set to one flag among hwloc_allow_flags_e.

Note

Removing objects from a topology should rather be performed with hwloc topology restrict().

23.13.3.4 hwloc_topology_insert_group_object()

Add more structure to the topology by adding an intermediate Group.

The caller should first allocate a new Group object with hwloc_topology_alloc_group_object(). Then it must setup at least one of its CPU or node sets to specify the final location of the Group in the topology. Then the object can be passed to this function for actual insertion in the topology.

Either the cpuset or nodeset field (or both, if compatible) must be set to a non-empty bitmap. The complete_cpuset or complete_nodeset may be set instead if inserting with respect to the complete topology (including disallowed, offline or unknown objects). If grouping several objects, hwloc_obj_add_other_obj_sets() is an easy way to build the Group sets iteratively. These sets cannot be larger than the current topology, or they would get restricted silently. The core will setup the other sets after actual insertion.

The subtype object attribute may be defined (to a dynamically allocated string) to display something else than "Group" as the type name for this object in Istopo. Custom name/value info pairs may be added with hww.name/value info () after insertion.

The group dont_merge attribute may be set to 1 to prevent the hwloc core from ever merging this object with another hierarchically-identical object. This is useful when the Group itself describes an important feature that cannot be exposed anywhere else in the hierarchy.

The group kind attribute may be set to a high value such as <code>0xfffffffff</code> to tell hwloc that this new Group should always be discarded in favor of any existing Group with the same locality.

Returns

The inserted object if it was properly inserted.

An existing object if the Group was merged or discarded because the topology already contained an object at the same location (the Group did not add any hierarchy information).

 \mathtt{NULL} if the insertion failed because of conflicting sets in topology tree.

NULL if Group objects are filtered-out of the topology (HWLOC_TYPE_FILTER_KEEP_NONE).

 \mathtt{NULL} if the object was discarded because no set was initialized in the Group before insert, or all of them were empty.

23.13.3.5 hwloc_topology_insert_misc_object()

Add a MISC object as a leaf of the topology.

A new MISC object will be created and inserted into the topology at the position given by parent. It is appended to the list of existing Misc children, without ever adding any intermediate hierarchy level. This is useful for annotating the topology without actually changing the hierarchy.

name is supposed to be unique across all Misc objects in the topology. It will be duplicated to setup the new object attributes.

The new leaf object will not have any cpuset.

Returns

the newly-created object

NULL on error.

NULL if Misc objects are filtered-out of the topology (HWLOC_TYPE_FILTER_KEEP_NONE).

Note

If name contains some non-printable characters, they will be dropped when exporting to XML, see hwloc topology export xml() in hwloc/export.h.

23.13.3.6 hwloc_topology_refresh()

Refresh internal structures after topology modification.

Modifying the topology (by restricting, adding objects, modifying structures such as distances or memory attributes, etc.) may cause some internal caches to become invalid. These caches are automatically refreshed when accessed but this refreshing is not thread-safe.

This function is not thread-safe either, but it is a good way to end a non-thread-safe phase of topology modification. Once this refresh is done, multiple threads may concurrently consult the topology, objects, distances, attributes, etc. See also Thread Safety

23.13.3.7 hwloc_topology_restrict()

```
int hwloc_topology_restrict (
                hwloc_topology_t restrict topology,
                hwloc_const_bitmap_t set,
                 unsigned long flags )
```

Restrict the topology to the given CPU set or nodeset.

Topology topology is modified so as to remove all objects that are not included (or partially included) in the CPU set set. All objects CPU and node sets are restricted accordingly.

If HWLOC_RESTRICT_FLAG_BYNODESET is passed in flags, set is considered a nodeset instead of a CPU set

flags is a OR'ed set of hwloc restrict flags e.

Note

This call may not be reverted by restricting back to a larger set. Once dropped during restriction, objects may not be brought back, except by loading another topology with hwloc_topology_load().

Returns

0 on success.

- -1 with errno set to EINVAL if the input set is invalid. The topology is not modified in this case.
- -1 with errno set to ENOMEM on failure to allocate internal data. The topology is reinitialized in this case. It should be either destroyed with hww.nc.topology_destroy() or configured and loaded again.

23.14 Finding Objects inside a CPU set

Functions

- static hwloc_obj_t hwloc_get_first_largest_obj_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- int hwloc_get_largest_objs_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_t *restrict objs, int max)
- static hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, unsigned idx)
- static hwloc_obj_t hwloc_get_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, unsigned idx)
- static unsigned hwloc_get_nbobjs_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth)
- static int hwloc_get_nbobjs_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type)
- static int hwloc_get_obj_index_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_t obj)

23.14.1 Detailed Description

23.14.2 Function Documentation

23.14.2.1 hwloc_get_first_largest_obj_inside_cpuset()

Get the first largest object included in the given cpuset set.

Returns

the first object that is included in set and whose parent is not.

This is convenient for iterating over all largest objects within a CPU set by doing a loop getting the first largest object and clearing its CPU set from the remaining CPU set.

23.14.2.2 hwloc get largest objs inside cpuset()

Get the set of largest objects covering exactly a given cpuset set.

Returns

the number of objects returned in objs.

23.14.2.3 hwloc get nbobjs inside cpuset by depth()

```
static unsigned hwloc_get_nbobjs_inside_cpuset_by_depth (
    hwloc_topology_t topology,
    hwloc_const_cpuset_t set,
    int depth ) [inline], [static]
```

Return the number of objects at depth depth included in CPU set set.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.14.2.4 hwloc_get_nbobjs_inside_cpuset_by_type()

Return the number of objects of type type included in CPU set set.

If no object for that type exists inside CPU set set, 0 is returned. If there are several levels with objects of that type inside CPU set set, -1 is returned.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O objects).

23.14.2.5 hwloc_get_next_obj_inside_cpuset_by_depth()

Return the next object at depth depth included in CPU set set.

If prev is NULL, return the first object at depth depth included in set. The next invokation should pass the previous return value in prev so as to obtain the next object in set.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.14.2.6 hwloc_get_next_obj_inside_cpuset_by_type()

Return the next object of type type included in CPU set set.

If there are multiple or no depth for given type, return NULL and let the caller fallback to hwloc_get_next_obj_inside_cpuset_by_depth()

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.14.2.7 hwloc get obj index inside cpuset()

Return the logical index among the objects included in CPU set set.

Consult all objects in the same level as obj and inside CPU set set in the logical order, and return the index of obj within them. If set covers the entire topology, this is the logical index of obj. Otherwise, this is similar to a logical index within the part of the topology defined by CPU set set.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if obj does not have CPU sets (I/O objects).

23.14.2.8 hwloc_get_obj_inside_cpuset_by_depth()

Return the (logically) idx -th object at depth depth included in CPU set set.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.14.2.9 hwloc_get_obj_inside_cpuset_by_type()

Return the idx -th object of type type included in CPU set set.

If there are multiple or no depth for given type, return \mathtt{NULL} and let the caller fallback to $\mathsf{hwloc_get_obj_inside_cpuset_by_depth()}$.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.15 Finding Objects covering at least CPU set

Functions

- static hwloc_obj_t hwloc_get_child_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_t parent)
- static hwloc_obj_t hwloc_get_obj_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- static hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, hwloc_obj_t prev)

23.15.1 Detailed Description

23.15.2 Function Documentation

23.15.2.1 hwloc_get_child_covering_cpuset()

Get the child covering at least CPU set set.

Returns

NULL if no child matches or if set is empty.

Note

This function cannot work if parent does not have a CPU set (I/O or Misc objects).

23.15.2.2 hwloc_get_next_obj_covering_cpuset_by_depth()

Iterate through same-depth objects covering at least CPU set set.

If object prev is NULL, return the first object at depth depth covering at least part of CPU set set. The next invokation should pass the previous return value in prev so as to obtain the next object covering at least another part of set.

Note

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.15.2.3 hwloc_get_next_obj_covering_cpuset_by_type()

Iterate through same-type objects covering at least CPU set set.

If object prev is NULL, return the first object of type type covering at least part of CPU set set. The next invokation should pass the previous return value in prev so as to obtain the next object of type type covering at least another part of set.

If there are no or multiple depths for type type, NULL is returned. The caller may fallback to hwloc_get_next_obj_covering_cpuset_by for each depth.

Note

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.15.2.4 hwloc_get_obj_covering_cpuset()

Get the lowest object covering at least CPU set set.

Returns

NULL if no object matches or if set is empty.

23.16 Looking at Ancestor and Child Objects

Functions

- static hwloc obj t hwloc get ancestor obj by depth (hwloc topology t topology, int depth, hwloc obj t obj)
- static hwloc_obj_t hwloc_get_ancestor_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, hwloc_obj_t obj)
- static hwloc_obj_t hwloc_get_common_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t obj1, hwloc obj t obj2)
- static int hwloc_obj_is_in_subtree (hwloc_topology_t topology, hwloc_obj_t obj, hwloc_obj_t subtree_root)
- static hwloc obj t hwloc get next child (hwloc topology t topology, hwloc obj t parent, hwloc obj t prev)

23.16.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.16.2 Function Documentation

23.16.2.1 hwloc_get_ancestor_obj_by_depth()

Returns the ancestor object of obj at depth depth.

Note

depth should not be the depth of PU or NUMA objects since they are ancestors of no objects (except Misc or I/O). This function rather expects an intermediate level depth, such as the depth of Packages, Cores, or Caches.

23.16.2.2 hwloc_get_ancestor_obj_by_type()

Returns the ancestor object of obj with type type.

Note

type should not be HWLOC_OBJ_PU or HWLOC_OBJ_NUMANODE since these objects are ancestors of no objects (except Misc or I/O). This function rather expects an intermediate object type, such as HWLOC_OBJ_PACKAGE, HWLOC_OBJ_CORE, etc.

23.16.2.3 hwloc_get_common_ancestor_obj()

Returns the common parent object to objects obj1 and obj2.

23.16.2.4 hwloc_get_next_child()

Return the next child.

Return the next child among the normal children list, then among the memory children list, then among the I/O children list, then among the Misc children list.

If prev is NULL, return the first child.

Return NULL when there is no next child.

23.16.2.5 hwloc_obj_is_in_subtree()

Returns true if obj is inside the subtree beginning with ancestor object subtree_root.

Note

This function cannot work if obj and subtree_root objects do not have CPU sets (I/O or Misc objects).

23.17 Kinds of object Type

Functions

- int hwloc_obj_type_is_normal (hwloc_obj_type_t type)
- int hwloc_obj_type_is_io (hwloc_obj_type_t type)
- int hwloc_obj_type_is_memory (hwloc_obj_type_t type)
- int hwloc_obj_type_is_cache (hwloc_obj_type_t type)
- int hwloc_obj_type_is_dcache (hwloc_obj_type_t type)
- int hwloc_obj_type_is_icache (hwloc_obj_type_t type)

23.17.1 Detailed Description

Each object type is either Normal (i.e. hwloc_obj_type_is_normal() returns 1), or Memory (i.e. hwloc_obj_type_is_memory() returns 1) or I/O (i.e. hwloc_obj_type_is_io() returns 1) or Misc (i.e. equal to HWLOC_OBJ_MISC). It cannot be of more than one of these kinds.

23.17.2 Function Documentation

23.17.2.1 hwloc_obj_type_is_cache()

Check whether an object type is a CPU Cache (Data, Unified or Instruction).

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a Cache, 0 otherwise.

23.17.2.2 hwloc_obj_type_is_dcache()

Check whether an object type is a CPU Data or Unified Cache.

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a CPU Data or Unified Cache, 0 otherwise.

23.17.2.3 hwloc_obj_type_is_icache()

Check whether an object type is a CPU Instruction Cache,.

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a CPU Instruction Cache, 0 otherwise.

23.17.2.4 hwloc_obj_type_is_io()

Check whether an object type is I/O.

I/O objects are objects attached to their parents in the I/O children list. This current includes Bridges, PCI and OS devices.

Returns

1 if an object of type type is a I/O object, 0 otherwise.

23.17.2.5 hwloc_obj_type_is_memory()

Check whether an object type is Memory.

Memory objects are objects attached to their parents in the Memory children list. This current includes NUMA nodes and Memory-side caches.

Returns

1 if an object of type type is a Memory object, 0 otherwise.

23.17.2.6 hwloc_obj_type_is_normal()

Check whether an object type is Normal.

Normal objects are objects of the main CPU hierarchy (Machine, Package, Core, PU, CPU caches, etc.), but they are not NUMA nodes, I/O devices or Misc objects.

They are attached to parent as Normal children, not as Memory, I/O or Misc children.

Returns

1 if an object of type ${\tt type}$ is a Normal object, 0 otherwise.

23.18 Looking at Cache Objects

Functions

- static int hwloc_get_cache_type_depth (hwloc_topology_t topology, unsigned cachelevel, hwloc_obj_cache_type_t cachetype)
- static hwloc_obj_t hwloc_get_cache_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- static hwloc_obj_t hwloc_get_shared_cache_covering_obj (hwloc_topology_t topology, hwloc_obj_t obj)

23.18.1 Detailed Description

23.18.2 Function Documentation

23.18.2.1 hwloc_get_cache_covering_cpuset()

Get the first data (or unified) cache covering a cpuset set.

Returns

NULL if no cache matches.

23.18.2.2 hwloc_get_cache_type_depth()

```
static int hwloc_get_cache_type_depth (
          hwloc_topology_t topology,
          unsigned cachelevel,
          hwloc_obj_cache_type_t cachetype ) [inline], [static]
```

Find the depth of cache objects matching cache level and type.

Return the depth of the topology level that contains cache objects whose attributes match cachelevel and cachetype.

This function is identical to calling hwloc_get_type_depth() with the corresponding type such as HWLOC_OBJ_L1ICACHE, except that it may also return a Unified cache when looking for an instruction cache.

If no cache level matches, HWLOC TYPE DEPTH UNKNOWN is returned.

If cachetype is HWLOC_OBJ_CACHE_UNIFIED, the depth of the unique matching unified cache level is returned

If cachetype is HWLOC_OBJ_CACHE_DATA or HWLOC_OBJ_CACHE_INSTRUCTION, either a matching cache, or a unified cache is returned.

If cachetype is -1, it is ignored and multiple levels may match. The function returns either the depth of a uniquely matching level or HWLOC TYPE DEPTH MULTIPLE.

23.18.2.3 hwloc get shared cache covering obj()

Get the first data (or unified) cache shared between an object and somebody else.

Returns

NULL if no cache matches or if an invalid object is given.

23.19 Finding objects, miscellaneous helpers

Functions

- int hwloc_bitmap_singlify_per_core (hwloc_topology_t topology, hwloc_bitmap_t cpuset, unsigned which)
- static hwloc_obj_t hwloc_get_pu_obj_by_os_index (hwloc_topology_t topology, unsigned os_index)
- static hwloc_obj_t hwloc_get_numanode_obj_by_os_index (hwloc_topology_t topology, unsigned os_index)
- unsigned hwloc_get_closest_objs (hwloc_topology_t topology, hwloc_obj_t src, hwloc_obj_t *restrict objs, unsigned max)
- static hwloc_obj_t hwloc_get_obj_below_by_type (hwloc_topology_t topology, hwloc_obj_type_t type1, unsigned idx1, hwloc_obj_type_t type2, unsigned idx2)
- static hwloc_obj_t hwloc_get_obj_below_array_by_type (hwloc_topology_t topology, int nr, hwloc_obj_type_t *typev, unsigned *idxv)
- hwloc_obj_t hwloc_get_obj_with_same_locality (hwloc_topology_t topology, hwloc_obj_t src, hwloc_obj_type_t type, const char *subtype, const char *nameprefix, unsigned long flags)

23.19.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.19.2 Function Documentation

23.19.2.1 hwloc_bitmap_singlify_per_core()

Remove simultaneous multithreading PUs from a CPU set.

For each core in topology, if cpuset contains some PUs of that core, modify cpuset to only keep a single PU for that core.

which specifies which PU will be kept. PU are considered in physical index order. If 0, for each core, the function keeps the first PU that was originally set in cpuset.

If which is larger than the number of PUs in a core there were originally set in <code>cpuset</code>, no PU is kept for that core.

Note

PUs that are not below a Core object are ignored (for instance if the topology does not contain any Core object). None of them is removed from <code>cpuset</code>.

23.19.2.2 hwloc_get_closest_objs()

```
unsigned hwloc_get_closest_objs (
          hwloc_topology_t topology,
          hwloc_obj_t src,
          hwloc_obj_t *restrict objs,
          unsigned max )
```

Do a depth-first traversal of the topology to find and sort.

all objects that are at the same depth than src. Report in objs up to max physically closest ones to src.

Returns

the number of objects returned in objs.

0 if src is an I/O object.

Note

This function requires the src object to have a CPU set.

23.19.2.3 hwloc_get_numanode_obj_by_os_index()

Returns the object of type HWLOC_OBJ_NUMANODE with os_index.

This function is useful for converting a nodeset into the NUMA node objects it contains. When retrieving the current binding (e.g. with hwloc_get_membind() with HWLOC_MEMBIND_BYNODESET), one may iterate over the bits of the resulting nodeset with hwloc_bitmap_foreach_begin(), and find the corresponding NUMA nodes with this function.

23.19.2.4 hwloc_get_obj_below_array_by_type()

Find an object below a chain of objects specified by types and indexes.

This is a generalized version of hwloc_get_obj_below_by_type().

Arrays typev and idxv must contain nr types and indexes.

Start from the top system object and walk the arrays typev and idxv. For each type and logical index couple in the arrays, look under the previously found object to find the index-th object of the given type. Indexes are specified within the parent, not withing the entire system.

For instance, if nr is 3, typev contains NODE, PACKAGE and CORE, and idxv contains 0, 1 and 2, return the third core object below the second package below the first NUMA node.

Note

This function requires all these objects and the root object to have a CPU set.

23.19.2.5 hwloc_get_obj_below_by_type()

```
static hwloc_obj_t hwloc_get_obj_below_by_type (
    hwloc_topology_t topology,
    hwloc_obj_type_t type1,
    unsigned idx1,
    hwloc_obj_type_t type2,
    unsigned idx2 ) [inline], [static]
```

Find an object below another object, both specified by types and indexes.

Start from the top system object and find object of type type1 and logical index idx1. Then look below this object and find another object of type type2 and logical index idx2. Indexes are specified within the parent, not withing the entire system.

For instance, if type1 is PACKAGE, idx1 is 2, type2 is CORE and idx2 is 3, return the fourth core object below the third package.

Note

This function requires these objects to have a CPU set.

23.19.2.6 hwloc_get_obj_with_same_locality()

```
hwloc_obj_t hwloc_get_obj_with_same_locality (
    hwloc_topology_t topology,
    hwloc_obj_t src,
    hwloc_obj_type_t type,
    const char * subtype,
    const char * nameprefix,
    unsigned long flags )
```

Return an object of a different type with same locality.

If the source object src is a normal or memory type, this function returns an object of type type with same CPU and node sets, either below or above in the hierarchy.

If the source object <code>src</code> is a PCI or an OS device within a PCI device, the function may either return that PCI device, or another OS device in the same PCI parent. This may for instance be useful for converting between OS devices such as "nvml0" or "rsmi1" used in distance structures into the PCI device, or the CUDA or OpenCL OS device that correspond to the same physical card.

If not \mathtt{NULL} , parameter $\mathtt{subtype}$ only select objects whose subtype attribute exists and is $\mathtt{subtype}$ (case-insensitively), for instance "OpenCL" or "CUDA".

If not NULL, parameter nameprefix only selects objects whose name attribute exists and starts with nameprefix (case-insensitively), for instance "rsmi" for matching "rsmi0".

If multiple objects match, the first one is returned.

This function will not walk the hierarchy across bridges since the PCI locality may become different. This function cannot also convert between normal/memory objects and I/O or Misc objects.

flags must be 0 for now.

Returns

An object with identical locality, matching subtype and nameprefix if any.

NULL if no matching object could be found, or if the source object and target type are incompatible, for instance if converting between CPU and I/O objects.

23.19.2.7 hwloc_get_pu_obj_by_os_index()

Returns the object of type HWLOC_OBJ_PU with os_index.

This function is useful for converting a CPU set into the PU objects it contains. When retrieving the current binding (e.g. with hwloc_get_cpubind()), one may iterate over the bits of the resulting CPU set with hwloc_bitmap_foreach_begin(), and find the corresponding PUs with this function.

23.20 Distributing items over a topology

Enumerations

enum hwloc_distrib_flags_e { HWLOC_DISTRIB_FLAG_REVERSE }

Functions

static int hwloc_distrib (hwloc_topology_t topology, hwloc_obj_t *roots, unsigned n_roots, hwloc_cpuset_t *set, unsigned n, int until, unsigned long flags)

23.20.1 Detailed Description

23.20.2 Enumeration Type Documentation

23.20.2.1 hwloc_distrib_flags_e

```
enum hwloc_distrib_flags_e
Flags to be given to hwloc_distrib().
```

Enumerator

HWLOC DISTRIB FLAG REVERSE | Distrib in reverse order, starting from the last objects.

23.20.3 Function Documentation

23.20.3.1 hwloc_distrib()

```
static int hwloc_distrib (
    hwloc_topology_t topology,
    hwloc_obj_t * roots,
    unsigned n_roots,
    hwloc_cpuset_t * set,
    unsigned n,
    int until,
    unsigned long flags ) [inline], [static]
```

Distribute n items over the topology under roots.

Array set will be filled with n cpusets recursively distributed linearly over the topology under objects roots, down to depth until (which can be INT MAX to distribute down to the finest level).

n_roots is usually 1 and roots only contains the topology root object so as to distribute over the entire topology. This is typically useful when an application wants to distribute n threads over a machine, giving each of them as much private cache as possible and keeping them locally in number order.

The caller may typically want to also call hwloc bitmap singlify() before binding a thread so that it does not move at

flags should be 0 or a OR'ed set of hwloc distrib flags e.

Note

This function requires the roots objects to have a CPU set.

This function replaces the now deprecated hwloc distribute() and hwloc distributev() functions.

23.21 CPU and node sets of entire topologies

Functions

- hwloc_const_cpuset_t hwloc_topology_get_complete_cpuset (hwloc_topology_t topology)
- hwloc_const_cpuset_t hwloc_topology_get_topology_cpuset (hwloc_topology_t topology)
- hwloc_const_cpuset_t hwloc_topology_get_allowed_cpuset (hwloc_topology_t topology)
- hwloc_const_nodeset_t hwloc_topology_get_complete_nodeset (hwloc_topology_t topology)
- hwloc const nodeset thwloc topology get topology nodeset (hwloc topology)
- hwloc_const_nodeset_t hwloc_topology_get_allowed_nodeset (hwloc_topology_t topology)

23.21.1 Detailed Description

23.21.2 Function Documentation

23.21.2.1 hwloc topology get allowed cpuset()

```
hwloc_const_cpuset_t hwloc_topology_get_allowed_cpuset (
             hwloc_topology_t topology )
```

Get allowed CPU set.

Returns

the CPU set of allowed processors of the system.

Note

If the topology flag HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was not set, this is identical to hwloc_topology_get_topology_cpuset(), which means all PUs are allowed.

If HWLOC TOPOLOGY FLAG INCLUDE DISALLOWED was set, applying hwloc bitmap intersects() on the result of this function and on an object cpuset checks whether there are allowed PUs inside that object. Applying hwloc bitmap and() returns the list of these allowed PUs.

The returned cpuset is not newly allocated and should thus not be changed or freed, hwloc bitmap dup() must be used to obtain a local copy.

23.21.2.2 hwloc_topology_get_allowed_nodeset()

```
hwloc_const_nodeset_t hwloc_topology_get_allowed_nodeset (
             hwloc_topology_t topology )
Get allowed node set.
```

Returns

the node set of allowed memory of the system.

Note

If the topology flag HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was not set, this is identical to hwloc_topology_get_topology_nodeset(), which means all NUMA nodes are allowed.

If HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was set, applying hwloc_bitmap_intersects() on the result of this function and on an object nodeset checks whether there are allowed NUMA nodes inside that object. Applying hwloc_bitmap_and() returns the list of these allowed NUMA nodes.

The returned nodeset is not newly allocated and should thus not be changed or freed, hwloc_bitmap_dup() must be used to obtain a local copy.

23.21.2.3 hwloc_topology_get_complete_cpuset()

```
\label{loc_const_cpuset_theorem}  \begin{array}{c} \text{hwloc\_topology\_get\_complete\_cpuset} \ \ (\\ \text{hwloc\_topology\_t} \ \ topology \ \ ) \\ \text{Get complete CPU set.} \end{array}
```

Returns

the complete CPU set of processors of the system.

Note

The returned cpuset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object complete CPU-set.

23.21.2.4 hwloc_topology_get_complete_nodeset()

Returns

the complete node set of memory of the system.

Note

The returned nodeset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object complete nodeset.

23.21.2.5 hwloc_topology_get_topology_cpuset()

Returns

the CPU set of processors of the system for which hwloc provides topology information. This is equivalent to the cpuset of the system object.

Note

The returned cpuset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object CPU-set.

23.21.2.6 hwloc_topology_get_topology_nodeset()

Get topology node set.

Returns

the node set of memory of the system for which hwloc provides topology information. This is equivalent to the nodeset of the system object.

Note

The returned nodeset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object nodeset.

23.22 Converting between CPU sets and node sets

Functions

- static int hwloc_cpuset_to_nodeset (hwloc_topology_t topology, hwloc_const_cpuset_t_cpuset, hwloc_nodeset_t nodeset)
- static int hwloc_cpuset_from_nodeset (hwloc_topology_t topology, hwloc_cpuset_t_cpuset, hwloc_const_nodeset_t nodeset)

23.22.1 Detailed Description

23.22.2 Function Documentation

23.22.2.1 hwloc cpuset from nodeset()

Convert a NUMA node set into a CPU set.

For each NUMA node included in the input nodeset, set the corresponding local PUs in the output _cpuset. If some CPUs have no local NUMA nodes, this function never sets their indexes in the output CPU set, even if a full node set is given in input.

Hence the entire topology node set is converted into the set of all CPUs that have some local NUMA nodes.

23.22.2.2 hwloc cpuset to nodeset()

Convert a CPU set into a NUMA node set.

For each PU included in the input _cpuset, set the corresponding local NUMA node(s) in the output nodeset.

If some NUMA nodes have no CPUs at all, this function never sets their indexes in the output node set, even if a full CPU set is given in input.

Hence the entire topology CPU set is converted into the set of all nodes that have some local CPUs.

23.23 Finding I/O objects

Functions

- static hwloc_obj_t hwloc_get_non_io_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t ioobj)
- static hwloc_obj_t hwloc_get_next_pcidev (hwloc_topology_t topology, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_pcidev_by_busid (hwloc_topology_t topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- static hwloc_obj_t hwloc_get_pcidev_by_busidstring (hwloc_topology_t topology, const char *busid)
- static hwloc_obj_t hwloc_get_next_osdev (hwloc_topology_t topology, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_bridge (hwloc_topology_t topology, hwloc_obj_t prev)
- static int hwloc bridge covers pcibus (hwloc obj t bridge, unsigned domain, unsigned bus)

23.23.1 Detailed Description

23.23.2 Function Documentation

23.23.2.1 hwloc_bridge_covers_pcibus()

```
static int hwloc_bridge_covers_pcibus (
          hwloc_obj_t bridge,
          unsigned domain,
          unsigned bus ) [inline], [static]
```

23.23.2.2 hwloc_get_next_bridge()

Get the next bridge in the system.

Returns

the first bridge if prev is NULL.

23.23.2.3 hwloc_get_next_osdev()

Get the next OS device in the system.

Returns

the first OS device if prev is NULL.

23.23.2.4 hwloc_get_next_pcidev()

Get the next PCI device in the system.

Returns

the first PCI device if prev is NULL.

23.23.2.5 hwloc_get_non_io_ancestor_obj()

Get the first non-I/O ancestor object.

Given the I/O object ioobj, find the smallest non-I/O ancestor object. This object (normal or memory) may then be used for binding because it has non-NULL CPU and node sets and because its locality is the same as ioobj.

Note

The resulting object is usually a normal object but it could also be a memory object (e.g. NUMA node) in future platforms if I/O objects ever get attached to memory instead of CPUs.

23.23.2.6 hwloc_get_pcidev_by_busid()

```
static hwloc_obj_t hwloc_get_pcidev_by_busid (
    hwloc_topology_t topology,
    unsigned domain,
    unsigned bus,
    unsigned dev,
    unsigned func ) [inline], [static]
```

Find the PCI device object matching the PCI bus id given domain, bus device and function PCI bus id.

23.23.2.7 hwloc_get_pcidev_by_busidstring()

Find the PCI device object matching the PCI bus id given as a string xxxx:yy:zz.t or yy:zz.t.

23.24 The bitmap API

Macros

- #define hwloc_bitmap_foreach_begin(id, bitmap)
- #define hwloc_bitmap_foreach_end()

Typedefs

- typedef struct hwloc_bitmap_s * hwloc_bitmap_t
- typedef const struct hwloc_bitmap_s * hwloc_const_bitmap_t

23.24 The bitmap API 137

Functions

- · hwloc bitmap t hwloc bitmap alloc (void)
- · hwloc bitmap thwloc bitmap alloc full (void)
- void hwloc bitmap free (hwloc bitmap t bitmap)
- hwloc_bitmap_t hwloc_bitmap_dup (hwloc_const_bitmap_t bitmap)
- int hwloc bitmap copy (hwloc bitmap t dst, hwloc const bitmap t src)
- int hwloc_bitmap_snprintf (char *restrict buf, size_t buflen, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- int hwloc_bitmap_list_snprintf (char *restrict buf, size_t buflen, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_list_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_list_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- int hwloc_bitmap_taskset_snprintf (char *restrict buf, size_t buflen, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_taskset_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_taskset_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- · void hwloc bitmap zero (hwloc bitmap t bitmap)
- · void hwloc bitmap fill (hwloc bitmap t bitmap)
- int hwloc bitmap only (hwloc bitmap t bitmap, unsigned id)
- int hwloc_bitmap_allbut (hwloc_bitmap_t bitmap, unsigned id)
- int hwloc_bitmap_from_ulong (hwloc_bitmap_t bitmap, unsigned long mask)
- · int hwloc bitmap from ith ulong (hwloc bitmap t bitmap, unsigned i, unsigned long mask)
- int hwloc_bitmap_from_ulongs (hwloc_bitmap_t bitmap, unsigned nr, const unsigned long *masks)
- int hwloc bitmap set (hwloc bitmap t bitmap, unsigned id)
- int hwloc bitmap set range (hwloc bitmap t bitmap, unsigned begin, int end)
- int hwloc bitmap set ith ulong (hwloc bitmap t bitmap, unsigned i, unsigned long mask)
- int hwloc bitmap clr (hwloc bitmap t bitmap, unsigned id)
- int hwloc_bitmap_clr_range (hwloc_bitmap_t bitmap, unsigned begin, int end)
- int hwloc_bitmap_singlify (hwloc_bitmap_t bitmap)
- unsigned long hwloc_bitmap_to_ulong (hwloc_const_bitmap_t bitmap)
- unsigned long hwloc_bitmap_to_ith_ulong (hwloc_const_bitmap_t bitmap, unsigned i)
- int hwloc_bitmap_to_ulongs (hwloc_const_bitmap_t bitmap, unsigned nr, unsigned long *masks)
- int hwloc_bitmap_nr_ulongs (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_isset (hwloc_const_bitmap_t bitmap, unsigned id)
- int hwloc_bitmap_iszero (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_isfull (hwloc_const_bitmap_t bitmap)
- int hwloc bitmap first (hwloc const bitmap t bitmap)
- int hwloc bitmap next (hwloc const bitmap t bitmap, int prev)
- int hwloc_bitmap_last (hwloc_const_bitmap_t bitmap)
- int hwloc bitmap weight (hwloc const bitmap t bitmap)
- int hwloc bitmap first unset (hwloc const bitmap t bitmap)
- int hwloc_bitmap_next_unset (hwloc_const_bitmap_t bitmap, int prev)
- int hwloc_bitmap_last_unset (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_or (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc_bitmap_and (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc_bitmap_andnot (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap_t bitmap2)
- int hwloc_bitmap_xor (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap_t bitmap2)
- int hwloc bitmap not (hwloc bitmap t res, hwloc const bitmap t bitmap)
- int hwloc bitmap intersects (hwloc const bitmap t bitmap1, hwloc const bitmap t bitmap2)
- int hwloc bitmap isincluded (hwloc const bitmap t sub bitmap, hwloc const bitmap t super bitmap)
- int hwloc bitmap isequal (hwloc const bitmap t bitmap1, hwloc const bitmap t bitmap2)
- int hwloc bitmap compare first (hwloc const bitmap t bitmap t bitmap t bitmap t bitmap t)
- int hwloc_bitmap_compare (hwloc_const_bitmap_t bitmap_t bitmap_t bitmap_t bitmap_t)

23.24.1 Detailed Description

The hwloc_bitmap_t type represents a set of integers (positive or null). A bitmap may be of infinite size (all bits are set after some point). A bitmap may even be full if all bits are set.

Bitmaps are used by hwloc for sets of OS processors (which may actually be hardware threads) as by hwloc_cpuset_t (a typedef for hwloc_bitmap_t), or sets of NUMA memory nodes as hwloc_nodeset_t (also a typedef for hwloc_bitmap_t). Those are used for cpuset and nodeset fields in the hwloc_obj structure, see Object Sets (hwloc_cpuset_t and hwloc_nodeset_t).

Both CPU and node sets are always indexed by OS physical number. However users should usually not build CPU and node sets manually (e.g. with hww.number.to.

```
hwloc_obj_t corel = ..., core2 = ...;
hwloc_bitmap_t set = hwloc_bitmap_alloc();
hwloc_bitmap_or(set, corel->cpuset, core2->cpuset);
hwloc_set_cpubind(topology, set, HWLOC_CPUBIND_THREAD);
hwloc_bitmap_free(set);
```

Note

Most functions below return an int that may be negative in case of error. The usual error case would be an internal failure to realloc/extend the storage of the bitmap (error would be set to ENOMEM).

Several examples of using the bitmap API are available under the doc/examples/ directory in the source tree. Regression tests such as tests/hwloc/hwloc_bitmap*.c also make intensive use of this API.

23.24.2 Macro Definition Documentation

23.24.2.1 hwloc bitmap foreach begin

Loop macro iterating on bitmap bitmap.

The loop must start with hwloc_bitmap_foreach_begin() and end with hwloc_bitmap_foreach_end() followed by a terminating ';'.

index is the loop variable; it should be an unsigned int. The first iteration will set index to the lowest index in the bitmap. Successive iterations will iterate through, in order, all remaining indexes set in the bitmap. To be specific: each iteration will return a value for index such that hwloc_bitmap_isset(bitmap, index) is true.

The assert prevents the loop from being infinite if the bitmap is infinitely set.

23.24.2.2 hwloc_bitmap_foreach_end

```
#define hwloc_bitmap_foreach_end()
End of loop macro iterating on a bitmap.
Needs a terminating ';'.
```

See also

hwloc_bitmap_foreach_begin()

23.24.3 Typedef Documentation

23.24.3.1 hwloc_bitmap_t

```
typedef struct hwloc_bitmap_s* hwloc_bitmap_t
```

Set of bits represented as an opaque pointer to an internal bitmap.

23.24 The bitmap API 139

23.24.3.2 hwloc_const_bitmap_t

```
typedef const struct hwloc_bitmap_s* hwloc_const_bitmap_t
a non-modifiable hwloc_bitmap_t
```

23.24.4 Function Documentation

23.24.4.1 hwloc_bitmap_allbut()

23.24.4.2 hwloc_bitmap_alloc()

Returns

A valid bitmap or NULL.

The bitmap should be freed by a corresponding call to hwloc_bitmap_free().

23.24.4.3 hwloc_bitmap_alloc_full()

Allocate a new full bitmap.

23.24.4.4 hwloc_bitmap_and()

And bitmaps bitmap1 and bitmap2 and store the result in bitmap res. res can be the same as bitmap1 or bitmap2

23.24.4.5 hwloc_bitmap_andnot()

```
int hwloc_bitmap_andnot (
          hwloc_bitmap_t res,
          hwloc_const_bitmap_t bitmap1,
          hwloc_const_bitmap_t bitmap2 )
```

And bitmap bitmap1 and the negation of bitmap2 and store the result in bitmap res. res can be the same as bitmap1 or bitmap2

23.24.4.6 hwloc bitmap asprintf()

Stringify a bitmap into a newly allocated string.

Returns

-1 on error.

23.24.4.7 hwloc bitmap clr()

```
int hwloc_bitmap_clr (
          hwloc_bitmap_t bitmap,
          unsigned id )
```

Remove index id from bitmap bitmap.

23.24.4.8 hwloc_bitmap_clr_range()

Remove indexes from begin to end in bitmap bitmap.

If end is -1, the range is infinite.

23.24.4.9 hwloc_bitmap_compare()

Compare bitmaps bitmap1 and bitmap2 in lexicographic order.

Lexicographic comparison of bitmaps, starting for their highest indexes. Compare last indexes first, then second, etc. The empty bitmap is considered lower than anything.

Returns

- -1 if bitmap1 is considered smaller than bitmap2.
- 1 if bitmap1 is considered larger than bitmap2.
- 0 if bitmaps are equal (contrary to hwloc_bitmap_compare_first()).

For instance comparing binary bitmaps 0011 and 0110 returns -1 (hence 0011 is considered smaller than 0110). Comparing 00101 and 01010 returns -1 too.

Note

This is different from the non-existing hwloc_bitmap_compare_last() which would only compare the highest index of each bitmap.

23.24.4.10 hwloc_bitmap_compare_first()

Compare bitmaps bitmap1 and bitmap2 using their lowest index.

A bitmap is considered smaller if its least significant bit is smaller. The empty bitmap is considered higher than anything (because its least significant bit does not exist).

23.24 The bitmap API 141

Returns

- -1 if bitmap1 is considered smaller than bitmap2.
- 1 if bitmap1 is considered larger than bitmap2.

For instance comparing binary bitmaps 0011 and 0110 returns -1 (hence 0011 is considered smaller than 0110) because least significant bit of 0011 (0001) is smaller than least significant bit of 0110 (0010). Comparing 01001 and 00110 would also return -1 for the same reason.

Returns

0 if bitmaps are considered equal, even if they are not strictly equal. They just need to have the same least significant bit. For instance, comparing binary bitmaps 0010 and 0110 returns 0 because they have the same least significant bit.

23.24.4.11 hwloc_bitmap_copy()

Copy the contents of bitmap src into the already allocated bitmap dst.

23.24.4.12 hwloc_bitmap_dup()

Duplicate bitmap bitmap by allocating a new bitmap and copying bitmap contents. If bitmap is NULL, NULL is returned.

23.24.4.13 hwloc_bitmap_fill()

```
void hwloc_bitmap_fill (
          hwloc_bitmap_t bitmap )
```

Fill bitmap bitmap with all possible indexes (even if those objects don't exist or are otherwise unavailable)

23.24.4.14 hwloc bitmap first()

Compute the first index (least significant bit) in bitmap \mathtt{bitmap} .

Returns

-1 if no index is set in bitmap.

23.24.4.15 hwloc_bitmap_first_unset()

Compute the first unset index (least significant bit) in bitmap bitmap.

Returns

-1 if no index is unset in bitmap.

23.24.4.16 hwloc_bitmap_free()

23.24.4.17 hwloc bitmap from ith ulong()

```
int hwloc_bitmap_from_ith_ulong (
          hwloc_bitmap_t bitmap,
          unsigned i,
          unsigned long mask )
```

Setup bitmap bitmap from unsigned long mask used as i -th subset.

23.24.4.18 hwloc_bitmap_from_ulong()

Setup bitmap bitmap from unsigned long mask.

23.24.4.19 hwloc_bitmap_from_ulongs()

Setup bitmap bitmap from unsigned longs masks used as first nr subsets.

23.24.4.20 hwloc bitmap intersects()

Test whether bitmaps bitmap1 and bitmap2 intersects.

Returns

1 if bitmaps intersect, 0 otherwise.

23.24.4.21 hwloc_bitmap_isequal()

Test whether bitmap bitmap1 is equal to bitmap bitmap2.

Returns

1 if bitmaps are equal, 0 otherwise.

23.24 The bitmap API 143

23.24.4.22 hwloc_bitmap_isfull()

Test whether bitmap bitmap is completely full.

Returns

1 if bitmap is full, 0 otherwise.

Note

A full bitmap is always infinitely set.

23.24.4.23 hwloc bitmap isincluded()

Test whether bitmap sub_bitmap is part of bitmap super_bitmap.

Returns

1 if sub_bitmap is included in super_bitmap, 0 otherwise.

Note

The empty bitmap is considered included in any other bitmap.

23.24.4.24 hwloc bitmap isset()

Test whether index id is part of bitmap bitmap.

Returns

1 if the bit at index id is set in bitmap bitmap, 0 otherwise.

23.24.4.25 hwloc bitmap iszero()

Test whether bitmap bitmap is empty.

Returns

1 if bitmap is empty, 0 otherwise.

23.24.4.26 hwloc_bitmap_last()

Compute the last index (most significant bit) in bitmap bitmap.

Returns

-1 if no index is set in bitmap, or if bitmap is infinitely set.

23.24.4.27 hwloc_bitmap_last_unset()

Compute the last unset index (most significant bit) in bitmap bitmap.

Returns

-1 if no index is unset in bitmap, or if bitmap is infinitely set.

23.24.4.28 hwloc_bitmap_list_asprintf()

Stringify a bitmap into a newly allocated list string.

Returns

-1 on error.

23.24.4.29 hwloc_bitmap_list_snprintf()

Stringify a bitmap in the list format.

Lists are comma-separated indexes or ranges. Ranges are dash separated indexes. The last range may not have an ending indexes if the bitmap is infinitely set.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of character that were actually written if not truncating, or that would have been written (not including the ending 0).

23.24.4.30 hwloc_bitmap_list_sscanf()

Parse a list string and stores it in bitmap ${\tt bitmap}$.

23.24.4.31 hwloc_bitmap_next()

Compute the next index in bitmap bitmap which is after index prev.

If prev is -1, the first index is returned.

Returns

-1 if no index with higher index is set in bitmap.

23.24 The bitmap API 145

23.24.4.32 hwloc_bitmap_next_unset()

Compute the next unset index in bitmap bitmap which is after index prev.

If prev is -1, the first unset index is returned.

Returns

-1 if no index with higher index is unset in bitmap.

23.24.4.33 hwloc_bitmap_not()

Negate bitmap bitmap and store the result in bitmap res.

res can be the same as bitmap

23.24.4.34 hwloc_bitmap_nr_ulongs()

Return the number of unsigned longs required for storing bitmap bitmap entirely.

This is the number of contiguous unsigned longs from the very first bit of the bitmap (even if unset) up to the last set bit. This is useful for knowing the nr parameter to pass to hwloc_bitmap_to_ulongs() (or which calls to hwloc_bitmap_to_ith_ulong() are needed) to entirely convert a bitmap into multiple unsigned longs.

When called on the output of hwloc_topology_get_topology_cpuset(), the returned number is large enough for all cpusets of the topology.

Returns

-1 if bitmap is infinite.

23.24.4.35 hwloc_bitmap_only()

Empty the bitmap bitmap and add bit id.

23.24.4.36 hwloc_bitmap_or()

Or bitmaps $\mathtt{bitmap1}$ and $\mathtt{bitmap2}$ and store the result in bitmap $\mathtt{res}.$

 $\verb"res" \textbf{ can be the same as} \verb"bitmap" 1 \textbf{ or} \verb"bitmap" 2$

23.24.4.37 hwloc bitmap set()

Add index id in bitmap bitmap.

23.24.4.38 hwloc_bitmap_set_ith_ulong()

```
int hwloc_bitmap_set_ith_ulong (
          hwloc_bitmap_t bitmap,
          unsigned i,
          unsigned long mask )
```

Replace i -th subset of bitmap bitmap with unsigned long mask.

23.24.4.39 hwloc_bitmap_set_range()

```
int hwloc_bitmap_set_range (
          hwloc_bitmap_t bitmap,
          unsigned begin,
          int end )
```

Add indexes from begin to end in bitmap bitmap.

If end is -1, the range is infinite.

23.24.4.40 hwloc_bitmap_singlify()

Keep a single index among those set in bitmap bitmap.

May be useful before binding so that the process does not have a chance of migrating between multiple processors in the original mask. Instead of running the task on any PU inside the given CPU set, the operating system scheduler will be forced to run it on a single of these PUs. It avoids a migration overhead and cache-line ping-pongs between PUs.

Note

This function is NOT meant to distribute multiple processes within a single CPU set. It always return the same single bit when called multiple times on the same input set. hwloc_distrib()) may be used for generating CPU sets to distribute multiple tasks below a single multi-PU object.

This function cannot be applied to an object set directly. It should be applied to a copy (which may be obtained with hwloc_bitmap_dup()).

23.24.4.41 hwloc_bitmap_snprintf()

Stringify a bitmap.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of character that were actually written if not truncating, or that would have been written (not including the ending \0).

23.24.4.42 hwloc bitmap sscanf()

Parse a bitmap string and stores it in bitmap bitmap.

23.24 The bitmap API 147

23.24.4.43 hwloc_bitmap_taskset_asprintf()

Stringify a bitmap into a newly allocated taskset-specific string.

Returns

-1 on error.

23.24.4.44 hwloc_bitmap_taskset_snprintf()

Stringify a bitmap in the taskset-specific format.

The taskset command manipulates bitmap strings that contain a single (possible very long) hexadecimal number starting with 0x.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of character that were actually written if not truncating, or that would have been written (not including the ending \0).

23.24.4.45 hwloc_bitmap_taskset_sscanf()

```
int hwloc_bitmap_taskset_sscanf (
          hwloc_bitmap_t bitmap,
          const char *restrict string )
```

Parse a taskset-specific bitmap string and stores it in bitmap bitmap.

23.24.4.46 hwloc_bitmap_to_ith_ulong()

```
unsigned long hwloc_bitmap_to_ith_ulong ( \label{eq:hwloc_const_bitmap_t} \begin{subarray}{ll} hwloc_const_bitmap_t \begin{subarray}{ll} bitmap, \\ unsigned \begin{subarray}{ll} unsigned \begin{subarray}{ll} i\end{subarray} \end{subarray}
```

Convert the $\mbox{$\tt i$}$ -th subset of bitmap $\mbox{\tt bitmap}$ into unsigned long mask.

23.24.4.47 hwloc_bitmap_to_ulong()

Convert the beginning part of bitmap bitmap into unsigned long mask.

23.24.4.48 hwloc_bitmap_to_ulongs()

Convert the first nr subsets of bitmap bitmap into the array of nr unsigned long masks. nr may be determined earlier with hwloc_bitmap_nr_ulongs().

Returns

0

23.24.4.49 hwloc_bitmap_weight()

Compute the "weight" of bitmap bitmap (i.e., number of indexes that are in the bitmap).

Returns

the number of indexes that are in the bitmap.

-1 if bitmap is infinitely set.

23.24.4.50 hwloc bitmap xor()

Xor bitmaps bitmap1 and bitmap2 and store the result in bitmap res.

res can be the same as bitmap1 or bitmap2

23.24.4.51 hwloc bitmap zero()

23.25 Exporting Topologies to XML

Enumerations

enum hwloc topology export xml flags e { HWLOC TOPOLOGY EXPORT XML FLAG V1 }

Functions

- int hwloc_topology_export_xml (hwloc_topology_t topology, const char *xmlpath, unsigned long flags)
- int hwloc_topology_export_xmlbuffer (hwloc_topology_t topology, char **xmlbuffer, int *buflen, unsigned long flags)
- void hwloc_free_xmlbuffer (hwloc_topology_t topology, char *xmlbuffer)
- void hwloc_topology_set_userdata_export_callback (hwloc_topology_t topology, void(*export_cb)(void *reserved, hwloc_topology_t topology, hwloc_obj_t obj))
- int hwloc_export_obj_userdata (void *reserved, hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size_t length)
- int hwloc_export_obj_userdata_base64 (void *reserved, hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size t length)
- void hwloc_topology_set_userdata_import_callback (hwloc_topology_t topology, void(*import_cb)(hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size_t length))

23.25.1 Detailed Description

23.25.2 Enumeration Type Documentation

23.25.2.1 hwloc_topology_export_xml_flags_e

```
enum hwloc_topology_export_xml_flags_e
```

Flags for exporting XML topologies.

Flags to be given as a OR'ed set to hwloc_topology_export_xml().

Enumerator

```
HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 Export XML that is loadable by hwloc v1.x. However, the export may miss some details about the topology.
```

23.25.3 Function Documentation

23.25.3.1 hwloc export obj userdata()

```
int hwloc_export_obj_userdata (
    void * reserved,
    hwloc_topology_t topology,
    hwloc_obj_t obj,
    const char * name,
    const void * buffer,
    size_t length )
```

Export some object userdata to XML.

This function may only be called from within the export() callback passed to hwloc_topology_set_userdata_export_callback(). It may be invoked one of multiple times to export some userdata to XML. The buffer content of length length is stored with optional name name.

When importing this XML file, the import() callback (if set) will be called exactly as many times as hwloc_export_obj_userdata() was called during export(). It will receive the corresponding name, buffer and length arguments.

reserved, topology and obj must be the first three parameters that were given to the export callback. Only printable characters may be exported to XML string attributes. If a non-printable character is passed in name or buffer, the function returns -1 with errno set to EINVAL.

If exporting binary data, the application should first encode into printable characters only (or use https://www.nwincommons.org/buserdata_base64() It should also take care of portability issues if the export may be reimported on a different architecture.

23.25.3.2 hwloc_export_obj_userdata_base64()

Encode and export some object userdata to XML.

This function is similar to hwloc_export_obj_userdata() but it encodes the input buffer into printable characters before exporting. On import, decoding is automatically performed before the data is given to the import() callback if any.

This function may only be called from within the export() callback passed to <a href="https://www.nuber.com/hullows.nube

23.25.3.3 hwloc_free_xmlbuffer()

Free a buffer allocated by hwloc_topology_export_xmlbuffer()

23.25.3.4 hwloc_topology_export_xml()

```
int hwloc_topology_export_xml (
          hwloc_topology_t topology,
          const char * xmlpath,
          unsigned long flags)
```

Export the topology into an XML file.

This file may be loaded later through hwloc topology set xml().

By default, the latest export format is used, which means older hwloc releases (e.g. v1.x) will not be able to import it. Exporting to v1.x specific XML format is possible using flag HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 but it may miss some details about the topology. If there is any chance that the exported file may ever be imported back by a process using hwloc 1.x, one should consider detecting it at runtime and using the corresponding export format.

flags is a OR'ed set of hwloc_topology_export_xml_flags_e.

Returns

-1 if a failure occured.

Note

See also hwloc_topology_set_userdata_export_callback() for exporting application-specific object userdata.

The topology-specific userdata pointer is ignored when exporting to XML.

Only printable characters may be exported to XML string attributes. Any other character, especially any non-ASCII character, will be silently dropped.

If name is "-", the XML output is sent to the standard output.

23.25.3.5 hwloc_topology_export_xmlbuffer()

```
int hwloc_topology_export_xmlbuffer (
          hwloc_topology_t topology,
          char ** xmlbuffer,
          int * buflen,
          unsigned long flags )
```

Export the topology into a newly-allocated XML memory buffer.

xmlbuffer is allocated by the callee and should be freed with hwloc_free_xmlbuffer() later in the caller.

This memory buffer may be loaded later through https://www.topology_set_xmlbuffer().

By default, the latest export format is used, which means older hwloc releases (e.g. v1.x) will not be able to import it. Exporting to v1.x specific XML format is possible using flag HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 but it may miss some details about the topology. If there is any chance that the exported buffer may ever be imported back by a process using hwloc 1.x, one should consider detecting it at runtime and using the corresponding export format.

The returned buffer ends with a \0 that is included in the returned length.

flags is a OR'ed set of hwloc topology export xml flags e.

Returns

-1 if a failure occured.

Note

See also hwloc_topology_set_userdata_export_callback() for exporting application-specific object userdata.

The topology-specific userdata pointer is ignored when exporting to XML.

Only printable characters may be exported to XML string attributes. Any other character, especially any non-ASCII character, will be silently dropped.

23.25.3.6 hwloc_topology_set_userdata_export_callback()

Set the application-specific callback for exporting object userdata.

The object userdata pointer is not exported to XML by default because hwloc does not know what it contains.

This function lets applications set <code>export_cb</code> to a callback function that converts this opaque userdata into an exportable string.

export_cb is invoked during XML export for each object whose userdata pointer is not NULL. The callback should use hwloc_export_obj_userdata() or hwloc_export_obj_userdata_base64() to actually export something to XML (possibly multiple times per object).

export cb may be set to NULL if userdata should not be exported to XML.

Note

The topology-specific userdata pointer is ignored when exporting to XML.

23.25.3.7 hwloc topology set userdata import callback()

Set the application-specific callback for importing userdata.

On XML import, userdata is ignored by default because hwloc does not know how to store it in memory.

This function lets applications set import_cb to a callback function that will get the XML-stored userdata and store it in the object as expected by the application.

import_cb is called during hwloc_topology_load() as many times as hwloc_export_obj_userdata() was called during export. The topology is not entirely setup yet. Object attributes are ready to consult, but links between objects are not.

import_cb may be NULL if userdata should be ignored during import.

Note

buffer contains length characters followed by a null byte ('\0').

This function should be called before https://www.topology_load().

The topology-specific userdata pointer is ignored when importing from XML.

23.26 Exporting Topologies to Synthetic

Enumerations

enum hwloc_topology_export_synthetic_flags_e { HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO_EXTENDED_TY
, HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO_ATTRS, HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_IGNORE_MEMORY }

Functions

• int hwloc_topology_export_synthetic (hwloc_topology_t topology, char *buffer, size_t buflen, unsigned long flags)

23.26.1 Detailed Description

23.26.2 Enumeration Type Documentation

23.26.2.1 hwloc_topology_export_synthetic_flags_e

```
enum hwloc_topology_export_synthetic_flags_e
```

Flags for exporting synthetic topologies.

Flags to be given as a OR'ed set to hwloc_topology_export_synthetic().

Enumerator

HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_↔ FLAG_NO_EXTENDED_TYPES	Export extended types such as L2dcache as basic types such as Cache. This is required if loading the synthetic description with hwloc < 1.9.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_↔ FLAG_NO_ATTRS	Do not export level attributes. Ignore level attributes such as memory/cache sizes or PU indexes. This is required if loading the synthetic description with hwloc < 1.10.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_ FLAG_V1	Export the memory hierarchy as expected in hwloc 1.x. Instead of attaching memory children to levels, export single NUMA node child as normal intermediate levels, when possible. This is required if loading the synthetic description with hwloc 1.x. However this may fail if some objects have multiple local NUMA nodes.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_↔ FLAG_IGNORE_MEMORY	Do not export memory information. Only export the actual hierarchy of normal CPU-side objects and ignore where memory is attached. This is useful for when the hierarchy of CPUs is what really matters, but it behaves as if there was a single machine-wide NUMA node.

23.26.3 Function Documentation

23.26.3.1 hwloc_topology_export_synthetic()

Export the topology as a synthetic string.

At most buflen characters will be written in buffer, including the terminating $\0$.

This exported string may be given back to hwloc_topology_set_synthetic().

flags is a OR'ed set of hwloc_topology_export_synthetic_flags_e.

Returns

The number of characters that were written, not including the terminating \0.

-1 if the topology could not be exported, for instance if it is not symmetric.

Note

I/O and Misc children are ignored, the synthetic string only describes normal children.

A 1024-byte buffer should be large enough for exporting topologies in the vast majority of cases.

23.27 Retrieve distances between objects

Data Structures

• struct hwloc_distances_s

Enumerations

- enum hwloc_distances_kind_e {
 HWLOC_DISTANCES_KIND_FROM_OS, HWLOC_DISTANCES_KIND_FROM_USER, HWLOC_DISTANCES_KIND_MEAN
 , HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH,
 HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES }
- enum hwloc_distances_transform_e { HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL , HWLOC_DISTANCES_TRANSFORM_HWLOC_DISTANCES_TRANSFORM_MERGE_SWITCH_PORTS , HWLOC_DISTANCES_TRANSFORM_TRANSITIVE_CL }

Functions

- int hwloc_distances_get (hwloc_topology_t topology, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_depth (hwloc_topology_t topology, int depth, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_name (hwloc_topology_t topology, const char *name, unsigned *nr, struct hwloc_distances_s **distances, unsigned long flags)
- const char * hwloc_distances_get_name (hwloc_topology_t topology, struct hwloc_distances_s *distances)
- void hwloc_distances_release (hwloc_topology_t topology, struct hwloc_distances_s *distances)
- int hwloc_distances_transform (hwloc_topology_t topology, struct hwloc_distances_s *distances, enum hwloc_distances_transform_e transform, void *transform_attr, unsigned long flags)

23.27.1 Detailed Description

23.27.2 Enumeration Type Documentation

23.27.2.1 hwloc distances kind e

```
enum hwloc_distances_kind_e
```

Kinds of distance matrices.

The kind attribute of struct hwloc_distances_s is a OR'ed set of kinds.

A kind of format HWLOC_DISTANCES_KIND_FROM_* specifies where the distance information comes from, if known.

A kind of format HWLOC_DISTANCES_KIND_MEANS_* specifies whether values are latencies or bandwidths, if applicable.

Enumerator

HWLOC_DISTANCES_KIND_FROM_OS	These distances were obtained from the operating system or hardware.
HWLOC_DISTANCES_KIND_FROM_USER	These distances were provided by the user.
HWLOC_DISTANCES_KIND_MEANS_LATENCY	Distance values are similar to latencies between objects. Values are smaller for closer objects, hence minimal on the diagonal of the matrix (distance between an object and itself). It could also be the number of network hops between objects, etc.

Enumerator

HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH	Distance values are similar to bandwidths between objects. Values are higher for closer objects, hence maximal on the diagonal of the matrix (distance between an object and itself). Such values are currently ignored for distance-based grouping.
HWLOC_DISTANCES_KIND_HETEROGENEOUS ← _ TYPES	This distances structure covers objects of different types. This may apply to the "NVLinkBandwidth" structure in presence of a NVSwitch or POWER processor NVLink port.

23.27.2.2 hwloc_distances_transform_e

enum hwloc_distances_transform_e

Transformations of distances structures.

Enumerator

HWLOC_DISTANCES_TRANSFORM_REMOVE_← NULL	Remove NULL objects from the distances structure. Every object that was replaced with NULL in the objs array is removed and the values array is updated accordingly. At least 2 objects must remain, otherwise hwloc_distances_transform() will return -1 with errno set to EINVAL. kind will be updated with or without HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES
HWLOC_DISTANCES_TRANSFORM_LINKS	according to the remaining objects. Replace bandwidth values with a number of links. Usually all values will be either 0 (no link) or 1 (one link). However some matrices could get larger values if some pairs of peers are connected by different numbers of links. Values on the diagonal are set to 0. This transformation only applies to bandwidth matrices.
HWLOC_DISTANCES_TRANSFORM_MERGE_← SWITCH_PORTS	Merge switches with multiple ports into a single object. This currently only applies to NVSwitches where GPUs seem connected to different separate switch ports in the NVLinkBandwidth matrix. This transformation will replace all of them with the same port connected to all GPUs. Other ports are removed by applying HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL internally.
HWLOC_DISTANCES_TRANSFORM_← TRANSITIVE_CLOSURE	Apply a transitive closure to the matrix to connect objects across switches. This currently only applies to GPUs and NVSwitches in the NVLinkBandwidth matrix. All pairs of GPUs will be reported as directly connected.

23.27.3 Function Documentation

23.27.3.1 hwloc_distances_get()

Retrieve distance matrices.

Retrieve distance matrices from the topology into the distances array.

flags is currently unused, should be 0.

kind serves as a filter. If 0, all distance matrices are returned. If it contains some HWLOC_DISTANCES_KIND
FROM*, only distance matrices whose kind matches one of these are returned. If it contains some HWLOC_
DISTANCES KIND MEANS *, only distance matrices whose kind matches one of these are returned.

On input, nr points to the number of distance matrices that may be stored in distances. On output, nr points to the number of distance matrices that were actually found, even if some of them couldn't be stored in distances. Distance matrices that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

Each distance matrix returned in the distances array should be released by the caller using hwloc_distances_release().

23.27.3.2 hwloc_distances_get_by_depth()

```
int hwloc_distances_get_by_depth (
    hwloc_topology_t topology,
    int depth,
    unsigned * nr,
    struct hwloc_distances_s ** distances,
    unsigned long kind,
    unsigned long flags )
```

Retrieve distance matrices for object at a specific depth in the topology. Identical to hwloc_distances_get() with the additional depth filter.

23.27.3.3 hwloc distances get by name()

```
int hwloc_distances_get_by_name (
    hwloc_topology_t topology,
    const char * name,
    unsigned * nr,
    struct hwloc_distances_s ** distances,
    unsigned long flags )
```

Retrieve a distance matrix with the given name.

Usually only one distances structure may match a given name.

The name of the most common structure is "NUMALatency". Others include "XGMIBandwidth" and "NVLink ← Bandwidth".

23.27.3.4 hwloc distances get by type()

Retrieve distance matrices for object of a specific type.

Identical to hwloc_distances_get() with the additional type filter.

23.27.3.5 hwloc_distances_get_name()

Get a description of what a distances structure contains.

For instance "NUMALatency" for hardware-provided NUMA distances (ACPI SLIT), or NULL if unknown.

23.27.3.6 hwloc distances release()

Release a distance matrix structure previously returned by hwloc_distances_get().

Note

This function is not required if the structure is removed with hwloc distances release remove().

23.27.3.7 hwloc distances transform()

```
int hwloc_distances_transform (
    hwloc_topology_t topology,
    struct hwloc_distances_s * distances,
    enum hwloc_distances_transform_e transform,
    void * transform_attr,
    unsigned long flags )
```

Apply a transformation to a distances structure.

Modify a distances structure that was previously obtained with hwloc_distances_get() or one of its variants.

This modifies the local copy of the distances structures but does not modify the distances information stored inside the topology (retrieved by another call to <a href="https://hww.nc.gover.nc

transform must be one of the transformations listed in hwloc_distances_transform_e.

These transformations may modify the contents of the objs or values arrays.

transform_attr must be NULL for now.

flags must be 0 for now.

Note

Objects in distances array objs may be directly modified in place without using hwloc_distances_transform(). One may use hwloc_get_obj_with_same_locality() to easily convert between similar objects of different types.

23.28 Helpers for consulting distance matrices

Functions

- static int hwloc_distances_obj_index (struct hwloc_distances_s *distances, hwloc_obj_t obj)
- static int hwloc_distances_obj_pair_values (struct hwloc_distances_s *distances, hwloc_obj_t obj1, hwloc_obj_t obj2, hwloc_uint64_t *value1to2, hwloc_uint64_t *value2to1)

23.28.1 Detailed Description

23.28.2 Function Documentation

23.28.2.1 hwloc_distances_obj_index()

Find the index of an object in a distances structure.

Returns

-1 if object obj is not involved in structure distances.

23.28.2.2 hwloc_distances_obj_pair_values()

Find the values between two objects in a distance matrices.

The distance from obj1 to obj2 is stored in the value pointed by value1to2 and reciprocally.

Returns

-1 if object obj1 or obj2 is not involved in structure distances.

23.29 Add distances between objects

Typedefs

• typedef void * hwloc_distances_add_handle_t

Enumerations

enum hwloc_distances_add_flag_e { HWLOC_DISTANCES_ADD_FLAG_GROUP , HWLOC_DISTANCES_ADD_FLAG_GROUP }

Functions

- hwloc_distances_add_handle_t hwloc_distances_add_create (hwloc_topology_t topology, const char *name, unsigned long kind, unsigned long flags)
- int hwloc_distances_add_values (hwloc_topology_t topology, hwloc_distances_add_handle_t handle, unsigned nbobjs, hwloc_obj_t *objs, hwloc_uint64_t *values, unsigned long flags)
- int hwloc_distances_add_commit (hwloc_topology_t topology, hwloc_distances_add_handle_t handle, unsigned long flags)

23.29.1 Detailed Description

```
The usual way to add distances is:
```

```
hwloc_distances_add_handle_t handle;
int err = -1;
handle = hwloc_distances_add_create(topology, "name", kind, 0);
if (handle) {
  err = hwloc_distances_add_values(topology, handle, nbobjs, objs, values, 0);
  if (!err)
    err = hwloc_distances_add_commit(topology, handle, flags);
}
```

If err is 0 at the end, then addition was successful.

23.29.2 Typedef Documentation

23.29.2.1 hwloc_distances_add_handle_t

```
typedef void* hwloc_distances_add_handle_t
```

Handle to a new distances structure during its addition to the topology.

23.29.3 Enumeration Type Documentation

23.29.3.1 hwloc_distances_add_flag_e

```
enum hwloc_distances_add_flag_e
```

Flags for adding a new distances to a topology.

Enumerator

HWLOC_DISTANCES_ADD_FLAG_GROUP	Try to group objects based on the newly provided distance information. This is ignored for distances between objects of different types.
HWLOC_DISTANCES_ADD_FLAG_GROUP_↔ INACCURATE	If grouping, consider the distance values as inaccurate and relax the comparisons during the grouping algorithms. The actual accuracy may be modified through the HWLOC_GROUPING_ACCURACY environment variable (see Environment Variables).

23.29.4 Function Documentation

23.29.4.1 hwloc_distances_add_commit()

Commit a new distances structure.

This function finalizes the distances structure and inserts in it the topology.

Parameter handle was previously returned by hwloc_distances_add_create(). Then objects and values were specified with hwloc_distances_add_values().

flags configures the behavior of the function using an optional OR'ed set of hwloc_distances_add_flag_e. It may be used to request the grouping of existing objects based on distances.

On error, the temporary distances structure and its content are destroyed.

Returns

```
0 on success.
```

-1 on error.

23.29.4.2 hwloc_distances_add_create()

```
hwloc_distances_add_handle_t hwloc_distances_add_create (
    hwloc_topology_t topology,
    const char * name,
    unsigned long kind,
    unsigned long flags )
```

Create a new empty distances structure.

Create an empty distances structure to be filled with hwloc_distances_add_values() and then committed with hwloc distances add commit().

Parameter name is optional, it may be NULL. Otherwise, it will be copied internally and may later be freed by the caller

kind specifies the kind of distance as a OR'ed set of hwloc_distances_kind_e. Kind HWLOC_DISTANCES_KIND_HETEROGENEOU will be automatically set according to objects having different types in hwloc_distances_add_values(). flags must be 0 for now.

Returns

A hwloc_distances_add_handle_t that should then be passed to hwloc_distances_add_values() and hwloc_distances_add_commit().

NULL on error.

23.29.4.3 hwloc_distances_add_values()

```
int hwloc_distances_add_values (
    hwloc_topology_t topology,
    hwloc_distances_add_handle_t handle,
    unsigned nbobjs,
    hwloc_obj_t * objs,
    hwloc_uint64_t * values,
    unsigned long flags )
```

Specify the objects and values in a new empty distances structure.

Specify the objects and values for a new distances structure that was returned as a handle by hwwloc_distances_add_create().

The number of objects is nbobjs and the array of objects is objs. Distance values are stored as a one-dimension array in values. The distance from object i to object j is in slot i*nbobjs+j.

nbobjs must be at least 2.

Arrays objs and values will be copied internally, they may later be freed by the caller.

On error, the temporary distances structure and its content are destroyed.

flags must be 0 for now.

Returns

0 on success.

-1 on error.

23.30 Remove distances between objects

Functions

- int hwloc_distances_remove (hwloc_topology_t topology)
- int hwloc_distances_remove_by_depth (hwloc_topology_t topology, int depth)
- static int hwloc_distances_remove_by_type (hwloc_topology_t topology, hwloc_obj_type_t type)
- int hwloc_distances_release_remove (hwloc_topology_t topology, struct hwloc_distances_s *distances)

23.30.1 Detailed Description

23.30.2 Function Documentation

23.30.2.1 hwloc_distances_release_remove()

Release and remove the given distance matrice from the topology.

This function includes a call to hwloc distances release().

23.30.2.2 hwloc_distances_remove()

Remove all distance matrices from a topology.

Remove all distance matrices, either provided by the user or gathered through the OS.

If these distances were used to group objects, these additional Group objects are not removed from the topology.

23.30.2.3 hwloc_distances_remove_by_depth()

```
int hwloc_distances_remove_by_depth (
          hwloc_topology_t topology,
          int depth )
```

Remove distance matrices for objects at a specific depth in the topology.

Identical to hwloc distances remove() but only applies to one level of the topology.

23.30.2.4 hwloc_distances_remove_by_type()

Remove distance matrices for objects of a specific type in the topology.

23.31 Comparing memory node attributes for finding where to allocate on

Data Structures

· struct hwloc location

Typedefs

typedef unsigned hwloc_memattr_id_t

Enumerations

- enum hwloc_memattr_id_e { HWLOC_MEMATTR_ID_CAPACITY = 0 , HWLOC_MEMATTR_ID_LOCALITY = 1 , HWLOC MEMATTR ID BANDWIDTH = 2 , HWLOC MEMATTR ID LATENCY = 3 }
- enum hwloc_location_type_e { HWLOC_LOCATION_TYPE_CPUSET , HWLOC_LOCATION_TYPE_OBJECT }
- enum hwloc_local_numanode_flag_e { HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY , HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY , HWLOC_LOCAL_NUMANODE_FLAG_ALL }

Functions

- int hwloc_memattr_get_by_name (hwloc_topology_t topology, const char *name, hwloc_memattr_id_t *id)
- int hwloc_get_local_numanode_objs (hwloc_topology_t topology, struct hwloc_location *location, unsigned *nr, hwloc_obj_t *nodes, unsigned long flags)
- int hwloc_memattr_get_value (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target_node, struct hwloc_location *initiator, unsigned long flags, hwloc_uint64_t *value)
- int hwloc_memattr_get_best_target (hwloc_topology_t topology, hwloc_memattr_id_t attribute, struct hwloc location *initiator, unsigned long flags, hwloc obj t *best target, hwloc uint64 t *value)

• int hwloc_memattr_get_best_initiator (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target, unsigned long flags, struct hwloc_location *best_initiator, hwloc_uint64_t *value)

23.31.1 Detailed Description

Platforms with heterogeneous memory require ways to decide whether a buffer should be allocated on "fast" memory (such as HBM), "normal" memory (DDR) or even "slow" but large-capacity memory (non-volatile memory). These memory nodes are called "Targets" while the CPU accessing them is called the "Initiator". Access performance depends on their locality (NUMA platforms) as well as the intrinsic performance of the targets (heterogeneous platforms).

The following attributes describe the performance of memory accesses from an Initiator to a memory Target, for instance their latency or bandwidth. Initiators performing these memory accesses are usually some PUs or Cores (described as a CPU set). Hence a Core may choose where to allocate a memory buffer by comparing the attributes of different target memory nodes nearby.

There are also some attributes that are system-wide. Their value does not depend on a specific initiator performing an access. The memory node Capacity is an example of such attribute without initiator.

One way to use this API is to start with a cpuset describing the Cores where a program is bound. The best target NUMA node for allocating memory in this program on these Cores may be obtained by passing this cpuset as an initiator to https://www.nematr_get_best_target() with the relevant memory attribute. For instance, if the code is latency limited, use the Latency attribute.

A more flexible approach consists in getting the list of local NUMA nodes by passing this cpuset to hwloc_get_local_numanode_objs(). Attribute values for these nodes, if any, may then be obtained with hwloc_memattr_get_value() and manually compared with the desired criteria.

Note

The API also supports specific objects as initiator, but it is currently not used internally by hwloc. Users may for instance use it to provide custom performance values for host memory accesses performed by GPUs.

The interface actually also accepts targets that are not NUMA nodes.

23.31.2 Typedef Documentation

23.31.2.1 hwloc_memattr_id_t

typedef unsigned hwloc_memattr_id_t

A memory attribute identifier. May be either one of hwloc_memattr_id_e or a new id returned by hwloc_memattr_register().

23.31.3 Enumeration Type Documentation

23.31.3.1 hwloc_local_numanode_flag_e

enum hwloc_local_numanode_flaq_e

Flags for selecting target NUMA nodes.

Enumerator

HWLOC_LOCAL_NUMANODE_FLAG_LARGER_← LOCALITY	Select NUMA nodes whose locality is larger than the given cpuset. For instance, if a single PU (or its cpuset) is given in initiator, select all nodes close to the package that contains this PU.
HWLOC_LOCAL_NUMANODE_FLAG_SMALLER↔ _LOCALITY	Select NUMA nodes whose locality is smaller than the given cpuset. For instance, if a package (or its cpuset) is given in initiator, also select nodes that are attached to only a half of that package.

Enumerator

HWLOC_LOCAL_NUMANODE_FLAG_ALL	Select all NUMA nodes in the topology. The initiator
	initiator is ignored .

23.31.3.2 hwloc_location_type_e

enum hwloc_location_type_e

Type of location.

Enumerator

HWLOC_LOCATION_TYPE_CPUSET	Location is given as a cpuset, in the location cpuset union field.
HWLOC_LOCATION_TYPE_OBJECT	Location is given as an object, in the location object union field.

23.31.3.3 hwloc_memattr_id_e

enum hwloc_memattr_id_e

Memory node attributes.

Enumerator

HWLOC_MEMATTR_ID_CAPACITY	"Capacity". The capacity is returned in bytes (local_memory attribute in objects). Best capacity nodes are nodes with higher capacity . No initiator is involved when looking at this attribute. The corresponding attribute flags are HWLOC_MEMATTR_FLAG_HIGHER_FIRST .
HWLOC_MEMATTR_ID_LOCALITY	"Locality". The locality is returned as the number of PUs in that locality (e.g. the weight of its cpuset). Best locality nodes are nodes with smaller locality (nodes that are local to very few PUs). Poor locality nodes are nodes with larger locality (nodes that are local to the entire machine). No initiator is involved when looking at this attribute. The corresponding attribute flags are HWLOC_MEMATTR_FLAG_HIGHER_FIRST.
HWLOC_MEMATTR_ID_BANDWIDTH	"Bandwidth". The bandwidth is returned in MiB/s, as seen from the given initiator location. Best bandwidth nodes are nodes with higher bandwidth . The corresponding attribute flags are HWLOC_MEMATTR_FLAG_HIGHER_FIRST and HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
HWLOC_MEMATTR_ID_LATENCY	"Latency". The latency is returned as nanoseconds, as seen from the given initiator location. Best latency nodes are nodes with smaller latency. The corresponding attribute flags are HWLOC_MEMATTR_FLAG_LOWER_FIRST and HWLOC_MEMATTR_FLAG_NEED_INITIATOR.

23.31.4 Function Documentation

23.31.4.1 hwloc_get_local_numanode_objs()

Return an array of local NUMA nodes.

By default only select the NUMA nodes whose locality is exactly the given location. More nodes may be selected if additional flags are given as a OR'ed set of hwloc_local_numanode_flag_e.

If location is given as an explicit object, its CPU set is used to find NUMA nodes with the corresponding locality. If the object does not have a CPU set (e.g. I/O object), the CPU parent (where the I/O object is attached) is used. On input, nr points to the number of nodes that may be stored in the nodes array. On output, nr will be changed to the number of stored nodes, or the number of nodes that would have been stored if there were enough room.

Note

Some of these NUMA nodes may not have any memory attribute values and hence not be reported as actual targets in other functions.

The number of NUMA nodes in the topology (obtained by hwloc_bitmap_weight() on the root object nodeset) may be used to allocate the nodes array.

When an object CPU set is given as locality, for instance a Package, and when flags contain both HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY and HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY the returned array corresponds to the nodeset of that object.

23.31.4.2 hwloc_memattr_get_best_initiator()

Return the best initiator for the given attribute and target NUMA node.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), -1 is returned and errno is set to EINVAL.

If value is non NULL, the corresponding value is returned there.

If multiple initiators have the same attribute values, only one is returned (and there is no way to clarify how that one is chosen). Applications that want to detect initiators with identical/similar values, or that want to look at values for multiple attributes, should rather get all values using https://www.nemattr_get_value() and manually select the initiator they consider the best.

The returned initiator should not be modified or freed, it belongs to the topology.

flags must be 0 for now.

If there are no matching initiators, -1 is returned with errno set to ENOENT;

23.31.4.3 hwloc_memattr_get_best_target()

Return the best target NUMA node for the given attribute and initiator.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

If value is non NULL, the corresponding value is returned there.

If multiple targets have the same attribute values, only one is returned (and there is no way to clarify how that one is chosen). Applications that want to detect targets with identical/similar values, or that want to look at values for multiple attributes, should rather get all values using https://www.nemattr_get_value() and manually select the target they consider the best.

flags must be 0 for now.

If there are no matching targets, -1 is returned with errno set to ENOENT;

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.31.4.4 hwloc_memattr_get_by_name()

Return the identifier of the memory attribute with the given name.

23.31.4.5 hwloc_memattr_get_value()

```
int hwloc_memattr_get_value (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    hwloc_obj_t target_node,
    struct hwloc_location * initiator,
    unsigned long flags,
    hwloc_uint64_t * value )
```

Return an attribute value for a specific target NUMA node.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

flags must be 0 for now.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.32 Managing memory attributes

Enumerations

enum hwloc_memattr_flag_e { HWLOC_MEMATTR_FLAG_HIGHER_FIRST = (1UL << 0) , HWLOC_MEMATTR_FLAG_LOWE
 = (1UL << 1) , HWLOC_MEMATTR_FLAG_NEED_INITIATOR = (1UL << 2) }

Functions

- int hwloc_memattr_get_name (hwloc_topology_t topology, hwloc_memattr_id_t attribute, const char **name)
- int hwloc_memattr_get_flags (hwloc_topology_t topology, hwloc_memattr_id_t attribute, unsigned long *flags)
- int hwloc_memattr_register (hwloc_topology_t topology, const char *name, unsigned long flags, hwloc_memattr_id_t *id)

- int hwloc_memattr_set_value (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target node, struct hwloc location *initiator, unsigned long flags, hwloc uint64 t value)
- int hwloc_memattr_get_targets (hwloc_topology_t topology, hwloc_memattr_id_t attribute, struct hwloc_location *initiator, unsigned long flags, unsigned *nrp, hwloc_obj_t *targets, hwloc_uint64_t *values)
- int hwloc_memattr_get_initiators (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target_node, unsigned long flags, unsigned *nr, struct hwloc_location *initiators, hwloc_uint64_t *values)

23.32.1 Detailed Description

23.32.2 Enumeration Type Documentation

23.32.2.1 hwloc memattr flag e

```
enum hwloc_memattr_flag_e
```

Memory attribute flags. Given to hwloc_memattr_register() and returned by hwloc_memattr_get_flags().

Enumerator

HWLOC_MEMATTR_FLAG_HIGHER_FIRST	The best nodes for this memory attribute are those with the higher values. For instance Bandwidth.
HWLOC_MEMATTR_FLAG_LOWER_FIRST	The best nodes for this memory attribute are those with the lower values. For instance Latency.
HWLOC_MEMATTR_FLAG_NEED_INITIATOR	The value returned for this memory attribute depends on the given initiator. For instance Bandwidth and Latency, but not Capacity.

23.32.3 Function Documentation

23.32.3.1 hwloc_memattr_get_flags()

Return the flags of the given attribute.

Flags are a OR'ed set of hwloc_memattr_flag_e.

23.32.3.2 hwloc memattr get initiators()

Return the initiators that have values for a given attribute for a specific target NUMA node.

Return initiators for the given attribute and target node in the initiators array. If values is not NULL, the corresponding attribute values are stored in the array it points to.

On input, nr points to the number of initiators that may be stored in the array initiators (and values). On output, nr points to the number of initiators (and values) that were actually found, even if some of them couldn't be

stored in the array. Initiators that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

The returned initiators should not be modified or freed, they belong to the topology.

flags must be 0 for now.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), no initiator is returned.

Note

This function is meant for tools and debugging (listing internal information) rather than for application queries. Applications should rather select useful NUMA nodes with https://www.numanode_objs() and then look at their attribute values for some relevant initiators.

23.32.3.3 hwloc_memattr_get_name()

```
int hwloc_memattr_get_name (
                hwloc_topology_t topology,
                 hwloc_memattr_id_t attribute,
                 const char ** name )
```

Return the name of a memory attribute.

23.32.3.4 hwloc memattr get targets()

```
int hwloc_memattr_get_targets (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    struct hwloc_location * initiator,
    unsigned long flags,
    unsigned * nrp,
    hwloc_obj_t * targets,
    hwloc_uint64_t * values )
```

Return the target NUMA nodes that have some values for a given attribute.

Return targets for the given attribute in the targets array (for the given initiator if any). If values is not NULL, the corresponding attribute values are stored in the array it points to.

On input, nr points to the number of targets that may be stored in the array targets (and values). On output, nr points to the number of targets (and values) that were actually found, even if some of them couldn't be stored in the array. Targets that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

The returned targets should not be modified or freed, they belong to the topology.

Argument initiator is ignored if the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR). Otherwise initiator may be non NULL to report only targets that have a value for that initiator.

flags must be 0 for now.

Note

This function is meant for tools and debugging (listing internal information) rather than for application queries. Applications should rather select useful NUMA nodes with hwloc_get_local_numanode_objs() and then look at their attribute values.

The initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.32.3.5 hwloc_memattr_register()

23.33 Kinds of CPU cores 167

```
const char * name,
unsigned long flags,
hwloc_memattr_id_t * id )
```

Register a new memory attribute.

Add a specific memory attribute that is not defined in hwloc_memattr_id_e. Flags are a OR'ed set of hwloc_memattr_flag_e. It must contain at least one of HWLOC_MEMATTR_FLAG_HIGHER_FIRST or HWLOC_MEMATTR_FLAG_LOWER_FIRST.

23.32.3.6 hwloc memattr set value()

```
int hwloc_memattr_set_value (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    hwloc_obj_t target_node,
    struct hwloc_location * initiator,
    unsigned long flags,
    hwloc_uint64_t value )
```

Set an attribute value for a specific target NUMA node.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

The initiator will be copied into the topology, the caller should free anything allocated to store the initiator, for instance the cpuset.

flags must be 0 for now.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.33 Kinds of CPU cores

Functions

- int hwloc cpukinds get nr (hwloc topology t topology, unsigned long flags)
- int hwloc_cpukinds_get_by_cpuset (hwloc_topology_t topology, hwloc_const_bitmap_t cpuset, unsigned long flags)
- int hwloc_cpukinds_get_info (hwloc_topology_t topology, unsigned kind_index, hwloc_bitmap_t cpuset, int *efficiency, unsigned *nr_infos, struct hwloc_info_s **infos, unsigned long flags)
- int hwloc_cpukinds_register (hwloc_topology_t topology, hwloc_bitmap_t cpuset, int forced_efficiency, unsigned nr_infos, struct hwloc_info_s *infos, unsigned long flags)

23.33.1 Detailed Description

Platforms with heterogeneous CPUs may have some cores with different features or frequencies. This API exposes identical PUs in sets called CPU kinds. Each PU of the topology may only be in a single kind.

The number of kinds may be obtained with hwloc_cpukinds_get_nr(). If the platform is homogeneous, there may be a single kind with all PUs. If the platform or operating system does not expose any information about CPU cores, there may be no kind at all.

The index of the kind that describes a given CPU set (if any, and not partially) may be obtained with hwloc_cpukinds_get_by_cpuset().

When available, efficiency values are gathered from the operating system (when <code>cpukind_efficiency</code> is set in the struct hwloc_topology_discovery_support array, only on Windows 10 for now). Otherwise hwloc tries to compute efficiencies by comparing CPU kinds using frequencies (on ARM), or core types and frequencies (on other

architectures). The environment variable HWLOC_CPUKINDS_RANKING may be used to change this heuristics, see Environment Variables.

If hwloc fails to rank any kind, for instance because the operating system does not expose efficiencies and core frequencies, all kinds will have an unknown efficiency (-1), and they are not indexed/ordered in any specific way.

23.33.2 Function Documentation

23.33.2.1 hwloc_cpukinds_get_by_cpuset()

Get the index of the CPU kind that contains CPUs listed in cpuset.

flags must be 0 for now.

Returns

The index of the CPU kind (positive integer or 0) on success.

- -1 with errno set to EXDEV if cpuset is only partially included in the some kind.
- -1 with errno set to ENOENT if cpuset is not included in any kind, even partially.
- -1 with errno set to EINVAL if parameters are invalid.

23.33.2.2 hwloc cpukinds get info()

Get the CPU set and infos about a CPU kind in the topology.

kind_index identifies one kind of CPU between 0 and the number of kinds returned by hwloc_cpukinds_get_nr() minus 1.

If not \mathtt{NULL} , the bitmap <code>cpuset</code> will be filled with the set of PUs of this kind.

The integer pointed by efficiency, if not NULL will, be filled with the ranking of this kind of CPU in term of efficiency (see above). It ranges from 0 to the number of kinds (as reported by hwloc_cpukinds_get_nr()) minus 1. Kinds with lower efficiency are reported first.

If there is a single kind in the topology, its efficiency 0. If the efficiency of some kinds of cores is unknown, the efficiency of all kinds is set to -1, and kinds are reported in no specific order.

The array of info attributes (for instance the "CoreType", "FrequencyMaxMHz" or "FrequencyBaseMHz", see CPU Kinds) and its length are returned in infos or nr_infos. The array belongs to the topology, it should not be freed or modified.

If $\ensuremath{\operatorname{nr_infos}}$ or $\ensuremath{\operatorname{infos}}$ is $\ensuremath{\operatorname{NULL}}$, no info is returned.

flags must be 0 for now.

Returns

0 on success.

- -1 with errno set to ENOENT if kind_index does not match any CPU kind.
- -1 with errno set to EINVAL if parameters are invalid.

23.33.2.3 hwloc_cpukinds_get_nr()

Get the number of different kinds of CPU cores in the topology.

flags must be 0 for now.

Returns

The number of CPU kinds (positive integer) on success.

0 if no information about kinds was found.

-1 with errno set to EINVAL if flags is invalid.

23.33.2.4 hwloc_cpukinds_register()

```
int hwloc_cpukinds_register (
    hwloc_topology_t topology,
    hwloc_bitmap_t cpuset,
    int forced_efficiency,
    unsigned nr_infos,
    struct hwloc_info_s * infos,
    unsigned long flags)
```

Register a kind of CPU in the topology.

Mark the PUs listed in cpuset as being of the same kind with respect to the given attributes.

forced_efficiency should be -1 if unknown. Otherwise it is an abstracted efficiency value to enforce the ranking of all kinds if all of them have valid (and different) efficiencies.

The array infos of size nr_infos may be used to provide info names and values describing this kind of PUs. flags must be 0 for now.

Parameters cpuset and infos will be duplicated internally, the caller is responsible for freeing them.

If cpuset overlaps with some existing kinds, those might get modified or split. For instance if existing kind A contains PUs 0 and 1, and one registers another kind for PU 1 and 2, there will be 3 resulting kinds: existing kind A is restricted to only PU 0; new kind B contains only PU 1 and combines information from A and from the newly-registered kind; new kind C contains only PU 2 and only gets information from the newly-registered kind.

Note

The efficiency forced_efficiency provided to this function may be different from the one reported later by hwloc_cpukinds_get_info() because hwloc will scale efficiency values down to between 0 and the number of kinds minus 1.

Returns

0 on success

-1 with errno set to EINVAL if some parameters are invalid, for instance if cpuset is NULL or empty.

23.34 Linux-specific helpers

Functions

- int hwloc_linux_set_tid_cpubind (hwloc_topology_t topology, pid_t tid, hwloc_const_cpuset_t set)
- int hwloc_linux_get_tid_cpubind (hwloc_topology_t topology, pid_t tid, hwloc_cpuset_t set)
- int hwloc_linux_get_tid_last_cpu_location (hwloc_topology_t topology, pid_t tid, hwloc_bitmap_t set)
- int hwloc_linux_read_path_as_cpumask (const char *path, hwloc_bitmap_t set)

23.34.1 Detailed Description

This includes helpers for manipulating Linux kernel cpumap files, and hwloc equivalents of the Linux sched_← setaffinity and sched_getaffinity system calls.

23.34.2 Function Documentation

23.34.2.1 hwloc_linux_get_tid_cpubind()

```
int hwloc_linux_get_tid_cpubind (
                hwloc_topology_t topology,
                 pid_t tid,
                 hwloc_cpuset_t set )
```

Get the current binding of thread tid.

The behavior is exactly the same as the Linux sched_getaffinity system call, but uses a hwloc cpuset.

Note

This is equivalent to calling hwloc_get_proc_cpubind() with HWLOC_CPUBIND_THREAD as flags.

23.34.2.2 hwloc_linux_get_tid_last_cpu_location()

Get the last physical CPU where thread tid ran.

Note

This is equivalent to calling hwloc get proc last cpu location() with HWLOC CPUBIND THREAD as flags.

23.34.2.3 hwloc_linux_read_path_as_cpumask()

Convert a linux kernel cpumask file path into a hwloc bitmap set.

Might be used when reading CPU set from sysfs attributes such as topology and caches for processors, or local ← _cpus for devices.

Note

This function ignores the HWLOC_FSROOT environment variable.

23.34.2.4 hwloc_linux_set_tid_cpubind()

Bind a thread tid on cpus given in cpuset set.

The behavior is exactly the same as the Linux sched_setaffinity system call, but uses a hwloc cpuset.

Note

This is equivalent to calling https://www.nuber.com/nuber.c

23.35 Interoperability with Linux libnuma unsigned long masks

Functions

- static int hwloc_cpuset_to_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_const_cpuset_t cpuset, unsigned long *mask, unsigned long *maxnode)
- static int hwloc_nodeset_to_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_const_nodeset_t nodeset, unsigned long *mask, unsigned long *maxnode)
- static int hwloc_cpuset_from_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_cpuset_t cpuset, const unsigned long *mask, unsigned long maxnode)
- static int hwloc_nodeset_from_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_nodeset_t nodeset, const unsigned long *mask, unsigned long maxnode)

23.35.1 Detailed Description

This interface helps converting between Linux libnuma unsigned long masks and hwloc cpusets and nodesets.

Note

Topology topology must match the current machine.

The behavior of libnuma is undefined if the kernel is not NUMA-aware. (when CONFIG_NUMA is not set in the kernel configuration). This helper and libnuma may thus not be strictly compatible in this case, which may be detected by checking whether numa_available() returns -1.

23.35.2 Function Documentation

23.35.2.1 hwloc_cpuset_from_linux_libnuma_ulongs()

Convert the array of unsigned long mask into hwloc CPU set.

mask is a array of unsigned long that will be read. maxnode contains the maximal node number that may be read in mask

This function may be used after calling get_mempolicy or any other function that takes an array of unsigned long as output parameter (and possibly a maximal node number as input parameter).

23.35.2.2 hwloc_cpuset_to_linux_libnuma_ulongs()

Convert hwloc CPU set cpuset into the array of unsigned long mask.

mask is the array of unsigned long that will be filled. maxnode contains the maximal node number that may be stored in mask. maxnode will be set to the maximal node number that was found, plus one.

This function may be used before calling set_mempolicy, mbind, migrate_pages or any other function that takes an array of unsigned long and a maximal node number as input parameter.

23.35.2.3 hwloc_nodeset_from_linux_libnuma_ulongs()

```
const unsigned long * mask,
unsigned long maxnode ) [inline], [static]
```

Convert the array of unsigned long mask into hwloc NUMA node set.

 ${\tt mask}$ is a array of unsigned long that will be read. ${\tt maxnode}$ contains the maximal node number that may be read in ${\tt mask}$.

This function may be used after calling get_mempolicy or any other function that takes an array of unsigned long as output parameter (and possibly a maximal node number as input parameter).

23.35.2.4 hwloc nodeset to linux libnuma ulongs()

Convert hwloc NUMA node set nodeset into the array of unsigned long mask.

mask is the array of unsigned long that will be filled. maxnode contains the maximal node number that may be stored in mask. maxnode will be set to the maximal node number that was found, plus one.

This function may be used before calling set_mempolicy, mbind, migrate_pages or any other function that takes an array of unsigned long and a maximal node number as input parameter.

23.36 Interoperability with Linux libnuma bitmask

Functions

- static struct bitmask * hwloc_cpuset_to_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_const_cpuset_t cpuset)
- static struct bitmask * hwloc_nodeset_to_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_const_nodeset_t nodeset)
- static int hwloc_cpuset_from_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_cpuset_t cpuset, const struct bitmask *bitmask)
- static int hwloc_nodeset_from_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_nodeset_t nodeset, const struct bitmask *bitmask)

23.36.1 Detailed Description

This interface helps converting between Linux libnuma bitmasks and hwloc cpusets and nodesets.

Note

Topology topology must match the current machine.

The behavior of libnuma is undefined if the kernel is not NUMA-aware. (when CONFIG_NUMA is not set in the kernel configuration). This helper and libnuma may thus not be strictly compatible in this case, which may be detected by checking whether numa_available() returns -1.

23.36.2 Function Documentation

23.36.2.1 hwloc cpuset from linux libnuma bitmask()

Convert libnuma bitmask bitmask into hwloc CPU set cpuset.

This function may be used after calling many numa_ functions that use a struct bitmask as an output parameter.

23.36.2.2 hwloc_cpuset_to_linux_libnuma_bitmask()

Convert hwloc CPU set cpuset into the returned libnuma bitmask.

The returned bitmask should later be freed with numa_bitmask_free.

This function may be used before calling many numa_functions that use a struct bitmask as an input parameter.

Returns

newly allocated struct bitmask.

23.36.2.3 hwloc_nodeset_from_linux_libnuma_bitmask()

Convert libnuma bitmask bitmask into hwloc NUMA node set nodeset.

This function may be used after calling many numa_functions that use a struct bitmask as an output parameter.

23.36.2.4 hwloc nodeset to linux libnuma bitmask()

Convert hwloc NUMA node set nodeset into the returned libnuma bitmask.

The returned bitmask should later be freed with numa_bitmask_free.

This function may be used before calling many numa_functions that use a struct bitmask as an input parameter.

Returns

newly allocated struct bitmask.

23.37 Windows-specific helpers

Functions

- int hwloc windows get nr processor groups (hwloc topology t topology, unsigned long flags)
- int hwloc_windows_get_processor_group_cpuset (hwloc_topology_t topology, unsigned pg_index, hwloc_cpuset_t cpuset, unsigned long flags)

23.37.1 Detailed Description

These functions query Windows processor groups. These groups partition the operating system into virtual sets of up to 64 neighbor PUs. Threads and processes may only be bound inside a single group. Although Windows processor groups may be exposed in the hwloc hierarchy as hwloc Groups, they are also often merged into existing hwloc objects such as NUMA nodes or Packages. This API provides explicit information about Windows processor groups so that applications know whether binding to a large set of PUs may fail because it spans over multiple Windows processor groups.

23.37.2 Function Documentation

23.37.2.1 hwloc_windows_get_nr_processor_groups()

Get the number of Windows processor groups.

flags must be 0 for now.

Returns

at least 1 on success.

-1 on error, for instance if the topology does not match the current system (e.g. loaded from another machine through XML).

23.37.2.2 hwloc windows get processor group cpuset()

Get the CPU-set of a Windows processor group.

Get the set of PU included in the processor group specified by pg_index . pg_index must be between 0 and the value returned by hwloc_windows_get_nr_processor_groups() minus 1.

flags must be 0 for now.

Returns

0 on success.

-1 on error, for instance if pg_index is invalid, or if the topology does not match the current system (e.g. loaded from another machine through XML).

23.38 Interoperability with glibc sched affinity

Functions

- static int hwloc_cpuset_to_glibc_sched_affinity (hwloc_topology_t topology, hwloc_const_cpuset_t hwlocset, cpu set t *schedset, size t schedsetsize)
- static int hwloc_cpuset_from_glibc_sched_affinity (hwloc_topology_t topology, hwloc_cpuset_t hwlocset, const cpu_set_t *schedset, size_t schedsetsize)

23.38.1 Detailed Description

This interface offers ways to convert between hwloc cpusets and glibc cpusets such as those manipulated by sched_getaffinity() or pthread_attr_setaffinity_np().

Note

Topology topology must match the current machine.

23.38.2 Function Documentation

23.38.2.1 hwloc_cpuset_from_glibc_sched_affinity()

```
const cpu_set_t * schedset,
size_t schedsetsize ) [inline], [static]
```

Convert glibc sched affinity CPU set schedset into hwloc CPU set.

This function may be used before calling sched_setaffinity or any other function that takes a cpu_set_t as input parameter.

schedsetsize should be sizeof(cpu set t) unless schedset was dynamically allocated with CPU ALLOC

23.38.2.2 hwloc_cpuset_to_glibc_sched_affinity()

Convert hwloc CPU set toposet into glibc sched affinity CPU set schedset.

This function may be used before calling sched_setaffinity or any other function that takes a cpu_set_t as input parameter.

schedsetsize should be sizeof(cpu_set_t) unless schedset was dynamically allocated with CPU_ALLOC

23.39 Interoperability with OpenCL

Functions

- static int hwloc_opencl_get_device_pci_busid (cl_device_id device, unsigned *domain, unsigned *bus, unsigned *dev, unsigned *func)
- static int hwloc_opencl_get_device_cpuset (hwloc_topology_t topology, cl_device_id device, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_opencl_get_device_osdev_by_index (hwloc_topology_t topology, unsigned platform_index, unsigned device_index)
- static hwloc obj t hwloc opencl get device osdev (hwloc topology t topology, cl device id device)

23.39.1 Detailed Description

This interface offers ways to retrieve topology information about OpenCL devices.

Only AMD and NVIDIA OpenCL implementations currently offer useful locality information about their devices.

23.39.2 Function Documentation

23.39.2.1 hwloc_opencl_get_device_cpuset()

Get the CPU set of processors that are physically close to OpenCL device device.

Store in set the CPU-set describing the locality of the OpenCL device device .

Topology topology and device device must match the local machine. I/O devices detection and the OpenCL component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_opencl_get_device_osdev() and hwloc_opencl_get_device_osdev().

This function is currently only implemented in a meaningful way for Linux with the AMD or NVIDIA OpenCL implementation; other systems will simply get a full cpuset.

23.39.2.2 hwloc_opencl_get_device_osdev()

Get the hwloc OS device object corresponding to OpenCL device deviceX.

Returns

The hwloc OS device object corresponding to the given OpenCL device device.

NULL if none could be found, for instance if required OpenCL attributes are not available.

This function currently only works on AMD and NVIDIA OpenCL devices that support relevant OpenCL extensions. hwloc_opencl_get_device_osdev_by_index() should be preferred whenever possible, i.e. when platform and device index are known.

Topology topology and device device must match the local machine. I/O devices detection and the Open ← CL component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_opencl_get_device_cpuset().

Note

This function cannot work if PCI devices are filtered out.

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.39.2.3 hwloc opencl get device osdev by index()

Get the hwloc OS device object corresponding to the OpenCL device for the given indexes.

Returns

The hwloc OS device object describing the OpenCL device whose platform index is $platform_index$, and whose device index within this platform if $device_index$.

NULL if there is none.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the OpenCL component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.39.2.4 hwloc_opencl_get_device_pci_busid()

Return the domain, bus and device IDs of the OpenCL device device.

Device device must match the local machine.

23.40 Interoperability with the CUDA Driver API

Functions

- static int hwloc_cuda_get_device_pci_ids (hwloc_topology_t topology, CUdevice cudevice, int *domain, int *bus, int *dev)
- static int hwloc_cuda_get_device_cpuset (hwloc_topology_t topology, CUdevice cudevice, hwloc_cpuset_t set)
- static hwloc obj t hwloc cuda get device pcidev (hwloc topology t topology, CUdevice cudevice)
- static hwloc_obj_t hwloc_cuda_get_device_osdev (hwloc_topology_t topology, CUdevice cudevice)
- static hwloc_obj_t hwloc_cuda_get_device_osdev_by_index (hwloc_topology_t topology, unsigned idx)

23.40.1 Detailed Description

This interface offers ways to retrieve topology information about CUDA devices when using the CUDA Driver API.

23.40.2 Function Documentation

23.40.2.1 hwloc_cuda_get_device_cpuset()

Get the CPU set of processors that are physically close to device cudevice.

Store in set the CPU-set describing the locality of the CUDA device cudevice.

Topology topology and device cudevice must match the local machine. I/O devices detection and the CUDA component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_cuda_get_device_osdev, and hwloc_cuda_get_device_osdev, by index().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.40.2.2 hwloc cuda get device osdev()

Get the hwloc OS device object corresponding to CUDA device cudevice.

Returns

The hwloc OS device object that describes the given CUDA device cudevice.

NULL if none could be found.

Topology topology and device cudevice must match the local machine. I/O devices detection and the CUDA component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_cuda_get_device_cpuset().

Note

This function cannot work if PCI devices are filtered out.

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.40.2.3 hwloc_cuda_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the CUDA device whose index is idx.

Returns

The hwloc OS device object describing the CUDA device whose index is idx.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the CUDA component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

This function is identical to hwloc_cudart_get_device_osdev_by_index().

23.40.2.4 hwloc_cuda_get_device_pci_ids()

Return the domain, bus and device IDs of the CUDA device cudevice.

Device cudevice must match the local machine.

23.40.2.5 hwloc_cuda_get_device_pcidev()

Get the hwloc PCI device object corresponding to the CUDA device ${\tt cudevice}.$

Returns

The hwloc PCI device object describing the CUDA device cudevice.

NULL if none could be found.

Topology topology and device cudevice must match the local machine. I/O devices detection must be enabled in topology topology. The CUDA component is not needed in the topology.

23.41 Interoperability with the CUDA Runtime API

Functions

- static int hwloc_cudart_get_device_pci_ids (hwloc_topology_t topology, int idx, int *domain, int *bus, int *dev)
- static int hwloc_cudart_get_device_cpuset (hwloc_topology_t topology, int idx, hwloc_cpuset_t set)
- static hwloc obj t hwloc cudart get device pcidev (hwloc topology t topology, int idx)
- static hwloc_obj_t hwloc_cudart_get_device_osdev_by_index (hwloc_topology_t topology, unsigned idx)

23.41.1 Detailed Description

This interface offers ways to retrieve topology information about CUDA devices when using the CUDA Runtime API.

23.41.2 Function Documentation

23.41.2.1 hwloc_cudart_get_device_cpuset()

Get the CPU set of processors that are physically close to device idx.

Store in set the CPU-set describing the locality of the CUDA device whose index is idx.

Topology topology and device idx must match the local machine. I/O devices detection and the CUDA component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see <a href="https://hww.needed.com/hww.needed.co

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.41.2.2 hwloc cudart get device osdev by index()

Get the hwloc OS device object corresponding to the CUDA device whose index is idx.

Returns

The hwloc OS device object describing the CUDA device whose index is idx.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the CUDA component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_cudart_get_device_cpuset().

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

This function is identical to hwloc cuda get device osdev by index().

23.41.2.3 hwloc_cudart_get_device_pci_ids()

```
static int hwloc_cudart_get_device_pci_ids (
    hwloc_topology_t topology,
    int idx,
    int * domain,
    int * bus,
    int * dev ) [inline], [static]
```

Return the domain, bus and device IDs of the CUDA device whose index is idx.

Device index ${\tt idx}$ must match the local machine.

23.41.2.4 hwloc_cudart_get_device_pcidev()

Get the hwloc PCI device object corresponding to the CUDA device whose index is \mathtt{idx} .

Returns

The hwloc PCI device object describing the CUDA device whose index is idx.

NULL if none could be found.

Topology topology and device idx must match the local machine. I/O devices detection must be enabled in topology topology. The CUDA component is not needed in the topology.

23.42 Interoperability with the NVIDIA Management Library

Functions

- static int hwloc_nvml_get_device_cpuset (hwloc_topology_t topology, nvmlDevice_t device, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_nvml_get_device_osdev_by_index (hwloc_topology_t topology, unsigned idx)
- static hwloc obj t hwloc nvml get device osdev (hwloc topology, t topology, nvmlDevice t device)

23.42.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the NVIDIA Management Library (NVML).

23.42.2 Function Documentation

23.42.2.1 hwloc nvml get device cpuset()

Get the CPU set of processors that are physically close to NVML device device.

Store in set the CPU-set describing the locality of the NVML device device.

Topology topology and device device must match the local machine. I/O devices detection and the NVML component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc nvml get device osdev() and hwloc nvml get device osdev by index().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.42.2.2 hwloc_nvml_get_device_osdev()

Get the hwloc OS device object corresponding to NVML device ${\tt device}.$

Returns

The hwloc OS device object that describes the given NVML device device.

NULL if none could be found.

Topology topology and device device must match the local machine. I/O devices detection and the NVML component must be enabled in the topology. If not, the locality of the object may still be found using $hwloc_nvml_get_device_cpuset()$.

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.42.2.3 hwloc_nvml_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the NVML device whose index is idx.

Returns

The hwloc OS device object describing the NVML device whose index is idx.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the NVML component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.43 Interoperability with the ROCm SMI Management Library

Functions

- static int hwloc_rsmi_get_device_cpuset (hwloc_topology_t topology, uint32_t dv_ind, hwloc_cpuset_t set)
- static hwloc obj t hwloc rsmi get device osdev by index (hwloc topology t topology, uint32 t dv ind)
- static hwloc_obj_t hwloc_rsmi_get_device_osdev (hwloc_topology_t topology, uint32_t dv_ind)

23.43.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the ROCm SMI Management Library.

23.43.2 Function Documentation

23.43.2.1 hwloc rsmi get device cpuset()

Get the CPU set of logical processors that are physically close to AMD GPU device whose index is dv_ind .

Store in set the CPU-set describing the locality of the AMD GPU device whose index is dv_ind.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the ROCm SMI component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_rsmi_get_device_osdev() and hwloc_rsmi_get_device_osdev().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.43.2.2 hwloc rsmi get device osdev()

Get the hwloc OS device object corresponding to AMD GPU device, whose index is dv_ind.

Returns

The hwloc OS device object that describes the given AMD GPU, whose index is dv_ind.

NULL if none could be found.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the ROCm SMI component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_rsmi_get_device_cpuset().

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.43.2.3 hwloc rsmi get device osdev by index()

Get the hwloc OS device object corresponding to the AMD GPU device whose index is dv_ind .

Returns

The hwloc OS device object describing the AMD GPU device whose index is dv_ind.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the ROCm SMI component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.44 Interoperability with the oneAPI Level Zero interface.

Functions

- static int hwloc_levelzero_get_device_cpuset (hwloc_topology_t topology, ze_device_handle_t device, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_levelzero_get_device_osdev (hwloc_topology_t topology, ze_device_handle_t device)

23.44.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the Level Zero API.

23.44.2 Function Documentation

23.44.2.1 hwloc_levelzero_get_device_cpuset()

Get the CPU set of logical processors that are physically close to the Level Zero device device. Store in set the CPU-set describing the locality of the Level Zero device device.

Topology topology and device device must match the local machine. The Level Zero must have been initialized with Sysman enabled (ZES_ENABLE_SYSMAN=1 in the environment). I/O devices detection and the Level Zero component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_levelzero_get_device_osdev().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.44.2.2 hwloc levelzero get device osdev()

Get the hwloc OS device object corresponding to Level Zero device device.

Returns

The hwloc OS device object that describes the given Level Zero device device.

NULL if none could be found.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the Level Zero component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_levelzero_get_device_cpuset().

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.45 Interoperability with OpenGL displays

Functions

- static hwloc_obj_t hwloc_gl_get_display_osdev_by_port_device (hwloc_topology_t topology, unsigned port, unsigned device)
- static hwloc_obj_t hwloc_gl_get_display_osdev_by_name (hwloc_topology_t topology, const char *name)
- static int hwloc_gl_get_display_by_osdev (hwloc_topology_t topology, hwloc_obj_t osdev, unsigned *port, unsigned *device)

23.45.1 Detailed Description

This interface offers ways to retrieve topology information about OpenGL displays.

Only the NVIDIA display locality information is currently available, using the NV-CONTROL X11 extension and the NVCtrl library.

23.45.2 Function Documentation

23.45.2.1 hwloc_gl_get_display_by_osdev()

Get the OpenGL display port and device corresponding to the given hwloc OS object.

Retrieves the OpenGL display port (server) in port and device (screen) in screen that correspond to the given hwloc OS device object.

Returns

-1 if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology.

23.45.2.2 hwloc_gl_get_display_osdev_by_name()

Get the hwloc OS device object corresponding to the OpenGL display given by name.

Returns

The hwloc OS device object describing the OpenGL display whose name is name, built as ":port.device" such as ":0.0".

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.45.2.3 hwloc_gl_get_display_osdev_by_port_device()

Get the hwloc OS device object corresponding to the OpenGL display given by port and device index.

Returns

The hwloc OS device object describing the OpenGL display whose port (server) is port and device (screen) is device.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology. Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.46 Interoperability with OpenFabrics

Functions

- static int hwloc_ibv_get_device_cpuset (hwloc_topology_t topology, struct ibv_device *ibdev, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_ibv_get_device_osdev_by_name (hwloc_topology_t topology, const char *ibname)
- static hwloc_obj_t hwloc_ibv_get_device_osdev (hwloc_topology_t topology, struct ibv_device *ibdev)

23.46.1 Detailed Description

This interface offers ways to retrieve topology information about OpenFabrics devices (InfiniBand, Omni-Path, us⇔ NIC, etc).

23.46.2 Function Documentation

23.46.2.1 hwloc_ibv_get_device_cpuset()

Get the CPU set of processors that are physically close to device ibdev.

Store in set the CPU-set describing the locality of the OpenFabrics device ibdev (InfiniBand, etc).

Topology topology and device ibdev must match the local machine. I/O devices detection is not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see https://www.needed.com/bw_get_device_osdev () and <a href="https://www.needed.com/bw_get_device_osdev () and <a href="https://www.needed.com/bw_

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

23.46.2.2 hwloc ibv get device osdev()

Get the hwloc OS device object corresponding to the OpenFabrics device ibdev.

Returns

The hwloc OS device object describing the OpenFabrics device ibdev (InfiniBand, etc).

NULL if none could be found.

Topology topology and device ibdev must match the local machine. I/O devices detection must be enabled in the topology. If not, the locality of the object may still be found using hwloc ibv get device cpuset().

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object.

23.46.2.3 hwloc_ibv_get_device_osdev_by_name()

Get the hwloc OS device object corresponding to the OpenFabrics device named ibname.

Returns

The hwloc OS device object describing the OpenFabrics device (InfiniBand, Omni-Path, usNIC, etc) whose name is ibname (mlx5_0, hfi1_0, usnic_0, qib0, etc).

 ${\tt NULL}$ if none could be found.

The name ibname is usually obtained from ibv_get_device_name().

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object.

23.47 Topology differences

Data Structures

- union hwloc_topology_diff_obj_attr_u
- · union hwloc topology diff u

Typedefs

- typedef enum hwloc_topology_diff_obj_attr_type_e hwloc_topology_diff_obj_attr_type_t
- typedef enum hwloc topology diff type e hwloc topology diff type t
- typedef union hwloc_topology_diff_u * hwloc_topology_diff_t

Enumerations

- enum hwloc_topology_diff_obj_attr_type_e { HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE , HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE , HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO }
- enum hwloc_topology_diff_type_e { HWLOC_TOPOLOGY_DIFF_OBJ_ATTR , HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX }
- enum hwloc_topology_diff_apply_flags_e { HWLOC_TOPOLOGY_DIFF_APPLY_REVERSE }

Functions

- int hwloc_topology_diff_build (hwloc_topology_t topology, hwloc_topology_t newtopology, unsigned long flags, hwloc topology diff t *diff)
- int hwloc_topology_diff_apply (hwloc_topology_t topology, hwloc_topology_diff_t diff, unsigned long flags)
- int hwloc_topology_diff_destroy (hwloc_topology_diff_t diff)
- int hwloc_topology_diff_load_xml (const char *xmlpath, hwloc_topology_diff_t *diff, char **refname)
- int hwloc topology diff export xml (hwloc topology diff t diff, const char *refname, const char *xmlpath)
- int hwloc_topology_diff_load_xmlbuffer (const char *xmlbuffer, int buflen, hwloc_topology_diff_t *diff, char **refname)
- int hwloc_topology_diff_export_xmlbuffer (hwloc_topology_diff_t diff, const char *refname, char **xmlbuffer, int *buflen)

23.47.1 Detailed Description

Applications that manipulate many similar topologies, for instance one for each node of a homogeneous cluster, may want to compress topologies to reduce the memory footprint.

This file offers a way to manipulate the difference between topologies and export/import it to/from XML. Compression may therefore be achieved by storing one topology entirely while the others are only described by their differences with the former. The actual topology can be reconstructed when actually needed by applying the precomputed difference to the reference topology.

This interface targets very similar nodes. Only very simple differences between topologies are actually supported, for instance a change in the memory size, the name of the object, or some info attribute. More complex differences such as adding or removing objects cannot be represented in the difference structures and therefore return errors. Differences between object sets or topology-wide allowed sets, cannot be represented either.

It means that there is no need to apply the difference when looking at the tree organization (how many levels, how many objects per level, what kind of objects, CPU and node sets, etc) and when binding to objects. However the difference must be applied when looking at object attributes such as the name, the memory size or info attributes.

23.47.2 Typedef Documentation

23.47.2.1 hwloc_topology_diff_obj_attr_type_t

typedef enum hwloc_topology_diff_obj_attr_type_e hwloc_topology_diff_obj_attr_type_t Type of one object attribute difference.

23.47.2.2 hwloc_topology_diff_t

 $typedef \ union \ hwloc_topology_diff_u \ * \ hwloc_topology_diff_t$

One element of a difference list between two topologies.

23.47.2.3 hwloc_topology_diff_type_t

 ${\tt typedef \ enum \ hwloc_topology_diff_type_e \ hwloc_topology_diff_type_t}$

Type of one element of a difference list.

23.47.3 Enumeration Type Documentation

23.47.3.1 hwloc_topology_diff_apply_flags_e

 $\verb"enum hwloc_topology_diff_apply_flags_e"$

Flags to be given to hwloc_topology_diff_apply().

Enumerator

23.47.3.2 hwloc_topology_diff_obj_attr_type_e

enum hwloc_topology_diff_obj_attr_type_e

Type of one object attribute difference.

Enumerator

HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE	The object local memory is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s (and the index field is ignored).
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_NAME	The object name is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s (and the name field is ignored).
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO	the value of an info attribute is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s.

23.47.3.3 hwloc_topology_diff_type_e

enum hwloc_topology_diff_type_e

Type of one element of a difference list.

Enumerator

HWLOC_TOPOLOGY_DIFF_OBJ_ATTR	An object attribute was changed. The union is a
	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s.
HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX	The difference is too complex, it cannot be represented. The
	difference below this object has not been checked.
	hwloc_topology_diff_build() will return 1. The union is a
	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s.

23.47.4 Function Documentation

23.47.4.1 hwloc_topology_diff_apply()

```
int hwloc_topology_diff_apply (
          hwloc_topology_t topology,
          hwloc_topology_diff_t diff,
          unsigned long flags )
```

Apply a topology diff to an existing topology.

flags is an OR'ed set of hwloc topology diff apply flags e.

The new topology is modified in place. hwloc_topology_dup() may be used to duplicate it before patching. If the difference cannot be applied entirely, all previous applied elements are unapplied before returning.

Returns

0 on success.

-N if applying the difference failed while trying to apply the N-th part of the difference. For instance -1 is returned if the very first difference element could not be applied.

23.47.4.2 hwloc topology diff build()

Compute the difference between 2 topologies.

The difference is stored as a list of hwloc_topology_diff_t entries starting at diff. It is computed by doing a depth-first traversal of both topology trees simultaneously.

If the difference between 2 objects is too complex to be represented (for instance if some objects have different types, or different numbers of children), a special diff entry of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX is queued. The computation of the diff does not continue below these objects. So each such diff entry means that the difference between two subtrees could not be computed.

Returns

0 if the difference can be represented properly.

0 with diff pointing to NULL if there is no difference between the topologies.

1 if the difference is too complex (see above). Some entries in the list will be of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLE

-1 on any other error.

Note

flags is currently not used. It should be 0.

The output diff has to be freed with hwloc_topology_diff_destroy().

The output diff can only be exported to XML or passed to hwloc_topology_diff_apply() if 0 was returned, i.e. if no entry of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX is listed.

The output diff may be modified by removing some entries from the list. The removed entries should be freed by passing them to to hwloc_topology_diff_destroy() (possible as another list).

23.47.4.3 hwloc_topology_diff_destroy()

```
int hwloc_topology_diff_destroy ( {\tt hwloc\_topology\_diff\_t~\textit{diff}~)}
```

Destroy a list of topology differences.

23.47.4.4 hwloc_topology_diff_export_xml()

```
int hwloc_topology_diff_export_xml (
          hwloc_topology_diff_t diff,
          const char * refname,
          const char * xmlpath )
```

Export a list of topology differences to a XML file.

If not NULL, refname defines an identifier string for the reference topology which was used as a base when computing this difference. This identifier is usually the name of the other XML file that contains the reference topology. This attribute is given back when reading the diff from XML.

23.47.4.5 hwloc topology diff export xmlbuffer()

Export a list of topology differences to a XML buffer.

If not NULL, refname defines an identifier string for the reference topology which was used as a base when computing this difference. This identifier is usually the name of the other XML file that contains the reference topology. This attribute is given back when reading the diff from XML.

The returned buffer ends with a \0 that is included in the returned length.

Note

The XML buffer should later be freed with hwloc_free_xmlbuffer().

23.47.4.6 hwloc_topology_diff_load_xml()

Load a list of topology differences from a XML file.

If not NULL, refname will be filled with the identifier string of the reference topology for the difference file, if any was specified in the XML file. This identifier is usually the name of the other XML file that contains the reference topology.

Note

the pointer returned in refname should later be freed by the caller.

23.47.4.7 hwloc_topology_diff_load_xmlbuffer()

Load a list of topology differences from a XML buffer.

If not <code>NULL</code>, <code>refname</code> will be filled with the identifier string of the reference topology for the difference file, if any was specified in the XML file. This identifier is usually the name of the other XML file that contains the reference topology.

Note

the pointer returned in refname should later be freed by the caller.

23.48 Sharing topologies between processes

Functions

- int hwloc_shmem_topology_get_length (hwloc_topology_t topology, size_t *lengthp, unsigned long flags)
- int hwloc_shmem_topology_write (hwloc_topology_t topology, int fd, hwloc_uint64_t fileoffset, void *mmap←
 _address, size_t length, unsigned long flags)
- int hwloc_shmem_topology_adopt (hwloc_topology_t *topologyp, int fd, hwloc_uint64_t fileoffset, void *mmap_address, size_t length, unsigned long flags)

23.48.1 Detailed Description

These functions are used to share a topology between processes by duplicating it into a file-backed shared-memory buffer.

The master process must first get the required shared-memory size for storing this topology with hwloc_shmem_topology_get_length() Then it must find a virtual memory area of that size that is available in all processes (identical virtual addresses in all processes). On Linux, this can be done by comparing holes found in /proc/<pid>/maps for each process.

Once found, it must open a destination file for storing the buffer, and pass it to hwloc_shmem_topology_write() together with virtual memory address and length obtained above.

Other processes may then adopt this shared topology by opening the same file and passing it to hwloc_shmem_topology_adopt() with the exact same virtual memory address and length.

23.48.2 Function Documentation

23.48.2.1 hwloc shmem topology adopt()

```
int hwloc_shmem_topology_adopt (
    hwloc_topology_t * topologyp,
    int fd,
    hwloc_uint64_t fileoffset,
    void * mmap_address,
    size_t length,
    unsigned long flags )
```

Adopt a shared memory topology stored in a file.

Map a file in virtual memory and adopt the topology that was previously stored there with hwloc_shmem_topology_write(). The returned adopted topology in topology can be used just like any topology. And it must be destroyed with hwloc_topology_destroy() as usual.

However the topology is read-only. For instance, it cannot be modified with hwloc_topology_restrict() and object userdata pointers cannot be changed.

The segment of the file pointed by descriptor fd, starting at offset fileoffset, and of length length (in bytes), will be mapped at virtual address $mmap_address$.

The file pointed by descriptor fd, the offset fileoffset, the requested mapping virtual address mmap_\circ
address and the length length must be identical to what was given to hwloc_shmem_topology_write() earlier.

Note

Flags flags are currently unused, must be 0.

The object userdata pointer should not be used unless the process that created the shared topology also placed userdata-pointed buffers in shared memory.

This function takes care of calling hwloc topology abi check().

Returns

- -1 with errno set to EBUSY if the virtual memory mapping defined by mmap_address and length isn't available in the process.
- -1 with errno set to EINVAL if fileoffset, mmap_address or length aren't page-aligned, or do not match what was given to hwloc_shmem_topology_write() earlier.
- -1 with errno set to EINVAL if the layout of the topology structure is different between the writer process and the adopter process.

23.48.2.2 hwloc_shmem_topology_get_length()

Get the required shared memory length for storing a topology.

This length (in bytes) must be used in hwloc_shmem_topology_write() and hwloc_shmem_topology_adopt() later.

Note

Flags flags are currently unused, must be 0.

23.48.2.3 hwloc_shmem_topology_write()

```
int hwloc_shmem_topology_write (
    hwloc_topology_t topology,
    int fd,
    hwloc_uint64_t fileoffset,
    void * mmap_address,
    size_t length,
    unsigned long flags )
```

Duplicate a topology to a shared memory file.

Temporarily map a file in virtual memory and duplicate the topology topology by allocating duplicates in there. The segment of the file pointed by descriptor fd, starting at offset fileoffset, and of length length (in bytes), will be temporarily mapped at virtual address mmap_address during the duplication.

The mapping length length must have been previously obtained with hwloc_shmem_topology_get_length() and the topology must not have been modified in the meantime.

Note

Flags flags are currently unused, must be 0.

The object userdata pointer is duplicated but the pointed buffer is not. However the caller may also allocate it manually in shared memory to share it as well.

Returns

- -1 with errno set to EBUSY if the virtual memory mapping defined by mmap_address and length isn't available in the process.
- -1 with errno set to EINVAL if fileoffset, mmap_address or length aren't page-aligned.

23.49 Components and Plugins: Discovery components

Data Structures

· struct hwloc disc component

192 Module Documentation

23.49.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.50 Components and Plugins: Discovery backends

Data Structures

- struct hwloc_disc_status
- · struct hwloc backend

Typedefs

• typedef enum hwloc_disc_phase_e hwloc_disc_phase_t

Enumerations

```
    enum hwloc_disc_phase_e {
        HWLOC_DISC_PHASE_GLOBAL , HWLOC_DISC_PHASE_CPU , HWLOC_DISC_PHASE_MEMORY ,
        HWLOC_DISC_PHASE_PCI ,
        HWLOC_DISC_PHASE_IO , HWLOC_DISC_PHASE_MISC , HWLOC_DISC_PHASE_ANNOTATE ,
        HWLOC_DISC_PHASE_TWEAK }
```

enum hwloc_disc_status_flag_e { HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_RESOURCES }

Functions

- struct hwloc_backend * hwloc_backend_alloc (struct hwloc_topology *topology, struct hwloc_disc_component *component)
- int hwloc_backend_enable (struct hwloc_backend *backend)

23.50.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.50.2 Typedef Documentation

```
23.50.2.1 hwloc_disc_phase_t
```

```
typedef enum hwloc_disc_phase_e hwloc_disc_phase_t Discovery phase.
```

23.50.3 Enumeration Type Documentation

23.50.3.1 hwloc disc phase e

```
enum hwloc_disc_phase_e
Discovery phase.
```

Enumerator

HWLOC_DISC_PHASE_GLOBAL	xml or synthetic, platform-specific components such as bgq. Discovers everything including CPU, memory, I/O and everything else. A component with a Global phase usually excludes all other phases.	
HWLOC_DISC_PHASE_CPU	CPU discovery.	
HWLOC_DISC_PHASE_MEMORY	Attach memory to existing CPU objects.	
HWLOC_DISC_PHASE_PCI	Attach PCI devices and bridges to existing CPU objects.	
HWLOC_DISC_PHASE_IO	I/O discovery that requires PCI devices (OS devices such as OpenCL, CUDA, etc.).	
HWLOC_DISC_PHASE_MISC	Misc objects that gets added below anything else.	
HWLOC_DISC_PHASE_ANNOTATE	Annotating existing objects, adding distances, etc.	
HWLOC_DISC_PHASE_TWEAK	Final tweaks to a ready-to-use topology. This phase runs once the topology is loaded, before it is returned to the topology. Hence it may only use the main hwloc API for modifying the topology, for instance by restricting it, adding info attributes, etc.	

23.50.3.2 hwloc_disc_status_flag_e

```
enum hwloc_disc_status_flag_e
Discovery status flags.
```

Enumerator

HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED↔	The sets of allowed resources were already retrieved.
_RESOURCES	

23.50.4 Function Documentation

23.50.4.1 hwloc_backend_alloc()

Allocate a backend structure, set good default values, initialize backend->component and topology, etc. The caller will then modify whatever needed, and call hwloc_backend_enable().

23.50.4.2 hwloc_backend_enable()

Enable a previously allocated and setup backend.

23.51 Components and Plugins: Generic components

Data Structures

· struct hwloc component

194 Module Documentation

Typedefs

• typedef enum hwloc_component_type_e hwloc_component_type_t

Enumerations

enum hwloc_component_type_e { HWLOC_COMPONENT_TYPE_DISC , HWLOC_COMPONENT_TYPE_XML }

23.51.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.51.2 Typedef Documentation

23.51.2.1 hwloc_component_type_t

typedef enum hwloc_component_type_e hwloc_component_type_t Generic component type.

23.51.3 Enumeration Type Documentation

23.51.3.1 hwloc_component_type_e

```
enum hwloc_component_type_e
Generic component type.
```

Enumerator

HWLOC_COMPONENT_TYPE_DISC	The data field must point to a struct hwloc_disc_component.
HWLOC_COMPONENT_TYPE_XML	The data field must point to a struct hwloc_xml_component.

23.52 Components and Plugins: Core functions to be used by components

Functions

- int hwloc_hide_errors (void)
- hwloc_obj_t hwloc_insert_object_by_cpuset (struct hwloc_topology *topology, hwloc_obj_t root, hwloc_obj_t obj, const char *reason)
- void hwloc_insert_object_by_parent (struct hwloc_topology *topology, hwloc_obj_t parent, hwloc_obj_t obj)
- hwloc_obj_t hwloc_alloc_setup_object (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned os_
 index)
- int hwloc_obj_add_children_sets (hwloc_obj_t obj)
- int hwloc_topology_reconnect (hwloc_topology_t topology, unsigned long flags)
- static int hwloc_plugin_check_namespace (const char *pluginname, const char *symbol)

23.52.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.52.2 Function Documentation

23.52.2.1 hwloc__insert_object_by_cpuset()

Add an object to the topology.

Insert new object obj in the topology starting under existing object root (if NULL, the topology root object is used).

It is sorted along the tree of other objects according to the inclusion of cpusets, to eventually be added as a child of the smallest object including this object.

If the cpuset is empty, the type of the object (and maybe some attributes) must be enough to find where to insert the object. This is especially true for NUMA nodes with memory and no CPUs.

The given object should not have children.

This shall only be called before levels are built.

The caller should check whether the object type is filtered-out before calling this function.

The topology cpuset/nodesets will be enlarged to include the object sets.

reason is a unique string identifying where and why this insertion call was performed (it will be displayed in case of internal insertion error).

Returns the object on success. Returns NULL and frees obj on error. Returns another object and frees obj if it was merged with an identical pre-existing object.

23.52.2.2 hwloc_alloc_setup_object()

Allocate and initialize an object of the given type and physical index.

If os_index is unknown or irrelevant, use HWLOC_UNKNOWN_INDEX.

23.52.2.3 hwloc hide errors()

Check whether error messages are hidden.

Callers should print critical error messages (e.g. invalid hw topo info, invalid config) only if this function returns strictly less than 2.

Callers should print non-critical error messages (e.g. failure to initialize CUDA) if this function returns 0.

This function return 1 by default (show critical only), 0 in Istopo (show all), or anything set in HWLOC_HIDE_← ERRORS in the environment.

23.52.2.4 hwloc_insert_object_by_parent()

Insert an object somewhere in the topology.

It is added as the last child of the given parent. The cpuset is completely ignored, so strange objects such as I/O devices should preferably be inserted with this.

196 Module Documentation

When used for "normal" children with cpusets (when importing from XML when duplicating a topology), the caller should make sure that:

- · children are inserted in order,
- · children cpusets do not intersect.

The given object may have normal, I/O or Misc children, as long as they are in order as well. These children must have valid parent and next sibling pointers.

The caller should check whether the object type is filtered-out before calling this function.

23.52.2.5 hwloc_obj_add_children_sets()

```
int hwloc_obj_add_children_sets (
          hwloc_obj_t obj )
```

Setup object cpusets/nodesets by OR'ing its children.

Used when adding an object late in the topology. Will update the new object by OR'ing all its new children sets. Used when PCI backend adds a hostbridge parent, when distances add a new Group, etc.

23.52.2.6 hwloc_plugin_check_namespace()

Make sure that plugins can lookup core symbols.

This is a sanity check to avoid lazy-lookup failures when libhwloc is loaded within a plugin, and later tries to load its own plugins. This may fail (and abort the program) if libhwloc symbols are in a private namespace.

Returns

0 on success.

-1 if the plugin cannot be successfully loaded. The caller plugin init() callback should return a negative error code as well.

Plugins should call this function in their init() callback to avoid later crashes if lazy symbol resolution is used by the upper layer that loaded hwloc (e.g. OpenCL implementations using dlopen with RTLD_LAZY).

Note

The build system must define HWLOC_INSIDE_PLUGIN if and only if building the caller as a plugin.

This function should remain inline so plugins can call it even when they cannot find libhwloc symbols.

23.52.2.7 hwloc_topology_reconnect()

Request a reconnection of children and levels in the topology.

May be used by backends during discovery if they need arrays or lists of object within levels or children to be fully connected.

flags is currently unused, must 0.

23.53 Components and Plugins: Filtering objects

Functions

- static int hwloc_filter_check_pcidev_subtype_important (unsigned classid)
- static int hwloc_filter_check_osdev_subtype_important (hwloc_obj_osdev_type_t subtype)
- static int hwloc filter check keep object type (hwloc topology t topology, hwloc obj type t type)
- static int hwloc_filter_check_keep_object (hwloc_topology_t topology, hwloc_obj_t obj)

23.53.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.53.2 Function Documentation

23.53.2.1 hwloc filter check keep object()

Check whether the given object should be filtered-out.

Returns

1 if the object type should be kept, 0 otherwise.

23.53.2.2 hwloc_filter_check_keep_object_type()

Check whether a non-I/O object type should be filtered-out.

Cannot be used for I/O objects.

Returns

1 if the object type should be kept, 0 otherwise.

23.53.2.3 hwloc_filter_check_osdev_subtype_important()

Check whether the given OS device subtype is important.

Returns

1 if important, 0 otherwise.

23.53.2.4 hwloc_filter_check_pcidev_subtype_important()

Check whether the given PCI device classid is important.

Returns

1 if important, 0 otherwise.

23.54 Components and Plugins: helpers for PCI discovery

Functions

unsigned hwloc_pcidisc_find_cap (const unsigned char *config, unsigned cap)

198 Module Documentation

- int hwloc_pcidisc_find_linkspeed (const unsigned char *config, unsigned offset, float *linkspeed)
- hwloc_obj_type_t hwloc_pcidisc_check_bridge_type (unsigned device_class, const unsigned char *config)
- int hwloc_pcidisc_find_bridge_buses (unsigned domain, unsigned bus, unsigned dev, unsigned func, unsigned *secondary busp, unsigned *subordinate busp, const unsigned char *config)
- void hwloc pcidisc tree insert by busid (struct hwloc obj **treep, struct hwloc obj *obj)
- int hwloc_pcidisc_tree_attach (struct hwloc_topology *topology, struct hwloc_obj *tree)

23.54.1 Detailed Description

Note

These structures and functions may change when HWLOC COMPONENT ABI is modified.

23.54.2 Function Documentation

23.54.2.1 hwloc pcidisc check bridge type()

Return the hwloc object type (PCI device or Bridge) for the given class and configuration space. This function requires 16 bytes of common configuration header at the beginning of config.

23.54.2.2 hwloc_pcidisc_find_bridge_buses()

```
int hwloc_pcidisc_find_bridge_buses (
    unsigned domain,
    unsigned bus,
    unsigned dev,
    unsigned func,
    unsigned * secondary_busp,
    unsigned * subordinate_busp,
    const unsigned char * config )
```

Fills the attributes of the given PCI bridge using the given PCI config space.

This function requires 32 bytes of common configuration header at the beginning of config.

Returns -1 and destroys /p obj if bridge fields are invalid.

23.54.2.3 hwloc_pcidisc_find_cap()

Return the offset of the given capability in the PCI config space buffer.

This function requires a 256-bytes config space. Unknown/unavailable bytes should be set to 0xff.

23.54.2.4 hwloc_pcidisc_find_linkspeed()

Fill linkspeed by reading the PCI config space where PCI CAP ID EXP is at position offset.

Needs 20 bytes of EXP capability block starting at offset in the config space for registers up to link status.

23.54.2.5 hwloc_pcidisc_tree_attach()

Add some hostbridges on top of the given tree of PCI objects and attach them to the topology. Other backends may lookup PCI objects or localities (for instance to attach OS devices) by using hwloc_pcidisc_cifind_by_busid() or hwloc_pcidisc_find_busid_parent().

23.54.2.6 hwloc_pcidisc_tree_insert_by_busid()

Insert a PCI object in the given PCI tree by looking at PCI bus IDs.

If treep points to NULL, the new object is inserted there.

23.55 Components and Plugins: finding PCI objects during other discoveries

Typedefs

typedef void * hwloc_backend_distances_add_handle_t

Functions

- struct hwloc_obj * hwloc_pci_find_parent_by_busid (struct hwloc_topology *topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- struct hwloc_obj * hwloc_pci_find_by_busid (struct hwloc_topology *topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- hwloc_backend_distances_add_handle_t hwloc_backend_distances_add_create (hwloc_topology_t topology, const char *name, unsigned long kind, unsigned long flags)
- int hwloc_backend_distances_add_values (hwloc_topology_t topology, hwloc_backend_distances_add_handle_t handle, unsigned nbobjs, hwloc_obj_t *objs, hwloc_uint64_t *values, unsigned long flags)
- int hwloc_backend_distances_add_commit (hwloc_topology_t topology, hwloc_backend_distances_add_handle_t handle, unsigned long flags)

23.55.1 Detailed Description

Note

These structures and functions may change when HWLOC COMPONENT ABI is modified.

23.55.2 Typedef Documentation

23.55.2.1 hwloc backend distances add handle t

```
typedef void* hwloc_backend_distances_add_handle_t
```

Handle to a new distances structure during its addition to the topology.

23.55.3 Function Documentation

200 Module Documentation

23.55.3.1 hwloc_backend_distances_add_commit()

Commit a new distances structure.

23.55.3.2 hwloc_backend_distances_add_create()

```
hwloc_backend_distances_add_handle_t hwloc_backend_distances_add_create (
    hwloc_topology_t topology,
    const char * name,
    unsigned long kind,
    unsigned long flags)
```

Create a new empty distances structure.

23.55.3.3 hwloc backend distances add values()

Specify the objects and values in a new empty distances structure.

This is similar to hwloc_distances_add_values() but this variant is designed for backend inserting distances during topology discovery.

The only semantical difference is that objs and values are not duplicated, but directly attached to the topology. On success, these arrays are given to the core and should not ever be freed by the caller anymore.

23.55.3.4 hwloc_pci_find_by_busid()

Find the PCI device or bridge matching a PCI bus ID exactly.

This is useful for adding specific information about some objects based on their PCI id. When it comes to attaching objects based on PCI locality, hwloc_pci_find_parent_by_busid() should be preferred.

23.55.3.5 hwloc pci find parent by busid()

Find the object or a parent of a PCI bus ID.

When attaching a new object (typically an OS device) whose locality is specified by PCI bus ID, this function returns the PCI object to use as a parent for attaching.

23.56 Netloc API 201

If the exact PCI device with this bus ID exists, it is returned. Otherwise (for instance if it was filtered out), the function returns another object with similar locality (for instance a parent bridge, or the local CPU Package).

23.56 Netloc API

Enumerations

```
    enum {
        NETLOC_SUCCESS = 0, NETLOC_ERROR = -1, NETLOC_ERROR_NOTDIR = -2, NETLOC_ERROR_NOENT
        = -3,
        NETLOC_ERROR_EMPTY = -4, NETLOC_ERROR_MULTIPLE = -5, NETLOC_ERROR_NOT_IMPL = -6,
        NETLOC_ERROR_EXISTS = -7,
        NETLOC_ERROR_NOT_FOUND = -8, NETLOC_ERROR_MAX = -9 }
```

23.56.1 Detailed Description

23.56.2 Enumeration Type Documentation

23.56.2.1 anonymous enum

anonymous enum

Return codes

En	um	era	tor

NETLOC_SUCCESS	Success	
NETLOC_ERROR	Error: General condition	
NETLOC_ERROR_NOTDIR	NETLOC_ERROR_NOTDIR	
NETLOC_ERROR_NOENT	Error: URI is invalid, no such entry	
NETLOC_ERROR_EMPTY	Error: No networks found	
NETLOC_ERROR_MULTIPLE	Error: Multiple matching networks found	
NETLOC_ERROR_NOT_IMPL	Error: Interface not implemented	
NETLOC_ERROR_EXISTS	Error: If the entry already exists when trying to add to a lookup table	
NETLOC_ERROR_NOT_FOUND	Error: No path found	
NETLOC_ERROR_MAX	Error: Enum upper bound marker. No errors less than this number Will not be returned externally.	

202 Module Documentation

Chapter 24

Data Structure Documentation

24.1 hwloc backend Struct Reference

#include <plugins.h>

Data Fields

- · unsigned phases
- · unsigned long flags
- · int is thissystem
- void * private data
- void(* disable)(struct hwloc_backend *backend)
- int(* discover)(struct hwloc_backend *backend, struct hwloc_disc_status *status)
- int(* get_pci_busid_cpuset)(struct hwloc_backend *backend, struct hwloc_pcidev_attr_s *busid, hwloc_bitmap_t cpuset)

24.1.1 Detailed Description

Discovery backend structure.

A backend is the instantiation of a discovery component. When a component gets enabled for a topology, its instantiate() callback creates a backend.

hwloc_backend_alloc() initializes all fields to default values that the component may change (except "component" and "next") before enabling the backend with hwloc backend enable().

Most backends assume that the topology is_thissystem flag is set because they talk to the underlying operating system. However they may still be used in topologies without the is_thissystem flag for debugging reasons. In practice, they are usually auto-disabled in such cases (excluded by xml or synthetic backends, or by environment variables when changing the Linux fsroot or the x86 cpuid path).

24.1.2 Field Documentation

24.1.2.1 disable

void(* hwloc_backend::disable) (struct hwloc_backend *backend)
Callback for freeing the private_data. May be NULL.

24.1.2.2 discover

int (* hwloc_backend::discover) (struct hwloc_backend *backend, struct hwloc_disc_status *status) Main discovery callback. returns -1 on error, either because it couldn't add its objects of the existing topology, or because of an actual discovery/gathering failure. May be NULL.

24.1.2.3 flags

```
unsigned long hwloc_backend::flags Backend flags, currently always 0.
```

24.1.2.4 get_pci_busid_cpuset

```
int(* hwloc_backend::get_pci_busid_cpuset) (struct hwloc_backend *backend, struct hwloc_←
pcidev_attr_s *busid, hwloc_bitmap_t cpuset)
```

Callback to retrieve the locality of a PCI object. Called by the PCI core when attaching PCI hierarchy to CPU objects. May be NULL.

24.1.2.5 is_thissystem

```
int hwloc_backend::is_thissystem
```

Backend-specific 'is_thissystem' property. Set to 0 if the backend disables the thissystem flag for this topology (e.g. loading from xml or synthetic string, or using a different fsroot on Linux, or a x86 CPUID dump). Set to -1 if the backend doesn't care (default).

24.1.2.6 phases

```
unsigned hwloc_backend::phases
```

Discovery phases performed by this component, possibly without some of them if excluded by other components. OR'ed set of hwloc_disc_phase_t.

24.1.2.7 private data

```
void* hwloc_backend::private_data
```

Backend private data, or NULL if none.

The documentation for this struct was generated from the following file:

· plugins.h

24.2 hwloc obj attr u::hwloc bridge attr s Struct Reference

```
#include <hwloc.h>
```

Data Fields

```
    union {
        struct hwloc_pcidev_attr_s pci
    } upstream
    hwloc_obj_bridge_type_t upstream_type
    union {
        struct {
            unsigned short domain
            unsigned char secondary_bus
            unsigned char subordinate_bus
        } pci
    } downstream
```

- hwloc_obj_bridge_type_t downstream_type
- · unsigned depth

24.2.1 Detailed Description

Bridge specific Object Attribues.

24.2.2 Field Documentation

24.2.2.1 depth

unsigned hwloc_obj_attr_u::hwloc_bridge_attr_s::depth

24.2.2.2 domain

unsigned short hwloc_obj_attr_u::hwloc_bridge_attr_s::domain

24.2.2.3

union { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::downstream

24.2.2.4 downstream_type

hwloc_obj_bridge_type_t hwloc_obj_attr_u::hwloc_bridge_attr_s::downstream_type

24.2.2.5 [1/2]

struct { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::pci

24.2.2.6 pci [2/2]

struct hwloc_pcidev_attr_s hwloc_obj_attr_u::hwloc_bridge_attr_s::pci

24.2.2.7 secondary_bus

 ${\tt unsigned \ char \ hwloc_obj_attr_u::hwloc_bridge_attr_s::secondary_bus}$

24.2.2.8 subordinate_bus

unsigned char hwloc_obj_attr_u::hwloc_bridge_attr_s::subordinate_bus

24.2.2.9

union { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::upstream

24.2.2.10 upstream type

hwloc_obj_bridge_type_t hwloc_obj_attr_u::hwloc_bridge_attr_s::upstream_type
The documentation for this struct was generated from the following file:

hwloc.h

24.3 hwloc_obj_attr_u::hwloc_cache_attr_s Struct Reference

#include <hwloc.h>

Data Fields

- hwloc uint64 t size
- · unsigned depth
- unsigned linesize
- · int associativity
- hwloc_obj_cache_type_t type

24.3.1 Detailed Description

Cache-specific Object Attributes.

24.3.2 Field Documentation

24.3.2.1 associativity

int hwloc_obj_attr_u::hwloc_cache_attr_s::associativity
Ways of associativity, -1 if fully associative, 0 if unknown.

24.3.2.2 depth

unsigned hwloc_obj_attr_u::hwloc_cache_attr_s::depth
Depth of cache (e.g., L1, L2, ...etc.)

24.3.2.3 linesize

unsigned hwloc_obj_attr_u::hwloc_cache_attr_s::linesize Cache-line size in bytes. 0 if unknown.

24.3.2.4 size

hwloc_uint64_t hwloc_obj_attr_u::hwloc_cache_attr_s::size Size of cache in bytes.

24.3.2.5 type

hwloc_obj_cache_type_t hwloc_obj_attr_u::hwloc_cache_attr_s::type
Cache type.

The documentation for this struct was generated from the following file:

· hwloc.h

24.4 hwloc_cl_device_topology_amd Union Reference

#include <opencl.h>

Data Fields

```
    struct {
        cl_uint type
        cl_uint data [5]
    } raw
    struct {
        cl_uint type
        cl_char unused [17]
        cl_char bus
        cl_char device
        cl_char function
    } pcie
```

24.4.1 Field Documentation

24.4.1.1 bus

```
cl_char hwloc_cl_device_topology_amd::bus
```

24.4.1.2 data

```
cl_uint hwloc_cl_device_topology_amd::data[5]
```

24.4.1.3 device

```
cl_char hwloc_cl_device_topology_amd::device
```

24.4.1.4 function

```
cl_char hwloc_cl_device_topology_amd::function
```

24.4.1.5

```
\verb|struct { ... } hwloc_cl_device_topology_amd::pcie|\\
```

24.4.1.6

```
struct { ... } hwloc_cl_device_topology_amd::raw
```

24.4.1.7 type

```
cl_uint hwloc_cl_device_topology_amd::type
```

24.4.1.8 unused

```
cl_char hwloc_cl_device_topology_amd::unused[17]
```

The documentation for this union was generated from the following file:

opencl.h

24.5 hwloc component Struct Reference

#include <plugins.h>

Data Fields

- · unsigned abi
- int(* init)(unsigned long flags)
- void(* finalize)(unsigned long flags)
- · hwloc_component_type_t type
- unsigned long flags
- void * data

24.5.1 Detailed Description

Generic component structure.

Generic components structure, either statically listed by configure in static-components.h or dynamically loaded as a plugin.

24.5.2 Field Documentation

24.5.2.1 abi

unsigned hwloc_component::abi

Component ABI version, set to HWLOC_COMPONENT_ABI.

24.5.2.2 data

void* hwloc_component::data

Component data, pointing to a struct hwloc_disc_component or struct hwloc_xml_component.

24.5.2.3 finalize

void(* hwloc_component::finalize) (unsigned long flags)

Process-wide component termination callback.

This optional callback is called after unregistering the component from the hwloc core (before unloading the plugin). flags is always 0 for now.

Note

If the component uses Itdl for loading its own plugins, it should load/unload them only in init() and finalize(), to avoid race conditions with hwloc's use of Itdl.

24.5.2.4 flags

unsigned long hwloc_component::flags

Component flags, unused for now.

24.5.2.5 init

```
int(* hwloc_component::init) (unsigned long flags)
```

Process-wide component initialization callback.

This optional callback is called when the component is registered to the hwloc core (after loading the plugin).

When the component is built as a plugin, this callback should call hwloc_check_plugin_namespace() and return an negative error code on error.

flags is always 0 for now.

Returns

0 on success, or a negative code on error.

Note

If the component uses Itdl for loading its own plugins, it should load/unload them only in init() and finalize(), to avoid race conditions with hwloc's use of Itdl.

24.5.2.6 type

```
hwloc_component_type_t hwloc_component::type
```

Component type.

The documentation for this struct was generated from the following file:

· plugins.h

24.6 hwloc_disc_component Struct Reference

#include <plugins.h>

Data Fields

- · const char * name
- · unsigned phases
- unsigned excluded_phases
- struct hwloc_backend *(* instantiate)(struct hwloc_topology *topology, struct hwloc_disc_component *component, unsigned excluded_phases, const void *data1, const void *data2, const void *data3)
- · unsigned priority
- · unsigned enabled by default

24.6.1 Detailed Description

Discovery component structure.

This is the major kind of components, taking care of the discovery. They are registered by generic components, either statically-built or as plugins.

24.6.2 Field Documentation

24.6.2.1 enabled_by_default

 ${\tt unsigned\ hwloc_disc_component::enabled_by_default}$

Enabled by default. If unset, if will be disabled unless explicitly requested.

24.6.2.2 excluded_phases

unsigned hwloc_disc_component::excluded_phases

Component phases to exclude, as an OR'ed set of hwloc_disc_phase_t.

For a GLOBAL component, this usually includes all other phases (~UL).

Other components only exclude types that may bring conflicting topology information. MISC components should likely not be excluded since they usually bring non-primary additional information.

24.6.2.3 instantiate

```
struct hwloc_backend*(* hwloc_disc_component::instantiate) (struct hwloc_topology *topology,
struct hwloc_disc_component *component, unsigned excluded_phases, const void *data1, const void
*data2, const void *data3)
```

Instantiate callback to create a backend from the component. Parameters data1, data2, data3 are NULL except for components that have special enabling routines such as hwloc topology set xml().

24.6.2.4 name

```
const char* hwloc_disc_component::name
```

Name. If this component is built as a plugin, this name does not have to match the plugin filename.

24.6.2.5 phases

unsigned hwloc_disc_component::phases

Discovery phases performed by this component. OR'ed set of hwloc_disc_phase_t.

24.6.2.6 priority

unsigned hwloc_disc_component::priority

Component priority. Used to sort topology->components, higher priority first. Also used to decide between two components with the same name.

Usual values are 50 for native OS (or platform) components, 45 for x86, 40 for no-OS fallback, 30 for global components (xml, synthetic), 20 for pci, 10 for other misc components (opencl etc.).

The documentation for this struct was generated from the following file:

· plugins.h

24.7 hwloc disc status Struct Reference

#include <plugins.h>

Data Fields

- · hwloc disc phase t phase
- · unsigned excluded phases
- unsigned long flags

24.7.1 Detailed Description

Discovery status structure.

Used by the core and backends to inform about what has been/is being done during the discovery process.

24.7.2 Field Documentation

24.7.2.1 excluded_phases

unsigned hwloc_disc_status::excluded_phases

Dynamically excluded phases. If a component decides during discovery that some phases are no longer needed.

24.7.2.2 flags

unsigned long hwloc_disc_status::flags OR'ed set of hwloc_disc_status_flag_e.

24.7.2.3 phase

hwloc_disc_phase_t hwloc_disc_status::phase

The current discovery phase that is performed. Must match one of the phases in the component phases field. The documentation for this struct was generated from the following file:

· plugins.h

24.8 hwloc_distances_s Struct Reference

#include <distances.h>

Data Fields

- unsigned nbobjs
- hwloc_obj_t * objs
- unsigned long kind
- hwloc_uint64_t * values

24.8.1 Detailed Description

Matrix of distances between a set of objects.

This matrix often contains latencies between NUMA nodes (as reported in the System Locality Distance Information Table (SLIT) in the ACPI specification), which may or may not be physically accurate. It corresponds to the latency for accessing the memory of one node from a core in another node. The corresponding kind is HWLOC_DISTANCES_KIND_FROM_OS | HWLOC_DISTANCES_KIND_FROM_USER. The name of this distances structure is "NUMALatency". Others distance structures include and "XGMIBandwidth" and "NVLink← Bandwidth".

The matrix may also contain bandwidths between random sets of objects, possibly provided by the user, as specified in the kind attribute.

Pointers objs and values should not be replaced, reallocated, freed, etc. However callers are allowed to modify kind as well as the contents of objs and values arrays. For instance, if there is a single NUMA node per Package, hwloc_get_obj_with_same_locality() may be used to convert between them and replace NUMA nodes in the objs array with the corresponding Packages. See also hwloc_distances_transform() for applying some transformations to the structure.

24.8.2 Field Documentation

24.8.2.1 kind

unsigned long hwloc_distances_s::kind OR'ed set of hwloc_distances_kind_e.

24.8.2.2 nbobjs

unsigned hwloc_distances_s::nbobjs

Number of objects described by the distance matrix.

24.8.2.3 objs

hwloc_obj_t* hwloc_distances_s::objs

Array of objects described by the distance matrix. These objects are not in any particular order, see https://hww.color.org/buller.nd/ the distances_obj_pair_values() for easy ways to find objects in this array and their corresponding values.

24.8.2.4 values

hwloc_uint64_t* hwloc_distances_s::values

Matrix of distances between objects, stored as a one-dimension array.

Distance from i-th to j-th object is stored in slot i*nbobjs+j. The meaning of the value depends on the kind attribute. The documentation for this struct was generated from the following file:

· distances.h

#include <hwloc.h>

Data Fields

- unsigned depth
- · unsigned kind
- · unsigned subkind
- · unsigned char dont merge

24.9.1 Detailed Description

Group-specific Object Attributes.

24.9.2 Field Documentation

24.9.2.1 depth

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::depth

Depth of group object. It may change if intermediate Group objects are added.

24.9.2.2 dont_merge

unsigned char hwloc_obj_attr_u::hwloc_group_attr_s::dont_merge

Flag preventing groups from being automatically merged with identical parent or children.

24.9.2.3 kind

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::kind Internally-used kind of group.

24.9.2.4 subkind

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::subkind Internally-used subkind to distinguish different levels of groups with same kind. The documentation for this struct was generated from the following file:

· hwloc.h

24.10 hwloc_info_s Struct Reference

#include <hwloc.h>

Data Fields

- char * name
- · char * value

24.10.1 Detailed Description

Object info.

See also

Consulting and Adding Key-Value Info Attributes

24.10.2 Field Documentation

24.10.2.1 name

char* hwloc_info_s::name
Info name.

24.10.2.2 value

char* hwloc_info_s::value

Info value.

The documentation for this struct was generated from the following file:

· hwloc.h

24.11 hwloc location Struct Reference

#include <memattrs.h>

Data Structures

• union hwloc_location_u

Data Fields

- enum hwloc_location_type_e type
- union hwloc_location::hwloc_location_u location

24.11.1 Detailed Description

Where to measure attributes from.

24.11.2 Field Documentation

24.11.2.1 location

union hwloc_location::hwloc_location_u hwloc_location::location

24.11.2.2 type

enum hwloc_location_type_e hwloc_location::type

Type of location.

The documentation for this struct was generated from the following file:

· memattrs.h

24.12 hwloc_location::hwloc_location_u Union Reference

#include <memattrs.h>

Data Fields

- · hwloc_cpuset_t cpuset
- · hwloc_obj_t object

24.12.1 Detailed Description

Actual location.

24.12.2 Field Documentation

24.12.2.1 cpuset

hwloc_cpuset_t hwloc_location::hwloc_location_u::cpuset Location as a cpuset, when the location type is HWLOC_LOCATION_TYPE_CPUSET.

24.12.2.2 object

hwloc_obj_t hwloc_location::hwloc_location_u::object Location as an object, when the location type is HWLOC_LOCATION_TYPE_OBJECT.

The documentation for this union was generated from the following file:

· memattrs.h

24.13 hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_ page_type_s Struct Reference

#include <hwloc.h>

Data Fields

- hwloc_uint64_t size
- hwloc_uint64_t count

24.13.1 Detailed Description

Array of local memory page types, NULL if no local memory and page_types is 0. The array is sorted by increasing size fields. It contains page_types_len slots.

24.13.2 Field Documentation

24.13.2.1 count

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s::count Number of pages of this size.

24.13.2.2 size

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s::size Size of pages.

The documentation for this struct was generated from the following file:

· hwloc.h

24.14 hwloc obj attr u::hwloc numanode attr s Struct Reference

#include <hwloc.h>

Data Structures

• struct hwloc_memory_page_type_s

Data Fields

- hwloc_uint64_t local_memory
- unsigned page_types_len
- struct hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s * page_types

24.14.1 Detailed Description

NUMA node-specific Object Attributes.

24.14.2 Field Documentation

24.14.2.1 local memory

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::local_memory Local memory (in bytes)

24.14.2.2 page_types

 $struct\ hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s\ *\ hwloc_obj_attr_u \leftrightarrow ::hwloc_numanode_attr_s::page_types$

24.14.2.3 page_types_len

```
unsigned hwloc_obj_attr_u::hwloc_numanode_attr_s::page_types_len Size of array page_types.
```

The documentation for this struct was generated from the following file:

· hwloc.h

24.15 hwloc_obj Struct Reference

#include <hwloc.h>

Data Fields

- · hwloc_obj_type_t type
- char * subtype
- · unsigned os_index
- char * name
- · hwloc uint64 t total memory
- union hwloc_obj_attr_u * attr
- · int depth
- unsigned logical_index
- struct hwloc_obj * next_cousin
- struct hwloc obj * prev cousin
- struct hwloc_obj * parent
- unsigned sibling_rank
- struct hwloc_obj * next_sibling
- struct hwloc_obj * prev_sibling
- int symmetric_subtree
- hwloc_cpuset_t cpuset
- hwloc_cpuset_t complete_cpuset
- hwloc_nodeset_t nodeset
- · hwloc nodeset t complete nodeset
- struct hwloc info s * infos
- unsigned infos_count
- void * userdata
- hwloc_uint64_t gp_index

List and array of normal children below this object (except Memory, I/O and Misc children).

- · unsigned arity
- struct hwloc obj ** children
- struct hwloc_obj * first_child
- struct hwloc_obj * last_child

List of Memory children below this object.

- · unsigned memory arity
- struct hwloc_obj * memory_first_child

List of I/O children below this object.

- unsigned io_arity
- struct hwloc_obj * io_first_child

List of Misc children below this object.

- unsigned misc_arity
- struct hwloc_obj * misc_first_child

24.15.1 Detailed Description

Structure of a topology object.

Applications must not modify any field except hwloc_obj.userdata.

24.15.2 Field Documentation

24.15.2.1 arity

```
unsigned hwloc_obj::arity
```

Number of normal children. Memory, Misc and I/O children are not listed here but rather in their dedicated children list

24.15.2.2 attr

```
union hwloc_obj_attr_u* hwloc_obj::attr
```

Object type-specific Attributes, may be NULL if no attribute value was found.

24.15.2.3 children

```
struct hwloc_obj** hwloc_obj::children
Normal children, children[0 .. arity -1].
```

24.15.2.4 complete_cpuset

```
hwloc_cpuset_t hwloc_obj::complete_cpuset
```

The complete CPU set of processors of this object,.

This may include not only the same as the cpuset field, but also some CPUs for which topology information is unknown or incomplete, some offlines CPUs, and the CPUs that are ignored when the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED flag is not set. Thus no corresponding PU object may be found in the topology, because the precise position is undefined. It is however known that it would be somewhere under this object.

Note

Its value must not be changed, hwloc_bitmap_dup() must be used instead.

24.15.2.5 complete nodeset

```
hwloc_nodeset_t hwloc_obj::complete_nodeset
```

The complete NUMA node set of this object,.

This may include not only the same as the nodeset field, but also some NUMA nodes for which topology information is unknown or incomplete, some offlines nodes, and the nodes that are ignored when the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED flag is not set. Thus no corresponding NUMA node object may be found in the topology, because the precise position is undefined. It is however known that it would be somewhere under this object.

If there are no NUMA nodes in the machine, all the memory is close to this object, so only the first bit is set in complete_nodeset.

Note

Its value must not be changed, hwloc bitmap dup() must be used instead.

24.15.2.6 cpuset

hwloc_cpuset_t hwloc_obj::cpuset

CPUs covered by this object.

Note

All objects have non-NULL CPU and node sets except Misc and I/O objects.

Its value must not be changed, hwloc_bitmap_dup() must be used instead.

24.15.2.7 depth

int hwloc_obj::depth

Vertical index in the hierarchy.

For normal objects, this is the depth of the horizontal level that contains this object and its cousins of the same type. If the topology is symmetric, this is equal to the parent depth plus one, and also equal to the number of parent/child links from the root object to here.

For special objects (NUMA nodes, I/O and Misc) that are not in the main tree, this is a special negative value that corresponds to their dedicated level, see hwloc_get_type_depth() and hwloc_get_type_depth() and hwloc_get_type_depth() as usual.

24.15.2.8 first_child

struct hwloc_obj* hwloc_obj::first_child
First normal child.

24.15.2.9 gp_index

hwloc_uint64_t hwloc_obj::gp_index

Global persistent index. Generated by hwloc, unique across the topology (contrary to os_index) and persistent across topology changes (contrary to logical_index). Mostly used internally, but could also be used by application to identify objects.

24.15.2.10 infos

struct hwloc_info_s* hwloc_obj::infos Array of stringified info type=name.

24.15.2.11 infos count

unsigned hwloc_obj::infos_count Size of infos array.

24.15.2.12 io_arity

unsigned hwloc_obj::io_arity

Number of I/O children. These children are listed in io first child.

24.15.2.13 io_first_child

```
struct hwloc_obj* hwloc_obj::io_first_child
```

First I/O child. Bridges, PCI and OS devices are listed here (io_arity and io_first_child) instead of in the normal children list. See also hwloc_obj_type_is_io().

24.15.2.14 last child

```
struct hwloc_obj* hwloc_obj::last_child
Last normal child.
```

24.15.2.15 logical index

```
unsigned hwloc_obj::logical_index
```

Horizontal index in the whole list of similar objects, hence guaranteed unique across the entire machine. Could be a "cousin_rank" since it's the rank within the "cousin" list below Note that this index may change when restricting the topology or when inserting a group.

24.15.2.16 memory_arity

```
unsigned hwloc_obj::memory_arity
```

Number of Memory children. These children are listed in memory_first_child.

24.15.2.17 memory_first_child

```
struct hwloc_obj* hwloc_obj::memory_first_child
```

First Memory child. NUMA nodes and Memory-side caches are listed here (memory_arity and memory_ child) instead of in the normal children list. See also hwloc_obj_type_is_memory().

A memory hierarchy starts from a normal CPU-side object (e.g. Package) and ends with NUMA nodes as leaves. There might exist some memory-side caches between them in the middle of the memory subtree.

24.15.2.18 misc arity

```
unsigned hwloc_obj::misc_arity
```

Number of Misc children. These children are listed in misc_first_child.

24.15.2.19 misc_first_child

```
struct hwloc_obj* hwloc_obj::misc_first_child
```

First Misc child. Misc objects are listed here (misc_arity and misc_first_child) instead of in the normal children list.

24.15.2.20 name

```
char* hwloc_obj::name
```

Object-specific name if any. Mostly used for identifying OS devices and Misc objects where a name string is more useful than numerical indexes.

24.15.2.21 next_cousin

```
struct hwloc_obj* hwloc_obj::next_cousin
```

Next object of same type and depth.

24.15.2.22 next_sibling

```
struct hwloc_obj* hwloc_obj::next_sibling
```

Next object below the same parent (inside the same list of children).

24.15.2.23 nodeset

hwloc_nodeset_t hwloc_obj::nodeset

NUMA nodes covered by this object or containing this object.

This is the set of NUMA nodes for which there are NUMA node objects in the topology under or above this object, i.e. which are known to be physically contained in this object or containing it and known how (the children path between this object and the NUMA node objects).

In the end, these nodes are those that are close to the current object. Function hwloc_get_local_numanode_objs() may be used to list those NUMA nodes more precisely.

If the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED configuration flag is set, some of these nodes may not be allowed for allocation, see hwloc_topology_get_allowed_nodeset().

If there are no NUMA nodes in the machine, all the memory is close to this object, so only the first bit may be set in nodeset.

Note

All objects have non-NULL CPU and node sets except Misc and I/O objects.

Its value must not be changed, hwloc bitmap dup() must be used instead.

24.15.2.24 os index

unsigned hwloc_obj::os_index

OS-provided physical index number. It is not guaranteed unique across the entire machine, except for PUs and NUMA nodes. Set to HWLOC_UNKNOWN_INDEX if unknown or irrelevant for this object.

24.15.2.25 parent

```
struct hwloc_obj* hwloc_obj::parent
Parent, NULL if root (Machine object)
```

24.15.2.26 prev_cousin

```
struct hwloc_obj* hwloc_obj::prev_cousin
```

Previous object of same type and depth.

24.15.2.27 prev_sibling

```
struct hwloc_obj* hwloc_obj::prev_sibling
```

Previous object below the same parent (inside the same list of children).

24.15.2.28 sibling rank

```
unsigned hwloc_obj::sibling_rank
```

Index in parent's children[] array. Or the index in parent's Memory, I/O or Misc children list.

24.15.2.29 subtype

```
char* hwloc_obj::subtype
```

Subtype string to better describe the type field.

24.15.2.30 symmetric_subtree

```
int hwloc_obj::symmetric_subtree
```

Set if the subtree of normal objects below this object is symmetric, which means all normal children and their children have identical subtrees.

Memory, I/O and Misc children are ignored.

If set in the topology root object, Istopo may export the topology as a synthetic string.

24.15.2.31 total memory

```
hwloc_uint64_t hwloc_obj::total_memory
```

Total memory (in bytes) in NUMA nodes below this object.

24.15.2.32 type

```
hwloc_obj_type_t hwloc_obj::type
```

Type of object.

24.15.2.33 userdata

```
void* hwloc_obj::userdata
```

The documentation for this struct was generated from the following file:

· hwloc.h

24.16 hwloc_obj_attr_u Union Reference

#include <hwloc.h>

Data Structures

- struct hwloc_bridge_attr_s
- struct hwloc_cache_attr_s
- struct hwloc_group_attr_s
- struct hwloc_numanode_attr_s
- struct hwloc_osdev_attr_s
- struct hwloc_pcidev_attr_s

Data Fields

- · struct hwloc obj attr u::hwloc numanode attr s numanode
- struct hwloc_obj_attr_u::hwloc_cache_attr_s cache
- struct hwloc_obj_attr_u::hwloc_group_attr_s group
- struct hwloc_obj_attr_u::hwloc_pcidev_attr_s pcidev
- · struct hwloc obj attr u::hwloc bridge attr s bridge
- struct hwloc_obj_attr_u::hwloc_osdev_attr_s osdev

24.16.1 Detailed Description

Object type-specific Attributes.

24.16.2 Field Documentation

24.16.2.1 bridge

struct hwloc_obj_attr_u::hwloc_bridge_attr_s hwloc_obj_attr_u::bridge

24.16.2.2 cache

struct hwloc_obj_attr_u::hwloc_cache_attr_s hwloc_obj_attr_u::cache

24.16.2.3 group

struct hwloc_obj_attr_u::hwloc_group_attr_s hwloc_obj_attr_u::group

24.16.2.4 numanode

struct hwloc_obj_attr_u::hwloc_numanode_attr_s hwloc_obj_attr_u::numanode

24.16.2.5 osdev

struct hwloc_obj_attr_u::hwloc_osdev_attr_s hwloc_obj_attr_u::osdev

24.16.2.6 pcidev

struct hwloc_obj_attr_u::hwloc_pcidev_attr_s hwloc_obj_attr_u::pcidev The documentation for this union was generated from the following file:

· hwloc.h

24.17 hwloc_obj_attr_u::hwloc_osdev_attr_s Struct Reference

#include <hwloc.h>

Data Fields

· hwloc_obj_osdev_type_t type

24.17.1 Detailed Description

OS Device specific Object Attributes.

24.17.2 Field Documentation

24.17.2.1 type

The documentation for this struct was generated from the following file:

· hwloc.h

24.18 hwloc_obj_attr_u::hwloc_pcidev_attr_s Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned short domain
- · unsigned char bus
- · unsigned char dev
- · unsigned char func
- · unsigned short class_id
- unsigned short vendor_id
- · unsigned short device_id
- · unsigned short subvendor_id
- unsigned short subdevice_id
- unsigned char revision
- · float linkspeed

24.18.1 Detailed Description

PCI Device specific Object Attributes.

24.18.2 Field Documentation

24.18.2.1 bus

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::bus

24.18.2.2 class_id

 ${\tt unsigned \ short \ hwloc_obj_attr_u::hwloc_pcidev_attr_s::class_id}$

24.18.2.3 dev

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::dev

24.18.2.4 device_id

 $\verb"unsigned" short hwloc_obj_attr_u::hwloc_pcidev_attr_s::device_id"$

24.18.2.5 domain

 ${\tt unsigned \ short \ hwloc_obj_attr_u::hwloc_pcidev_attr_s::domain}$

24.18.2.6 func

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::func

24.18.2.7 linkspeed

float hwloc_obj_attr_u::hwloc_pcidev_attr_s::linkspeed

24.18.2.8 revision

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::revision

24.18.2.9 subdevice_id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::subdevice_id

24.18.2.10 subvendor_id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::subvendor_id

24.18.2.11 vendor id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::vendor_id The documentation for this struct was generated from the following file:

· hwloc.h

24.19 hwloc_topology_cpubind_support Struct Reference

#include <hwloc.h>

Data Fields

- unsigned char set_thisproc_cpubind
- unsigned char get_thisproc_cpubind
- unsigned char set_proc_cpubind
- · unsigned char get_proc_cpubind
- · unsigned char set_thisthread_cpubind
- unsigned char get_thisthread_cpubind
- unsigned char set_thread_cpubind
- unsigned char get_thread_cpubind
- unsigned char get_thisproc_last_cpu_location
- unsigned char get_proc_last_cpu_location
- unsigned char get_thisthread_last_cpu_location

24.19.1 Detailed Description

Flags describing actual PU binding support for this topology.

A flag may be set even if the feature isn't supported in all cases (e.g. binding to random sets of non-contiguous objects).

24.19.2 Field Documentation

24.19.2.1 get_proc_cpubind

unsigned char hwloc_topology_cpubind_support::get_proc_cpubind Getting the binding of a whole given process is supported.

24.19.2.2 get_proc_last_cpu_location

 $\label{lem:constraint} \begin{tabular}{ll} unsigned char hwloc_topology_cpubind_support::get_proc_last_cpu_location \\ \begin{tabular}{ll} Getting the last processors where a whole process ran is supported \\ \begin{tabular}{ll} class constraints (a) & (a) & (b) & (c) &$

24.19.2.3 get thisproc cpubind

unsigned char $hwloc_topology_cpubind_support::get_thisproc_cpubind$ Getting the binding of the whole current process is supported.

24.19.2.4 get thisproc last cpu location

unsigned char hwloc_topology_cpubind_support::get_thisproc_last_cpu_location Getting the last processors where the whole current process ran is supported

24.19.2.5 get_thisthread_cpubind

unsigned char hwloc_topology_cpubind_support::get_thisthread_cpubind Getting the binding of the current thread only is supported.

24.19.2.6 get thisthread last cpu location

 $\label{lem:constraint} \begin{tabular}{ll} unsigned char $hwloc_topology_cpubind_support::get_thisthread_last_cpu_location \\ \begin{tabular}{ll} Getting the last processors where the current thread ran is supported \\ \begin{tabular}{ll} class constraints (a) & constraints (b) & constraints (c) & c$

24.19.2.7 get_thread_cpubind

unsigned char hwloc_topology_cpubind_support::get_thread_cpubind Getting the binding of a given thread only is supported.

24.19.2.8 set_proc_cpubind

unsigned char hwloc_topology_cpubind_support::set_proc_cpubind Binding a whole given process is supported.

24.19.2.9 set_thisproc_cpubind

unsigned char hwloc_topology_cpubind_support::set_thisproc_cpubind Binding the whole current process is supported.

24.19.2.10 set_thisthread_cpubind

unsigned char hwloc_topology_cpubind_support::set_thisthread_cpubind Binding the current thread only is supported.

24.19.2.11 set thread cpubind

unsigned char hwloc_topology_cpubind_support::set_thread_cpubind Binding a given thread only is supported.

The documentation for this struct was generated from the following file:

· hwloc.h

24.20 hwloc_topology_diff_u::hwloc_topology_diff_generic_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next

24.20.1 Field Documentation

24.20.1.1 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_generic_s::next

24.20.1.2 type

 $\label{loc_topology_diff_type_t} $$ hwloc_topology_diff_u::hwloc_topology_diff_generic_s::type $$ The documentation for this struct was generated from the following file:$

· diff.h

24.21 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_ generic_s Struct Reference

#include <diff.h>

Data Fields

hwloc_topology_diff_obj_attr_type_t type

24.21.1 Field Documentation

24.21.1.1 type

The documentation for this struct was generated from the following file:

· diff.h

24.22 hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next
- int obj_depth
- unsigned obj_index
- union hwloc_topology_diff_obj_attr_u diff

24.22.1 Field Documentation

24.22.1.1 diff

 $\label{local_constraint} union \ hwloc_topology_diff_obj_attr_u \ hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s \\ \\ ::diff$

24.22.1.2 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::next

24.22.1.3 obj_depth

int hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::obj_depth

24.22.1.4 obj_index

unsigned hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::obj_index

24.22.1.5 type

hwloc_topology_diff_type_t hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::type
The documentation for this struct was generated from the following file:

· diff.h

24.23 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_⊸ string s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_obj_attr_type_t type
- char * name
- char * oldvalue
- char * newvalue

24.23.1 Detailed Description

String attribute modification with an optional name.

24.23.2 Field Documentation

24.23.2.1 name

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::name

24.23.2.2 newvalue

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::newvalue

24.23.2.3 oldvalue

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::oldvalue

24.23.2.4 type

 $\label{loc_topology_diff_obj_attr_type_t} $$ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_$$ attr_string_s::type $$ for each of the context of$

The documentation for this struct was generated from the following file:

· diff.h

24.24 hwloc_topology_diff_obj_attr_u Union Reference

#include <diff.h>

Data Structures

- struct hwloc_topology_diff_obj_attr_generic_s
- struct hwloc_topology_diff_obj_attr_string_s
- struct hwloc_topology_diff_obj_attr_uint64_s

Data Fields

- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s generic
- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s uint64
- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s string

24.24.1 Detailed Description

One object attribute difference.

24.24.2 Field Documentation

24.24.2.1 generic

 $struct\ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s\ hwloc_topology \\ _diff_obj_attr_u::generic$

24.24.2.2 string

 $struct\ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s\ hwloc_topology_\leftrightarrow diff_obj_attr_u::string$

24.24.2.3 uint64

 $struct\ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s\ hwloc_topology_\leftrightarrow\ diff_obj_attr_u::uint64$

The documentation for this union was generated from the following file:

· diff.h

24.25 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_⇔ uint64 s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_obj_attr_type_t type
- hwloc_uint64_t index
- hwloc_uint64_t oldvalue
- hwloc_uint64_t newvalue

24.25.1 Detailed Description

Integer attribute modification with an optional index.

24.25.2 Field Documentation

24.25.2.1 index

hwloc_uint64_t hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s::index

24.25.2.2 newvalue

hwloc_uint64_t hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s::newvalue

24.25.2.3 oldvalue

 $\verb|hwloc_uint64_t| hwloc_topology_diff_obj_attr_u:: \verb|hwloc_topology_diff_obj_attr_uint64_s:: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s:: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s: oldvalue| | hwloc_topology_di$

24.25.2.4 type

 $\label{loc_topology_diff_obj_attr_type_t} $$ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_$$ attr_uint64_s::type $$ for each of the context of$

The documentation for this struct was generated from the following file:

• diff.h

24.26 hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next
- int obj_depth
- unsigned obj_index

24.26.1 Field Documentation

24.26.1.1 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::next

24.26.1.2 obj_depth

int hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::obj_depth

24.26.1.3 obj_index

unsigned hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::obj_index

24.26.1.4 type

hwloc_topology_diff_type_t hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::type
The documentation for this struct was generated from the following file:

• diff.h

24.27 hwloc_topology_diff_u Union Reference

#include <diff.h>

Data Structures

- struct hwloc_topology_diff_generic_s
- struct hwloc_topology_diff_obj_attr_s
- struct hwloc_topology_diff_too_complex_s

Data Fields

- struct hwloc_topology_diff_u::hwloc_topology_diff_generic_s generic
- struct hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s obj_attr
- struct hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s too_complex

24.27.1 Detailed Description

One element of a difference list between two topologies.

24.27.2 Field Documentation

24.27.2.1 generic

struct hwloc_topology_diff_u::hwloc_topology_diff_generic_s hwloc_topology_diff_u::generic

24.27.2.2 obj_attr

 $\verb|struct| hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s| hwloc_topology_diff_u::obj_attr_s| hwloc_topology_diff$

24.27.2.3 too_complex

 $struct\ hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s\ hwloc_topology_diff_u::too_{\hookleftarrow complex}$

The documentation for this union was generated from the following file:

· diff.h

24.28 hwloc_topology_discovery_support Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned char pu
- · unsigned char numa
- unsigned char numa_memory
- · unsigned char disallowed pu
- · unsigned char disallowed_numa
- · unsigned char cpukind_efficiency

24.28.1 Detailed Description

Flags describing actual discovery support for this topology.

24.28.2 Field Documentation

24.28.2.1 cpukind_efficiency

unsigned char hwloc_topology_discovery_support::cpukind_efficiency Detecting the efficiency of CPU kinds is supported, see Kinds of CPU cores.

24.28.2.2 disallowed_numa

unsigned char hwloc_topology_discovery_support::disallowed_numa

Detecting and identifying NUMA nodes that are not available to the current process is supported.

24.28.2.3 disallowed pu

 $unsigned \ char \ hwloc_topology_discovery_support:: disallowed_pu$

Detecting and identifying PU objects that are not available to the current process is supported.

24.28.2.4 numa

unsigned char hwloc_topology_discovery_support::numa Detecting the number of NUMA nodes is supported.

24.28.2.5 numa_memory

unsigned char hwloc_topology_discovery_support::numa_memory Detecting the amount of memory in NUMA nodes is supported.

24.28.2.6 pu

unsigned char hwloc_topology_discovery_support::pu

Detecting the number of PU objects is supported.

The documentation for this struct was generated from the following file:

· hwloc.h

24.29 hwloc_topology_membind_support Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned char set_thisproc_membind
- · unsigned char get_thisproc_membind
- unsigned char set_proc_membind
- unsigned char get_proc_membind
- · unsigned char set thisthread membind
- · unsigned char get_thisthread_membind
- unsigned char set_area_membind
- · unsigned char get_area_membind
- unsigned char alloc_membind
- · unsigned char firsttouch_membind
- unsigned char bind_membind
- · unsigned char interleave_membind
- unsigned char nexttouch_membind
- unsigned char migrate_membind
- unsigned char get_area_memlocation

24.29.1 Detailed Description

Flags describing actual memory binding support for this topology.

A flag may be set even if the feature isn't supported in all cases (e.g. binding to random sets of non-contiguous objects).

24.29.2 Field Documentation

24.29.2.1 alloc_membind

unsigned char hwloc_topology_membind_support::alloc_membind Allocating a bound memory area is supported.

24.29.2.2 bind membind

unsigned char hwloc_topology_membind_support::bind_membind Bind policy is supported.

24.29.2.3 firsttouch_membind

 $\label{lem:constraint} unsigned \ char \ hwloc_topology_membind_support:: firsttouch_membind \\ \textbf{First-touch policy is supported}.$

24.29.2.4 get area membind

unsigned char hwloc_topology_membind_support::get_area_membind Getting the binding of a given memory area is supported.

24.29.2.5 get area memlocation

unsigned char hwloc_topology_membind_support::get_area_memlocation Getting the last NUMA nodes where a memory area was allocated is supported

24.29.2.6 get_proc_membind

unsigned char hwloc_topology_membind_support::get_proc_membind Getting the binding of a whole given process is supported.

24.29.2.7 get thisproc membind

unsigned char hwloc_topology_membind_support::get_thisproc_membind Getting the binding of the whole current process is supported.

24.29.2.8 get_thisthread_membind

unsigned char hwloc_topology_membind_support::get_thisthread_membind Getting the binding of the current thread only is supported.

24.29.2.9 interleave membind

unsigned char hwloc_topology_membind_support::interleave_membind Interleave policy is supported.

24.29.2.10 migrate membind

 $\label{lem:constraint} \mbox{unsigned char hwloc_topology_membind_support::migrate_membind} \\ \mbox{Migration flags is supported.}$

24.29.2.11 nexttouch_membind

unsigned char hwloc_topology_membind_support::nexttouch_membind Next-touch migration policy is supported.

24.29.2.12 set area membind

unsigned char hwloc_topology_membind_support::set_area_membind Binding a given memory area is supported.

24.29.2.13 set_proc_membind

unsigned char hwloc_topology_membind_support::set_proc_membind Binding a whole given process is supported.

24.29.2.14 set_thisproc_membind

unsigned char hwloc_topology_membind_support::set_thisproc_membind Binding the whole current process is supported.

24.29.2.15 set_thisthread_membind

 $\label{lem:unsigned_char_hwloc_topology_membind_support::set_this thread_membind} \\ \textbf{Binding the current thread only is supported}.$

The documentation for this struct was generated from the following file:

· hwloc.h

24.30 hwloc topology misc support Struct Reference

#include <hwloc.h>

Data Fields

· unsigned char imported support

24.30.1 Detailed Description

Flags describing miscellaneous features.

24.30.2 Field Documentation

24.30.2.1 imported_support

unsigned char hwloc_topology_misc_support::imported_support
Support was imported when importing another topology, see HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT.
The documentation for this struct was generated from the following file:

· hwloc.h

24.31 hwloc topology support Struct Reference

#include <hwloc.h>

Data Fields

- struct hwloc_topology_discovery_support * discovery
- struct hwloc topology cpubind support * cpubind
- struct hwloc_topology_membind_support * membind
- struct hwloc_topology_misc_support * misc

24.31.1 Detailed Description

Set of flags describing actual support for this topology.

This is retrieved with hwloc_topology_get_support()) and will be valid until the topology object is destroyed. Note: the values are correct only after discovery.

24.31.2 Field Documentation

24.31.2.1 cpubind

struct hwloc_topology_cpubind_support* hwloc_topology_support::cpubind

24.31.2.2 discovery

24.31.2.3 membind

struct hwloc_topology_membind_support* hwloc_topology_support::membind

24.31.2.4 misc

struct hwloc_topology_support::misc The documentation for this struct was generated from the following file:

· hwloc.h

Index

```
ahi
                                                      HWLOC LOCAL NUMANODE FLAG ALL, 162
    hwloc component, 208
                                                      hwloc local numanode flag e, 161
Add distances between objects, 157
                                                      HWLOC LOCAL NUMANODE FLAG LARGER LOCALITY,
    hwloc distances add commit, 158
                                                           161
    hwloc_distances_add_create, 158
                                                      HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY,
    hwloc distances add flag e, 158
                                                           161
    HWLOC DISTANCES ADD FLAG GROUP, 158
                                                      HWLOC LOCATION TYPE CPUSET, 162
    HWLOC_DISTANCES_ADD_FLAG_GROUP_INACCURATE/ploc_location_type_e, 162
                                                      HWLOC_LOCATION_TYPE_OBJECT, 162
    hwloc distances add handle t. 157
                                                      hwloc memattr get best initiator, 163
    hwloc distances add values, 159
                                                      hwloc memattr get best target, 163
alloc membind
                                                      hwloc memattr get by name, 164
    hwloc_topology_membind_support, 232
                                                      hwloc_memattr_get_value, 164
                                                      HWLOC_MEMATTR_ID_BANDWIDTH, 162
API version, 81
    HWLOC API VERSION, 81
                                                      HWLOC MEMATTR ID CAPACITY, 162
    HWLOC COMPONENT ABI, 81
                                                      hwloc memattr id e, 162
                                                      HWLOC_MEMATTR_ID_LATENCY, 162
    hwloc_get_api_version, 81
arity
                                                      HWLOC_MEMATTR_ID_LOCALITY, 162
    hwloc_obj, 217
                                                      hwloc_memattr_id_t, 161
                                                  complete_cpuset
associativity
    hwloc obj attr u::hwloc cache attr s, 206
                                                      hwloc obj, 217
attr
                                                  complete nodeset
    hwloc obj, 217
                                                      hwloc obj. 217
                                                  Components and Plugins: Core functions to be used by
bind membind
                                                          components, 194
    hwloc_topology_membind_support, 232
                                                      hwloc insert object by cpuset, 195
bridge
                                                      hwloc alloc setup object, 195
    hwloc_obj_attr_u, 222
                                                      hwloc_hide_errors, 195
bus
                                                      hwloc_insert_object_by_parent, 195
    hwloc cl device topology amd, 207
                                                      hwloc obj add children sets, 196
    hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223
                                                      hwloc plugin check namespace, 196
                                                      hwloc_topology_reconnect, 196
cache
                                                  Components and Plugins: Discovery backends, 192
    hwloc_obj_attr_u, 222
                                                      hwloc backend alloc, 193
Changing the Source of Topology Discovery, 107
                                                      hwloc backend enable, 193
    HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLISTWLOC_DISC_PHASE_ANNOTATE, 193
        107
                                                      HWLOC_DISC_PHASE_CPU, 193
    hwloc topology components flag e, 107
                                                      hwloc disc phase e, 192
    hwloc topology set components, 107
                                                      HWLOC DISC PHASE GLOBAL, 193
    hwloc topology set pid, 107
                                                      HWLOC_DISC_PHASE_IO, 193
    hwloc_topology_set_synthetic, 108
                                                      HWLOC_DISC_PHASE_MEMORY, 193
    hwloc_topology_set_xml, 108
                                                      HWLOC DISC PHASE MISC, 193
    hwloc_topology_set_xmlbuffer, 109
                                                      HWLOC DISC PHASE PCI, 193
children
                                                      hwloc disc phase t, 192
    hwloc_obj, 217
                                                      HWLOC_DISC_PHASE_TWEAK, 193
class id
                                                      hwloc disc_status_flag_e, 193
    hwloc obj attr u::hwloc pcidev attr s, 223
                                                      HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_RESOURCES,
Comparing memory node attributes for finding where to
                                                           193
        allocate on, 160
                                                  Components and Plugins: Discovery components, 191
    hwloc_get_local_numanode_objs, 162
```

Components and Plugins: Filtering objects, 196	hwloc_get_proc_last_cpu_location, 98
hwloc_filter_check_keep_object, 197	hwloc_get_thread_cpubind, 99
hwloc_filter_check_keep_object_type, 197	hwloc_set_cpubind, 99
hwloc_filter_check_osdev_subtype_important, 197	hwloc_set_proc_cpubind, 99
hwloc_filter_check_pcidev_subtype_important,	hwloc_set_thread_cpubind, 100
197	cpubind
Components and Plugins: finding PCI objects during	hwloc_topology_support, 234
other discoveries, 199	cpukind_efficiency
hwloc_backend_distances_add_commit, 199	hwloc_topology_discovery_support, 231
hwloc_backend_distances_add_create, 200	cpuset
hwloc_backend_distances_add_handle_t, 199	hwloc_location::hwloc_location_u, 214
hwloc_backend_distances_add_values, 200	hwloc_obj, 217
hwloc_pci_find_by_busid, 200	data
hwloc_pci_find_parent_by_busid, 200	data
Components and Plugins: Generic components, 193	hwloc_cl_device_topology_amd, 207
HWLOC_COMPONENT_TYPE_DISC, 194	hwloc_component, 208
hwloc_component_type_e, 194	depth
hwloc_component_type_t, 194	hwloc_obj, 218
HWLOC_COMPONENT_TYPE_XML, 194	hwloc_obj_attr_u::hwloc_bridge_attr_s, 205
Components and Plugins: helpers for PCI discovery, 197	hwloc_obj_attr_u::hwloc_cache_attr_s, 206
hwloc_pcidisc_check_bridge_type, 198	hwloc_obj_attr_u::hwloc_group_attr_s, 212
hwloc_pcidisc_find_bridge_buses, 198	dev
hwloc_pcidisc_find_cap, 198	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223 device
hwloc_pcidisc_find_linkspeed, 198	
hwloc_pcidisc_tree_attach, 198	hwloc_cl_device_topology_amd, 207
hwloc_pcidisc_tree_insert_by_busid, 199	device_id hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223
Consulting and Adding Key-Value Info Attributes, 95	diff
hwloc_obj_add_info, 95	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s
hwloc_obj_get_info_by_name, 96	227
Converting between CPU sets and node sets, 134	disable
hwloc_cpuset_from_nodeset, 134	hwloc_backend, 203
hwloc_cpuset_to_nodeset, 134	disallowed_numa
Converting between Object Types and Attributes, and	hwloc_topology_discovery_support, 231
Strings, 93	disallowed_pu
hwloc_obj_attr_snprintf, 93	hwloc_topology_discovery_support, 231
hwloc_obj_type_snprintf, 94	discover
hwloc_obj_type_string, 94	hwloc_backend, 203
hwloc_type_sscanf, 94	discovery
hwloc_type_sscanf_as_depth, 95	hwloc_topology_support, 235
count hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_r	_ ,
215	hwloc_distrib, 131
CPU and node sets of entire topologies, 132	HWLOC DISTRIB FLAG REVERSE, 131
hwloc topology get allowed cpuset, 132	hwloc_distrib_flags_e, 131
hwloc topology get allowed nodeset, 132	domain
hwloc_topology_get_complete_cpuset, 133	hwloc obj attr u::hwloc bridge attr s, 205
hwloc_topology_get_complete_nodeset, 133	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223
hwloc_topology_get_topology_cpuset, 133	dont_merge
hwloc_topology_get_topology_nodeset, 134	hwloc_obj_attr_u::hwloc_group_attr_s, 212
CPU binding, 96	downstream
hwloc_cpubind_flags_t, 97	hwloc_obj_attr_u::hwloc_bridge_attr_s, 205
HWLOC_CPUBIND_NOMEMBIND, 98	downstream_type
HWLOC_CPUBIND_PROCESS, 97	hwloc_obj_attr_u::hwloc_bridge_attr_s, 205
HWLOC_CPUBIND_STRICT, 97	
HWLOC_CPUBIND_THREAD, 97	enabled_by_default
hwloc_get_cpubind, 98	hwloc_disc_component, 209
hwloc_get_last_cpu_location, 98	excluded_phases
hwloc_get_proc_cpubind, 98	hwloc_disc_component, 209

Exporting Topologies to Synthetic, 151	hwloc_get_pu_obj_by_os_index, 131
hwloc_topology_export_synthetic, 152	first_child
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG	G_IGNOMREE_MOENLOBY,
152	firsttouch_membind
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG	
152	flags
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG	-
152	hwloc_component, 208
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG	
152	func
hwloc_topology_export_synthetic_flags_e, 151	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223
Exporting Topologies to XML, 148	function
hwloc_export_obj_userdata, 149	hwloc_cl_device_topology_amd, 207
hwloc_export_obj_userdata_base64, 149	imos_si_dovico_topology_dina; 207
hwloc_free_xmlbuffer, 149	generic
hwloc_topology_export_xml, 150	hwloc_topology_diff_obj_attr_u, 228
HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1,	hwloc_topology_diff_u, 230
149	get area membind
	hwloc_topology_membind_support, 233
hwloc_topology_export_xml_flags_e, 148	get area memlocation
hwloc_topology_export_xmlbuffer, 150	hwloc topology membind support, 233
hwloc_topology_set_userdata_export_callback,	get_pci_busid_cpuset
150	hwloc_backend, 204
hwloc_topology_set_userdata_import_callback,	get proc cpubind
151	-
finalize	hwloc_topology_cpubind_support, 224
	get_proc_last_cpu_location
hwloc_component, 208	hwloc_topology_cpubind_support, 225
Finding I/O objects, 135	get_proc_membind
hwloc_bridge_covers_pcibus, 135	hwloc_topology_membind_support, 233
hwloc_get_next_bridge, 135	get_thisproc_cpubind
hwloc_get_next_osdev, 135	hwloc_topology_cpubind_support, 225
hwloc_get_next_pcidev, 135	get_thisproc_last_cpu_location
hwloc_get_non_io_ancestor_obj, 136	hwloc_topology_cpubind_support, 225
hwloc_get_pcidev_by_busid, 136	get_thisproc_membind
hwloc_get_pcidev_by_busidstring, 136	hwloc_topology_membind_support, 233
Finding Objects covering at least CPU set, 123	get_thisthread_cpubind
hwloc_get_child_covering_cpuset, 123	hwloc_topology_cpubind_support, 225
hwloc_get_next_obj_covering_cpuset_by_depth,	get_thisthread_last_cpu_location
123	hwloc_topology_cpubind_support, 225
hwloc_get_next_obj_covering_cpuset_by_type,	get_thisthread_membind
124	hwloc_topology_membind_support, 233
hwloc_get_obj_covering_cpuset, 124	get_thread_cpubind
Finding Objects inside a CPU set, 120	hwloc_topology_cpubind_support, 225
hwloc_get_first_largest_obj_inside_cpuset, 120	gp_index
hwloc_get_largest_objs_inside_cpuset, 121	hwloc_obj, 218
hwloc_get_nbobjs_inside_cpuset_by_depth, 121	group
hwloc_get_nbobjs_inside_cpuset_by_type, 121	hwloc obj attr u, 222
hwloc_get_next_obj_inside_cpuset_by_depth, 121	_ <i>i</i> ·
hwloc_get_next_obj_inside_cpuset_by_type, 122	Helpers for consulting distance matrices, 156
hwloc_get_obj_index_inside_cpuset, 122	hwloc_distances_obj_index, 156
hwloc_get_obj_inside_cpuset_by_depth, 122	hwloc_distances_obj_pair_values, 157
hwloc_get_obj_inside_cpuset_by_type, 122	hwlocinsert_object_by_cpuset
Finding objects, miscellaneous helpers, 128	Components and Plugins: Core functions to be
hwloc_bitmap_singlify_per_core, 128	used by components, 195
hwloc_get_closest_objs, 129	hwloc_alloc
hwloc_get_numanode_obj_by_os_index, 129	Memory binding, 103
hwloc_get_obj_below_array_by_type, 129	hwloc_alloc_membind
hwloc_get_obj_below_by_type, 130	Memory binding, 103
hwloc_get_obj_below_by_type, 100	hwloc_alloc_membind_policy
mmoo_got_obj_min_bamo_iocality, 100	56

Memory binding, 103	hwloc_bitmap_compare_first
hwloc_alloc_setup_object	The bitmap API, 140
Components and Plugins: Core functions to be	hwloc_bitmap_copy
used by components, 195 HWLOC_ALLOW_FLAG_ALL	The bitmap API, 141 hwloc bitmap dup
Modifying a loaded Topology, 117	The bitmap API, 141
HWLOC_ALLOW_FLAG_CUSTOM	hwloc_bitmap_fill
Modifying a loaded Topology, 117	The bitmap API, 141
HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS	hwloc bitmap first
Modifying a loaded Topology, 117	The bitmap API, 141
hwloc_allow_flags_e	hwloc_bitmap_first_unset
Modifying a loaded Topology, 117	The bitmap API, 141
HWLOC_API_VERSION	hwloc_bitmap_foreach_begin
API version, 81	The bitmap API, 138
hwloc_backend, 203	hwloc_bitmap_foreach_end
disable, 203	The bitmap API, 138
discover, 203	hwloc_bitmap_free
flags, 203	The bitmap API, 141
get_pci_busid_cpuset, 204	hwloc_bitmap_from_ith_ulong
is_thissystem, 204	The bitmap API, 142
phases, 204	hwloc_bitmap_from_ulong
private_data, 204 hwloc backend alloc	The bitmap API, 142
Components and Plugins: Discovery backends,	hwloc_bitmap_from_ulongs The bitmap API, 142
193	hwloc_bitmap_intersects
hwloc_backend_distances_add_commit	The bitmap API, 142
Components and Plugins: finding PCI objects dur-	hwloc_bitmap_isequal
ing other discoveries, 199	The bitmap API, 142
hwloc_backend_distances_add_create	hwloc_bitmap_isfull
Components and Plugins: finding PCI objects dur-	The bitmap API, 142
ing other discoveries, 200	hwloc_bitmap_isincluded
hwloc_backend_distances_add_handle_t	The bitmap API, 143
Components and Plugins: finding PCI objects dur-	hwloc_bitmap_isset
ing other discoveries, 199	The bitmap API, 143
hwloc_backend_distances_add_values	hwloc_bitmap_iszero
Components and Plugins: finding PCI objects dur-	The bitmap API, 143
ing other discoveries, 200	hwloc_bitmap_last
hwloc_backend_enable	The bitmap API, 143
Components and Plugins: Discovery backends,	hwloc_bitmap_last_unset
193	The bitmap API, 143
hwloc_bitmap_allbut	hwloc_bitmap_list_asprintf
The bitmap API, 139 hwloc bitmap alloc	The bitmap API, 144 hwloc_bitmap_list_snprintf
The bitmap API, 139	The bitmap API, 144
hwloc bitmap alloc full	hwloc_bitmap_list_sscanf
The bitmap API, 139	The bitmap API, 144
hwloc bitmap and	hwloc bitmap next
The bitmap API, 139	The bitmap API, 144
hwloc bitmap andnot	hwloc bitmap next unset
The bitmap API, 139	The bitmap API, 144
hwloc_bitmap_asprintf	hwloc_bitmap_not
The bitmap API, 139	The bitmap API, 145
hwloc_bitmap_clr	hwloc_bitmap_nr_ulongs
The bitmap API, 140	The bitmap API, 145
hwloc_bitmap_clr_range	hwloc_bitmap_only
The bitmap API, 140	The bitmap API, 145
hwloc_bitmap_compare	hwloc_bitmap_or
The bitmap API, 140	The bitmap API, 145

hwloc_bitmap_set	Components and Plugins: Generic components,
The bitmap API, 145	194
hwloc_bitmap_set_ith_ulong	hwloc_component_type_e
The bitmap API, 145	Components and Plugins: Generic components,
hwloc_bitmap_set_range	194
The bitmap API, 146	hwloc_component_type_t
hwloc_bitmap_singlify	Components and Plugins: Generic components,
The bitmap API, 146	194
hwloc_bitmap_singlify_per_core	HWLOC_COMPONENT_TYPE_XML
Finding objects, miscellaneous helpers, 128	Components and Plugins: Generic components,
hwloc_bitmap_snprintf	194
The bitmap API, 146	hwloc_const_bitmap_t
hwloc_bitmap_sscanf	The bitmap API, 138
The bitmap API, 146	hwloc_const_cpuset_t
hwloc_bitmap_t	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
The bitmap API, 138	82
hwloc_bitmap_taskset_asprintf	hwloc_const_nodeset_t
The bitmap API, 146	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
hwloc_bitmap_taskset_snprintf	82
The bitmap API, 147	hwloc_cpubind_flags_t
hwloc bitmap taskset sscanf	CPU binding, 97
The bitmap API, 147	HWLOC_CPUBIND_NOMEMBIND
hwloc_bitmap_to_ith_ulong	CPU binding, 98
The bitmap API, 147	HWLOC_CPUBIND_PROCESS
hwloc_bitmap_to_ulong	CPU binding, 97
The bitmap API, 147	HWLOC_CPUBIND_STRICT
hwloc_bitmap_to_ulongs	CPU binding, 97
The bitmap API, 147	HWLOC_CPUBIND_THREAD
•	
hwloc_bitmap_weight	CPU binding, 97
The bitmap API, 148	hwloc_cpukinds_get_by_cpuset
hwloc_bitmap_xor	Kinds of CPU cores, 168
The bitmap API, 148	hwloc_cpukinds_get_info
hwloc_bitmap_zero	Kinds of CPU cores, 168
The bitmap API, 148	hwloc_cpukinds_get_nr
hwloc_bridge_covers_pcibus	Kinds of CPU cores, 168
Finding I/O objects, 135	hwloc_cpukinds_register
hwloc_cl_device_topology_amd, 206	Kinds of CPU cores, 169
bus, 207	hwloc_cpuset_from_glibc_sched_affinity
data, 207	Interoperability with glibc sched affinity, 174
device, 207	hwloc_cpuset_from_linux_libnuma_bitmask
function, 207	Interoperability with Linux libnuma bitmask, 172
pcie, 207	hwloc_cpuset_from_linux_libnuma_ulongs
raw, 207	Interoperability with Linux libnuma unsigned long
type, 207	masks, 171
unused, 207	hwloc_cpuset_from_nodeset
hwloc_compare_types	Converting between CPU sets and node sets, 134
Object Types, 86	hwloc_cpuset_t
hwloc_component, 208	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
abi, 208	82
data, 208	hwloc_cpuset_to_glibc_sched_affinity
finalize, 208	Interoperability with glibc sched affinity, 175
flags, 208	hwloc_cpuset_to_linux_libnuma_bitmask
init, 208	Interoperability with Linux libnuma bitmask, 172
type, 209	hwloc_cpuset_to_linux_libnuma_ulongs
HWLOC_COMPONENT_ABI	Interoperability with Linux libnuma unsigned long
API version, 81	masks, 171
HWLOC_COMPONENT_TYPE_DISC	hwloc_cpuset_to_nodeset
	Converting between CPU sets and node sets, 134

hwloc_cuda_get_device_cpuset	phase, 211
Interoperability with the CUDA Driver API, 177	hwloc_disc_status_flag_e
hwloc_cuda_get_device_osdev	Components and Plugins: Discovery backends,
Interoperability with the CUDA Driver API, 177	193
hwloc_cuda_get_device_osdev_by_index	HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_RESOURCES
Interoperability with the CUDA Driver API, 177	Components and Plugins: Discovery backends,
hwloc_cuda_get_device_pci_ids	193
Interoperability with the CUDA Driver API, 178	hwloc_distances_add_commit
hwloc_cuda_get_device_pcidev	Add distances between objects, 158
Interoperability with the CUDA Driver API, 178	hwloc_distances_add_create
hwloc_cudart_get_device_cpuset	Add distances between objects, 158
Interoperability with the CUDA Runtime API, 179	hwloc_distances_add_flag_e
hwloc_cudart_get_device_osdev_by_index	Add distances between objects, 158
Interoperability with the CUDA Runtime API, 179	HWLOC_DISTANCES_ADD_FLAG_GROUP
hwloc_cudart_get_device_pci_ids	Add distances between objects, 158
Interoperability with the CUDA Runtime API, 179	HWLOC_DISTANCES_ADD_FLAG_GROUP_INACCURATE
hwloc_cudart_get_device_pcidev	Add distances between objects, 158
Interoperability with the CUDA Runtime API, 179	hwloc_distances_add_handle_t
hwloc_disc_component, 209	Add distances between objects, 157
enabled_by_default, 209	hwloc_distances_add_values
excluded_phases, 209	Add distances between objects, 159
instantiate, 210	hwloc_distances_get
name, 210	Retrieve distances between objects, 154
phases, 210	hwloc_distances_get_by_depth
priority, 210	Retrieve distances between objects, 155
HWLOC_DISC_PHASE_ANNOTATE	hwloc_distances_get_by_name
Components and Plugins: Discovery backends,	Retrieve distances between objects, 155
193	hwloc_distances_get_by_type
HWLOC_DISC_PHASE_CPU	Retrieve distances between objects, 155
Components and Plugins: Discovery backends,	hwloc_distances_get_name
193	Retrieve distances between objects, 155
hwloc_disc_phase_e	hwloc_distances_kind_e
Components and Plugins: Discovery backends,	Retrieve distances between objects, 153
192	HWLOC_DISTANCES_KIND_FROM_OS
HWLOC_DISC_PHASE_GLOBAL	Retrieve distances between objects, 153
Components and Plugins: Discovery backends,	HWLOC_DISTANCES_KIND_FROM_USER
193	Retrieve distances between objects, 153
HWLOC_DISC_PHASE_IO	HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES
Components and Plugins: Discovery backends,	Retrieve distances between objects, 154
193	HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH
HWLOC_DISC_PHASE_MEMORY	Retrieve distances between objects, 154
Components and Plugins: Discovery backends,	HWLOC_DISTANCES_KIND_MEANS_LATENCY
193	Retrieve distances between objects, 153
HWLOC_DISC_PHASE_MISC	hwloc_distances_obj_index
Components and Plugins: Discovery backends,	Helpers for consulting distance matrices, 156
193	hwloc_distances_obj_pair_values
HWLOC_DISC_PHASE_PCI	Helpers for consulting distance matrices, 157
Components and Plugins: Discovery backends,	hwloc_distances_release
193	Retrieve distances between objects, 156
hwloc_disc_phase_t	hwloc_distances_release_remove
Components and Plugins: Discovery backends,	Remove distances between objects, 159
192	hwloc_distances_remove
HWLOC_DISC_PHASE_TWEAK	Remove distances between objects, 160
Components and Plugins: Discovery backends,	hwloc_distances_remove_by_depth
193	Remove distances between objects, 160
hwloc_disc_status, 210	hwloc_distances_remove_by_type
excluded_phases, 210	Remove distances between objects, 160
flags, 211	hwloc distances s. 211

kind, 211	hwloc_get_cpubind
nbobjs, 211	CPU binding, 98
objs, 212	hwloc_get_depth_type
values, 212	Object levels, depths and types, 91
hwloc_distances_transform	hwloc_get_first_largest_obj_inside_cpuset
Retrieve distances between objects, 156	Finding Objects inside a CPU set, 120
hwloc_distances_transform_e	hwloc_get_largest_objs_inside_cpuset
Retrieve distances between objects, 154	Finding Objects inside a CPU set, 121
HWLOC_DISTANCES_TRANSFORM_LINKS	hwloc_get_last_cpu_location
Retrieve distances between objects, 154	CPU binding, 98
HWLOC_DISTANCES_TRANSFORM_MERGE_SWITCH	I_lkv0bcTSget_local_numanode_objs
Retrieve distances between objects, 154	Comparing memory node attributes for finding
HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL	where to allocate on, 162
Retrieve distances between objects, 154	hwloc_get_membind
HWLOC_DISTANCES_TRANSFORM_TRANSITIVE_CLO	OSUR ™ emory binding, 105
Retrieve distances between objects, 154	hwloc_get_memory_parents_depth
hwloc_distrib	Object levels, depths and types, 91
Distributing items over a topology, 131	hwloc_get_nbobjs_by_depth
HWLOC_DISTRIB_FLAG_REVERSE	Object levels, depths and types, 91
Distributing items over a topology, 131	hwloc_get_nbobjs_by_type
hwloc distrib flags e	Object levels, depths and types, 91
Distributing items over a topology, 131	hwloc_get_nbobjs_inside_cpuset_by_depth
hwloc_export_obj_userdata	Finding Objects inside a CPU set, 121
Exporting Topologies to XML, 149	hwloc_get_nbobjs_inside_cpuset_by_type
hwloc_export_obj_userdata_base64	Finding Objects inside a CPU set, 121
Exporting Topologies to XML, 149	hwloc_get_next_bridge
hwloc_filter_check_keep_object	Finding I/O objects, 135
Components and Plugins: Filtering objects, 197	hwloc_get_next_child
hwloc_filter_check_keep_object_type	Looking at Ancestor and Child Objects, 125
Components and Plugins: Filtering objects, 197	hwloc_get_next_obj_by_depth
hwloc_filter_check_osdev_subtype_important	Object levels, depths and types, 91
Components and Plugins: Filtering objects, 197	hwloc_get_next_obj_by_type
hwloc filter check pcidev subtype important	Object levels, depths and types, 91
Components and Plugins: Filtering objects, 197	hwloc_get_next_obj_covering_cpuset_by_depth
hwloc_free	Finding Objects covering at least CPU set, 123
Memory binding, 104	hwloc_get_next_obj_covering_cpuset_by_type
hwloc_free_xmlbuffer	Finding Objects covering at least CPU set, 124
Exporting Topologies to XML, 149	hwloc_get_next_obj_inside_cpuset_by_depth
hwloc_get_ancestor_obj_by_depth	Finding Objects inside a CPU set, 121
Looking at Ancestor and Child Objects, 124	hwloc get next obj inside cpuset by type
hwloc_get_ancestor_obj_by_type	Finding Objects inside a CPU set, 122
Looking at Ancestor and Child Objects, 125	hwloc get next osdev
hwloc_get_api_version	Finding I/O objects, 135
API version, 81	hwloc_get_next_pcidev
hwloc_get_area_membind	Finding I/O objects, 135
Memory binding, 104	hwloc get non io ancestor obj
hwloc_get_area_memlocation	Finding I/O objects, 136
Memory binding, 104	hwloc get numanode obj by os index
hwloc_get_cache_covering_cpuset	Finding objects, miscellaneous helpers, 129
Looking at Cache Objects, 127	hwloc_get_obj_below_array_by_type
hwloc_get_cache_type_depth	Finding objects, miscellaneous helpers, 129
Looking at Cache Objects, 128	hwloc_get_obj_below_by_type
hwloc_get_child_covering_cpuset	Finding objects, miscellaneous helpers, 130
Finding Objects covering at least CPU set, 123	hwloc_get_obj_by_depth
hwloc_get_closest_objs	Object levels, depths and types, 92
Finding objects, miscellaneous helpers, 129	hwloc_get_obj_by_type
hwloc_get_common_ancestor_obj	Object levels, depths and types, 92
Looking at Ancestor and Child Objects, 125	hwloc_get_obj_covering_cpuset

Finding Objects covering at least CPU set, 124	Interoperability with the oneAPI Level Zero inter-
hwloc_get_obj_index_inside_cpuset	face., 182
Finding Objects inside a CPU set, 122	hwloc_levelzero_get_device_osdev
hwloc_get_obj_inside_cpuset_by_depth	Interoperability with the oneAPI Level Zero inter-
Finding Objects inside a CPU set, 122	face., 183
hwloc_get_obj_inside_cpuset_by_type	hwloc_linux_get_tid_cpubind
Finding Objects inside a CPU set, 122	Linux-specific helpers, 170
hwloc_get_obj_with_same_locality	hwloc_linux_get_tid_last_cpu_location
Finding objects, miscellaneous helpers, 130	Linux-specific helpers, 170
hwloc_get_pcidev_by_busid	hwloc_linux_read_path_as_cpumask
Finding I/O objects, 136	Linux-specific helpers, 170
hwloc_get_pcidev_by_busidstring	hwloc_linux_set_tid_cpubind
Finding I/O objects, 136	Linux-specific helpers, 170
hwloc_get_proc_cpubind	HWLOC_LOCAL_NUMANODE_FLAG_ALL
CPU binding, 98	Comparing memory node attributes for finding
hwloc_get_proc_last_cpu_location	where to allocate on, 162
CPU binding, 98	hwloc_local_numanode_flag_e
hwloc_get_proc_membind	Comparing memory node attributes for finding
Memory binding, 105	where to allocate on, 161
hwloc_get_pu_obj_by_os_index	HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY
Finding objects, miscellaneous helpers, 131	Comparing memory node attributes for finding
hwloc_get_root_obj	where to allocate on, 161 HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY
Object levels, depths and types, 92 hwloc_get_shared_cache_covering_obj	Comparing memory node attributes for finding
Looking at Cache Objects, 128	
hwloc_get_thread_cpubind	where to allocate on, 161 hwloc_location, 213
CPU binding, 99	location, 214
hwloc_get_type_depth	type, 214
Object levels, depths and types, 92	hwloc_location::hwloc_location_u, 214
hwloc_get_type_depth_e	cpuset, 214
Object levels, depths and types, 90	object, 214
hwloc_get_type_or_above_depth	HWLOC_LOCATION_TYPE_CPUSET
Object levels, depths and types, 92	Comparing memory node attributes for finding
hwloc_get_type_or_below_depth	where to allocate on, 162
Object levels, depths and types, 93	hwloc_location_type_e
hwloc_gl_get_display_by_osdev	Comparing memory node attributes for finding
Interoperability with OpenGL displays, 183	where to allocate on, 162
hwloc_gl_get_display_osdev_by_name	HWLOC_LOCATION_TYPE_OBJECT
Interoperability with OpenGL displays, 184	Comparing memory node attributes for finding
hwloc_gl_get_display_osdev_by_port_device	where to allocate on, 162
Interoperability with OpenGL displays, 184	hwloc_memattr_flag_e
hwloc_hide_errors	Managing memory attributes, 165
Components and Plugins: Core functions to be	HWLOC_MEMATTR_FLAG_HIGHER_FIRST
used by components, 195	Managing memory attributes, 165
hwloc_ibv_get_device_cpuset	HWLOC_MEMATTR_FLAG_LOWER_FIRST
Interoperability with OpenFabrics, 185	Managing memory attributes, 165
hwloc_ibv_get_device_osdev	HWLOC_MEMATTR_FLAG_NEED_INITIATOR
Interoperability with OpenFabrics, 185	Managing memory attributes, 165
hwloc_ibv_get_device_osdev_by_name	hwloc_memattr_get_best_initiator
Interoperability with OpenFabrics, 185	Comparing memory node attributes for finding
hwloc_info_s, 213	where to allocate on, 163
name, 213	hwloc_memattr_get_best_target
value, 213	Comparing memory node attributes for finding
hwloc_insert_object_by_parent	where to allocate on, 163
Components and Plugins: Core functions to be	hwloc_memattr_get_by_name
used by components, 195	Comparing memory node attributes for finding
hwloc_levelzero_get_device_cpuset	where to allocate on, 164
	hwloc_memattr_get_flags

Managing memory attributes, 165	HWLOC_MEMBIND_THREAD
hwloc_memattr_get_initiators	Memory binding, 102
Managing memory attributes, 165	hwloc_nodeset_from_linux_libnuma_bitmask
hwloc_memattr_get_name	Interoperability with Linux libnuma bitmask, 173
Managing memory attributes, 166	hwloc_nodeset_from_linux_libnuma_ulongs
hwloc_memattr_get_targets	Interoperability with Linux libnuma unsigned long
Managing memory attributes, 166	masks, 171
hwloc_memattr_get_value	hwloc_nodeset_t
Comparing memory node attributes for findin where to allocate on, 164	g Object Sets (hwloc_cpuset_t and hwloc_nodeset_t) 82
HWLOC MEMATTR ID BANDWIDTH	hwloc_nodeset_to_linux_libnuma_bitmask
Comparing memory node attributes for findin	
where to allocate on, 162	hwloc_nodeset_to_linux_libnuma_ulongs
HWLOC_MEMATTR_ID_CAPACITY	Interoperability with Linux libnuma unsigned long
Comparing memory node attributes for findin	
where to allocate on, 162	hwloc_nvml_get_device_cpuset
hwloc_memattr_id_e	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for findin	
where to allocate on, 162	hwloc nvml get device osdev
HWLOC_MEMATTR_ID_LATENCY	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for findin	
where to allocate on, 162	hwloc_nvml_get_device_osdev_by_index
HWLOC_MEMATTR_ID_LOCALITY	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for findin	
where to allocate on, 162	hwloc_obj, 216
hwloc_memattr_id_t	arity, 217
Comparing memory node attributes for findin	g attr, 217
where to allocate on, 161	children, 217
hwloc_memattr_register	complete_cpuset, 217
Managing memory attributes, 166	complete_nodeset, 217
hwloc_memattr_set_value	cpuset, 217
Managing memory attributes, 167	depth, 218
HWLOC_MEMBIND_BIND	first_child, 218
Memory binding, 102	gp_index, 218
HWLOC_MEMBIND_BYNODESET	infos, 218
Memory binding, 102	infos_count, 218
HWLOC_MEMBIND_DEFAULT	io_arity, 218
Memory binding, 102	io_first_child, 218
HWLOC_MEMBIND_FIRSTTOUCH	last_child, 219
Memory binding, 102	logical_index, 219
hwloc_membind_flags_t	memory_arity, 219
Memory binding, 101	memory_first_child, 219
HWLOC_MEMBIND_INTERLEAVE	misc_arity, 219
Memory binding, 103	misc_first_child, 219
HWLOC_MEMBIND_MIGRATE	name, 219
Memory binding, 102	next_cousin, 219
HWLOC_MEMBIND_MIXED	next_sibling, 219
Memory binding, 103	nodeset, 220
HWLOC_MEMBIND_NEXTTOUCH	os_index, 220
Memory binding, 103 HWLOC_MEMBIND_NOCPUBIND	parent, 220
Memory binding, 102	prev_cousin, 220 prev_sibling, 220
hwloc_membind_policy_t	sibling_rank, 220
Memory binding, 102	subtype, 220
HWLOC_MEMBIND_PROCESS	subtype, 220 symmetric_subtree, 221
Memory binding, 102	total_memory, 221
HWLOC_MEMBIND_STRICT	type, 221
Memory binding, 102	userdata, 221
withing, building, toe	4001 data, <u></u> 1

hwloc_obj_add_children_sets	subvendor_id, 224
Components and Plugins: Core functions to be	vendor id, 224
used by components, 196	HWLOC_OBJ_BRIDGE
hwloc_obj_add_info	Object Types, 86
Consulting and Adding Key-Value Info Attributes, 95	HWLOC_OBJ_BRIDGE_HOST
hwloc_obj_add_other_obj_sets	Object Types, 84
Modifying a loaded Topology, 118	HWLOC_OBJ_BRIDGE_PCI
hwloc_obj_attr_snprintf	Object Types, 84
Converting between Object Types and Attributes,	hwloc_obj_bridge_type_e
and Strings, 93	Object Types, 84
hwloc_obj_attr_u, 221	hwloc_obj_bridge_type_t
bridge, 222	Object Types, 83
cache, 222	HWLOC_OBJ_CACHE_DATA
group, 222	Object Types, 84
numanode, 222	HWLOC_OBJ_CACHE_INSTRUCTION
osdev, 222	Object Types, 84
pcidev, 222	hwloc_obj_cache_type_e
hwloc_obj_attr_u::hwloc_bridge_attr_s, 204	Object Types, 84
depth, 205	hwloc_obj_cache_type_t
domain, 205	Object Types, 83
downstream, 205	HWLOC_OBJ_CACHE_UNIFIED
downstream_type, 205	Object Types, 84
pci, 205	HWLOC_OBJ_CORE
secondary_bus, 205	Object Types, 85
subordinate_bus, 205	HWLOC_OBJ_DIE
upstream, 205	Object Types, 86
upstream_type, 205	hwloc_obj_get_info_by_name
hwloc_obj_attr_u::hwloc_cache_attr_s, 206	Consulting and Adding Key-Value Info Attributes, 96
associativity, 206	HWLOC_OBJ_GROUP
depth, 206	Object Types, 85
linesize, 206	hwloc_obj_is_in_subtree
size, 206	Looking at Ancestor and Child Objects, 125
type, 206	HWLOC_OBJ_L1CACHE
hwloc_obj_attr_u::hwloc_group_attr_s, 212	Object Types, 85
depth, 212	HWLOC_OBJ_L1ICACHE
dont_merge, 212	Object Types, 85
kind, 212	HWLOC_OBJ_L2CACHE
subkind, 212	Object Types, 85
hwloc_obj_attr_u::hwloc_numanode_attr_s, 215	HWLOC_OBJ_L2ICACHE
local_memory, 215	Object Types, 85
page_types, 215	HWLOC OBJ L3CACHE
page_types_len, 215	Object Types, 85
hwloc obj attr u::hwloc numanode attr s::hwloc memo	
214	Object Types, 85
count, 215	HWLOC OBJ L4CACHE
size, 215	Object Types, 85
hwloc_obj_attr_u::hwloc_osdev_attr_s, 222	HWLOC_OBJ_L5CACHE
type, 222	Object Types, 85
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 223	HWLOC_OBJ_MACHINE
bus, 223	Object Types, 85
class_id, 223	HWLOC_OBJ_MEMCACHE
dev, 223	Object Types, 86
device_id, 223	HWLOC OBJ MISC
domain, 223	Object Types, 86
func, 223	HWLOC_OBJ_NUMANODE
linkspeed, 224	Object Types, 85
revision, 224	HWLOC_OBJ_OS_DEVICE
subdevice id, 224	Object Types, 86

HWLOC_OBJ_OSDEV_BLOCK	hwloc_pcidisc_check_bridge_type
Object Types, 84	Components and Plugins: helpers for PCI discov-
HWLOC_OBJ_OSDEV_COPROC	ery, 198
Object Types, 84	hwloc_pcidisc_find_bridge_buses
HWLOC_OBJ_OSDEV_DMA	Components and Plugins: helpers for PCI discov-
Object Types, 84	ery, 198
HWLOC_OBJ_OSDEV_GPU	hwloc_pcidisc_find_cap
Object Types, 84	Components and Plugins: helpers for PCI discov-
HWLOC_OBJ_OSDEV_NETWORK	ery, 198
Object Types, 84	hwloc_pcidisc_find_linkspeed
HWLOC_OBJ_OSDEV_OPENFABRICS	Components and Plugins: helpers for PCI discov-
Object Types, 84	ery, 198
hwloc_obj_osdev_type_e	hwloc_pcidisc_tree_attach
Object Types, 84	Components and Plugins: helpers for PCI discov-
hwloc_obj_osdev_type_t	ery, 198
Object Types, 83	hwloc_pcidisc_tree_insert_by_busid
HWLOC OBJ PACKAGE	Components and Plugins: helpers for PCI discov-
Object Types, 85	ery, 199
HWLOC_OBJ_PCI_DEVICE	hwloc_plugin_check_namespace
Object Types, 86	Components and Plugins: Core functions to be
HWLOC_OBJ_PU	used by components, 196
Object Types, 85	HWLOC_RESTRICT_FLAG_ADAPT_IO
hwloc_obj_t	Modifying a loaded Topology, 117
Object Structure and Attributes, 87	HWLOC_RESTRICT_FLAG_ADAPT_MISC
hwloc_obj_type_is_cache	Modifying a loaded Topology, 117
	HWLOC_RESTRICT_FLAG_BYNODESET
Kinds of object Type, 126	
hwloc_obj_type_is_dcache	Modifying a loaded Topology, 117
Kinds of object Type, 126	HWLOC_RESTRICT_FLAG_REMOVE_CPULESS
hwloc_obj_type_is_icache	Modifying a loaded Topology, 117
Kinds of object Type, 126	HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS
hwloc_obj_type_is_io	Modifying a loaded Topology, 117
Kinds of object Type, 126	hwloc_restrict_flags_e
hwloc_obj_type_is_memory	Modifying a loaded Topology, 117
Kinds of object Type, 127	hwloc_rsmi_get_device_cpuset
hwloc_obj_type_is_normal	Interoperability with the ROCm SMI Management
Kinds of object Type, 127	Library, 181
hwloc_obj_type_snprintf	hwloc_rsmi_get_device_osdev
Converting between Object Types and Attributes,	Interoperability with the ROCm SMI Management
and Strings, 94	Library, 181
hwloc_obj_type_string	hwloc_rsmi_get_device_osdev_by_index
Converting between Object Types and Attributes,	Interoperability with the ROCm SMI Management
and Strings, 94	Library, 182
hwloc_obj_type_t	hwloc_set_area_membind
Object Types, 84	Memory binding, 105
hwloc_opencl_get_device_cpuset	hwloc_set_cpubind
Interoperability with OpenCL, 175	CPU binding, 99
hwloc_opencl_get_device_osdev	hwloc_set_membind
Interoperability with OpenCL, 175	Memory binding, 106
hwloc_opencl_get_device_osdev_by_index	hwloc_set_proc_cpubind
Interoperability with OpenCL, 176	CPU binding, 99
hwloc_opencl_get_device_pci_busid	hwloc_set_proc_membind
Interoperability with OpenCL, 176	Memory binding, 106
hwloc_pci_find_by_busid	hwloc_set_thread_cpubind
Components and Plugins: finding PCI objects dur-	CPU binding, 100
ing other discoveries, 200	hwloc_shmem_topology_adopt
hwloc_pci_find_parent_by_busid	Sharing topologies between processes, 190
Components and Plugins: finding PCI objects dur-	hwloc_shmem_topology_get_length
ing other discoveries, 200	Sharing topologies between processes, 191

hwloc_shmem_topology_write	hwloc_topology_diff_obj_attr_u, 228
Sharing topologies between processes, 191	generic, 228
hwloc topology abi check	string, 228
Topology Creation and Destruction, 88	uint64, 228
hwloc_topology_alloc_group_object	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s,
Modifying a loaded Topology, 118	226
hwloc_topology_allow	type, 226
Modifying a loaded Topology, 118	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_check	227
Topology Creation and Destruction, 88	name, 227
HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKL	IST newvalue, 228
Changing the Source of Topology Discovery, 107	oldvalue, 228
hwloc_topology_components_flag_e	type, 228
Changing the Source of Topology Discovery, 107	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s,
hwloc_topology_cpubind_support, 224	229
get_proc_cpubind, 224	index, 229
get_proc_last_cpu_location, 225	newvalue, 229
get_thisproc_cpubind, 225	oldvalue, 229
get_thisproc_last_cpu_location, 225	type, 229
get_thisthread_cpubind, 225	hwloc_topology_diff_t
get_thisthread_last_cpu_location, 225	Topology differences, 186
get_thread_cpubind, 225	HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX
set_proc_cpubind, 225	Topology differences, 187
set_thisproc_cpubind, 225	hwloc_topology_diff_type_e
set_thisthread_cpubind, 225	Topology differences, 187
set_thread_cpubind, 225	hwloc_topology_diff_type_t
hwloc_topology_destroy	Topology differences, 187
Topology Creation and Destruction, 88	hwloc_topology_diff_u, 230
hwloc_topology_diff_apply	generic, 230
Topology differences, 188	obj_attr, 231
hwloc_topology_diff_apply_flags_e	too_complex, 231
Topology differences, 187	hwloc_topology_diff_u::hwloc_topology_diff_generic_s,
HWLOC_TOPOLOGY_DIFF_APPLY_REVERSE	226
Topology differences, 187	next, 226
hwloc_topology_diff_build	type, 226
Topology differences, 188	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
hwloc_topology_diff_destroy	226
Topology differences, 188	diff, 227
hwloc_topology_diff_export_xml	next, 227
Topology differences, 188	obj_depth, 227
hwloc_topology_diff_export_xmlbuffer	obj_index, 227
Topology differences, 189	type, 227
hwloc_topology_diff_load_xml	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
Topology differences, 189	229
hwloc_topology_diff_load_xmlbuffer	next, 230
Topology differences, 189	obj_depth, 230
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR	obj_index, 230
Topology differences, 187	type, 230
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO	hwloc_topology_discovery_support, 231
Topology differences, 187	cpukind_efficiency, 231
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_NAME	disallowed_numa, 231
Topology differences, 187	disallowed_pu, 231
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE	numa, 231
Topology differences, 187	numa_memory, 232
hwloc_topology_diff_obj_attr_type_e	pu, 232
Topology differences, 187	hwloc_topology_dup
hwloc_topology_diff_obj_attr_type_t	Topology Creation and Destruction, 88
Topology differences, 186	hwloc_topology_export_synthetic

	Tanalagy Creation and Destruction CO
Exporting Topologies to Synthetic, 152	Topology Creation and Destruction, 89
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_IG	
Exporting Topologies to Synthetic, 152	Modifying a loaded Topology, 118
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO	
Exporting Topologies to Synthetic, 152	Modifying a loaded Topology, 119
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO	
Exporting Topologies to Synthetic, 152	Topology Detection Configuration and Query, 115
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_V	l hwloc_topology_load
Exporting Topologies to Synthetic, 152	Topology Creation and Destruction, 89
hwloc_topology_export_synthetic_flags_e	hwloc_topology_membind_support, 232
Exporting Topologies to Synthetic, 151	alloc_membind, 232
hwloc_topology_export_xml	bind_membind, 232
Exporting Topologies to XML, 150	firsttouch_membind, 233
HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1	get_area_membind, 233
Exporting Topologies to XML, 149	get_area_memlocation, 233
hwloc_topology_export_xml_flags_e	get_proc_membind, 233
Exporting Topologies to XML, 148	get_thisproc_membind, 233
hwloc topology export xmlbuffer	get_thisthread_membind, 233
Exporting Topologies to XML, 150	interleave_membind, 233
HWLOC TOPOLOGY FLAG DONT CHANGE BINDING	
Topology Detection Configuration and Query, 113	nexttouch membind, 233
HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT	set_area_membind, 233
Topology Detection Configuration and Query, 112	set_proc_membind, 233
HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED	set_thisproc_membind, 233
Topology Detection Configuration and Query, 110	set_thisthread_membind, 234
HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM	hwloc_topology_misc_support, 234
Topology Detection Configuration and Query, 111	imported_support, 234
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINE	
Topology Detection Configuration and Query, 112	Components and Plugins: Core functions to be
HWLOC TOPOLOGY FLAG RESTRICT TO MEMBINI	
Topology Detection Configuration and Query, 113	hwloc_topology_refresh
	nwide_topology_remean
	RESMINER a loaded Topology 110
	_RES OlderOre ® a loaded Topology, 119
Topology Detection Configuration and Query, 111	hwloc_topology_restrict
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e	hwloc_topology_restrict Modifying a loaded Topology, 119
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset CPU and node sets of entire topologies, 134	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset CPU and node sets of entire topologies, 134 hwloc_topology_get_type_filter	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata Topology Detection Configuration and Query, 116
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset CPU and node sets of entire topologies, 134 hwloc_topology_get_type_filter Topology Detection Configuration and Query, 114	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata_export_callback
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset CPU and node sets of entire topologies, 134 hwloc_topology_get_type_filter Topology Detection Configuration and Query, 114 hwloc_topology_get_userdata	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata_export_callback Exporting Topologies to XML, 150
Topology Detection Configuration and Query, 111 hwloc_topology_flags_e Topology Detection Configuration and Query, 110 hwloc_topology_get_allowed_cpuset CPU and node sets of entire topologies, 132 hwloc_topology_get_allowed_nodeset CPU and node sets of entire topologies, 132 hwloc_topology_get_complete_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_complete_nodeset CPU and node sets of entire topologies, 133 hwloc_topology_get_depth Object levels, depths and types, 93 hwloc_topology_get_flags Topology Detection Configuration and Query, 114 hwloc_topology_get_support Topology Detection Configuration and Query, 114 hwloc_topology_get_topology_cpuset CPU and node sets of entire topologies, 133 hwloc_topology_get_topology_nodeset CPU and node sets of entire topologies, 134 hwloc_topology_get_type_filter Topology Detection Configuration and Query, 114	hwloc_topology_restrict Modifying a loaded Topology, 119 hwloc_topology_set_all_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_cache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_components Changing the Source of Topology Discovery, 107 hwloc_topology_set_flags Topology Detection Configuration and Query, 115 hwloc_topology_set_icache_types_filter Topology Detection Configuration and Query, 115 hwloc_topology_set_io_types_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_pid Changing the Source of Topology Discovery, 107 hwloc_topology_set_synthetic Changing the Source of Topology Discovery, 108 hwloc_topology_set_type_filter Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata Topology Detection Configuration and Query, 116 hwloc_topology_set_userdata_export_callback

hwloc_topology_set_xml	init
Changing the Source of Topology Discovery, 108	hwloc_component, 208
hwloc_topology_set_xmlbuffer	instantiate
Changing the Source of Topology Discovery, 109	hwloc_disc_component, 210
hwloc_topology_support, 234	interleave_membind
cpubind, 234	hwloc_topology_membind_support, 233
discovery, 235	Interoperability with glibc sched affinity, 174
membind, 235	hwloc_cpuset_from_glibc_sched_affinity, 174
misc, 235	hwloc cpuset to glibc sched affinity, 175
hwloc_topology_t	Interoperability with Linux libnuma bitmask, 172
Topology Creation and Destruction, 87	hwloc cpuset from linux libnuma bitmask, 172
HWLOC_TYPE_DEPTH_BRIDGE	hwloc_cpuset_to_linux_libnuma_bitmask, 172
Object levels, depths and types, 90	hwloc_nodeset_from_linux_libnuma_bitmask, 173
HWLOC_TYPE_DEPTH_MEMCACHE	hwloc_nodeset_to_linux_libnuma_bitmask, 173
Object levels, depths and types, 90	Interoperability with Linux libnuma unsigned long masks,
HWLOC_TYPE_DEPTH_MISC	171
Object levels, depths and types, 90	hwloc_cpuset_from_linux_libnuma_ulongs, 171
HWLOC_TYPE_DEPTH_MULTIPLE	hwloc cpuset to linux libnuma ulongs, 171
Object levels, depths and types, 90	hwloc nodeset from linux libnuma ulongs, 171
HWLOC_TYPE_DEPTH_NUMANODE	hwloc_nodeset_to_linux_libnuma_ulongs, 172
Object levels, depths and types, 90	Interoperability with OpenCL, 175
HWLOC_TYPE_DEPTH_OS_DEVICE	hwloc_opencl_get_device_cpuset, 175
Object levels, depths and types, 90	hwloc_opencl_get_device_osdev, 175
HWLOC_TYPE_DEPTH_PCI_DEVICE	- ·
	hwloc_opencl_get_device_osdev_by_index, 176
Object levels, depths and types, 90	hwloc_opencl_get_device_pci_busid, 176
HWLOC_TYPE_DEPTH_UNKNOWN	Interoperability with OpenFabrics, 184
Object levels, depths and types, 90	hwloc_ibv_get_device_cpuset, 185
hwloc_type_filter_e	hwloc_ibv_get_device_osdev, 185
Topology Detection Configuration and Query, 113	hwloc_ibv_get_device_osdev_by_name, 185
HWLOC_TYPE_FILTER_KEEP_ALL Tanalogy Potentian Configuration and Overv 112	Interoperability with OpenGL displays, 183
Topology Detection Configuration and Query, 113	hwloc_gl_get_display_by_osdev, 183
HWLOC_TYPE_FILTER_KEEP_IMPORTANT Tanglery Potentian Configuration and Overs 114	hwloc_gl_get_display_osdev_by_name, 184
Topology Detection Configuration and Query, 114	hwloc_gl_get_display_osdev_by_port_device, 184
HWLOC_TYPE_FILTER_KEEP_NONE Topology Detection Configuration and Query, 113	Interoperability with the CUDA Driver API, 177
HWLOC_TYPE_FILTER_KEEP_STRUCTURE	hwloc_cuda_get_device_cpuset, 177
Topology Detection Configuration and Query, 114	hwloc_cuda_get_device_osdev, 177
, ,,	hwloc_cuda_get_device_osdev_by_index, 177 hwloc_cuda_get_device_pci_ids, 178
hwloc_type_sscanf	
Converting between Object Types and Attributes,	hwloc_cuda_get_device_pcidev, 178
and Strings, 94	Interoperability with the CUDA Runtime API, 178
hwloc_type_sscanf_as_depth	hwloc_cudart_get_device_cpuset, 179
Converting between Object Types and Attributes,	hwloc_cudart_get_device_osdev_by_index, 179
and Strings, 95	hwloc_cudart_get_device_pci_ids, 179
HWLOC_TYPE_UNORDERED	hwloc_cudart_get_device_pcidev, 179
Object Types, 83	Interoperability with the NVIDIA Management Library,
hwloc_windows_get_nr_processor_groups	180
Windows-specific helpers, 173	hwloc_nvml_get_device_cpuset, 180
hwloc_windows_get_processor_group_cpuset	hwloc_nvml_get_device_osdev, 180
Windows-specific helpers, 174	hwloc_nvml_get_device_osdev_by_index, 180
imported_support	Interoperability with the oneAPI Level Zero interface., 182
hwloc_topology_misc_support, 234	
index	hwloc_levelzero_get_device_cpuset, 182
	hwloc_levelzero_get_device_osdev, 183 _hrieroperalbility_with the ROCm SMI Management Li-
229	
infos	brary, 181
hwloc_obj, 218	hwloc_rsmi_get_device_cpuset, 181 hwloc_rsmi_get_device_osdev, 181
infos_count	hwloc_rsmi_get_device_osdev_by_index, 182
hwloc_obj, 218	maioc_tomi_get_device_oodev_by_maex, 102

io_arity	hwloc_memattr_get_name, 166
hwloc_obj, 218	hwloc_memattr_get_targets, 166
io_first_child	hwloc_memattr_register, 166
hwloc_obj, 218	hwloc_memattr_set_value, 167
is_thissystem	membind
hwloc_backend, 204	hwloc_topology_support, 235
	Memory binding, 100
kind	hwloc_alloc, 103
hwloc_distances_s, 211	hwloc_alloc_membind, 103
hwloc_obj_attr_u::hwloc_group_attr_s, 212	hwloc_alloc_membind_policy, 103
Kinds of CPU cores, 167	hwloc_free, 104
hwloc_cpukinds_get_by_cpuset, 168	hwloc_get_area_membind, 104
hwloc_cpukinds_get_info, 168	hwloc_get_area_memlocation, 104
hwloc_cpukinds_get_nr, 168	hwloc_get_membind, 105
hwloc_cpukinds_register, 169	hwloc_get_proc_membind, 105
Kinds of object Type, 126	HWLOC_MEMBIND_BIND, 102
hwloc_obj_type_is_cache, 126	HWLOC_MEMBIND_BYNODESET, 102
hwloc_obj_type_is_dcache, 126	HWLOC MEMBIND DEFAULT, 102
hwloc_obj_type_is_icache, 126	HWLOC_MEMBIND_FIRSTTOUCH, 102
hwloc_obj_type_is_io, 126	hwloc_membind_flags_t, 101
hwloc_obj_type_is_memory, 127	HWLOC_MEMBIND_INTERLEAVE, 103
hwloc_obj_type_is_normal, 127	HWLOC_MEMBIND_MIGRATE, 102
- <i>-</i>	HWLOC_MEMBIND_MIXED, 103
last_child	HWLOC_MEMBIND_NEXTTOUCH, 103
hwloc_obj, 219	HWLOC_MEMBIND_NOCPUBIND, 102
linesize	hwloc_membind_policy_t, 102
hwloc_obj_attr_u::hwloc_cache_attr_s, 206	HWLOC_MEMBIND_PROCESS, 102
linkspeed	HWLOC_MEMBIND_STRICT, 102
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 224	HWLOC_MEMBIND_THREAD, 102
Linux-specific helpers, 169	hwloc_set_area_membind, 105
hwloc_linux_get_tid_cpubind, 170	hwloc_set_membind, 106
hwloc_linux_get_tid_last_cpu_location, 170	hwloc_set_proc_membind, 106
hwloc_linux_read_path_as_cpumask, 170	memory_arity
hwloc_linux_set_tid_cpubind, 170	• — •
local_memory	hwloc_obj, 219
hwloc_obj_attr_u::hwloc_numanode_attr_s, 215	memory_first_child
location	hwloc_obj, 219
hwloc_location, 214	migrate_membind
logical_index	hwloc_topology_membind_support, 233
hwloc obj, 219	misc
Looking at Ancestor and Child Objects, 124	hwloc_topology_support, 235
hwloc get ancestor obj by depth, 124	misc_arity
hwloc_get_ancestor_obj_by_type, 125	hwloc_obj, 219
hwloc_get_common_ancestor_obj, 125	misc_first_child
hwloc_get_next_child, 125	hwloc_obj, 219
hwloc_obj_is_in_subtree, 125	Modifying a loaded Topology, 116
Looking at Cache Objects, 127	HWLOC_ALLOW_FLAG_ALL, 117
hwloc_get_cache_covering_cpuset, 127	HWLOC_ALLOW_FLAG_CUSTOM, 117
hwloc_get_cache_type_depth, 128	HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS
hwloc_get_shared_cache_covering_obj, 128	117
nwioc_get_shared_cache_covering_obj, 120	hwloc_allow_flags_e, 117
Managing memory attributes, 164	hwloc_obj_add_other_obj_sets, 118
hwloc_memattr_flag_e, 165	HWLOC_RESTRICT_FLAG_ADAPT_IO, 117
HWLOC_MEMATTR_FLAG_HIGHER_FIRST, 165	HWLOC_RESTRICT_FLAG_ADAPT_MISC, 117
HWLOC_MEMATTR_FLAG_LOWER_FIRST, 165	HWLOC_RESTRICT_FLAG_BYNODESET, 117
HWLOC_MEMATTR_FLAG_NEED_INITIATOR,	HWLOC_RESTRICT_FLAG_REMOVE_CPULESS,
165	117
hwloc_memattr_get_flags, 165	HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS,
hwloc memattr get initiators, 165	117
momati got miliatoro, 100	

	hwloc_restrict_flags_e, 117	next_c	cousin
	hwloc_topology_alloc_group_object, 118	h	nwloc_obj, 219
	hwloc_topology_allow, 118	next_s	sibling
	hwloc_topology_insert_group_object, 118	h	nwloc_obj, 219
	hwloc_topology_insert_misc_object, 119	nextto	ouch_membind
	hwloc_topology_refresh, 119		nwloc topology membind support, 233
	hwloc_topology_restrict, 119	nodes	• •
			nwloc_obj, 220
name		numa	_ ·
	hwloc_disc_component, 210		nwloc_topology_discovery_support, 231
	hwloc_info_s, 213		_memory
	hwloc_obj, 219		nwloc_topology_discovery_support, 232
	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_	obi _m at	ttk.string s.
	227		
nbob		1	nwloc_obj_attr_u, 222
	hwloc_distances_s, 211	obj_at	ttr
	c API, 201		nwloc_topology_diff_u, 231
	NETLOC_ERROR, 201	obj_de	
	NETLOC_ERROR_EMPTY, 201		nwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
	NETLOC_ERROR_EXISTS, 201		227
	NETLOC_ERROR_EXISTS, 201 NETLOC_ERROR_MAX, 201	h	
		- 1	nwloc_topology_diff_u::hwloc_topology_diff_too_complex_s
	NETLOC_ERROR_MULTIPLE, 201	-1-1-1	230
	NETLOC_ERROR_NOENT, 201	obj_in	
	NETLOC_ERROR_NOT_FOUND, 201	h	nwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
	NETLOC_ERROR_NOT_IMPL, 201		227
	NETLOC_ERROR_NOTDIR, 201	h	nwloc_topology_diff_u::hwloc_topology_diff_too_complex_s
	NETLOC_SUCCESS, 201		230
NETI	LOC_ERROR	object	t end of the control
	Netloc API, 201	h	nwloc_location::hwloc_location_u, 214
NETI	LOC_ERROR_EMPTY	Objec	t levels, depths and types, 90
	Netloc API, 201	h	nwloc_get_depth_type, 91
NETI	LOC_ERROR_EXISTS	h	nwloc_get_memory_parents_depth, 91
	Netloc API, 201		nwloc_get_nbobjs_by_depth, 91
	_OC_ERROR_MAX		nwloc_get_nbobjs_by_type, 91
	Netloc API, 201		nwloc_get_next_obj_by_depth, 91
	LOC_ERROR_MULTIPLE		nwloc_get_next_obj_by_type, 91
	Netloc API, 201		nwloc_get_obj_by_depth, 92
	LOC_ERROR_NOENT		nwloc_get_obj_by_type, 92
	Netloc API, 201		nwloc_get_root_obj, 92
	LOC_ERROR_NOT_FOUND		nwloc_get_type_depth, 92
	Netloc API, 201		nwloc_get_type_depth_e, 90
	LOC_ERROR_NOT_IMPL		nwloc_get_type_or_above_depth, 92
	Netloc API, 201		nwloc_get_type_or_below_depth, 93
	LOC_ERROR_NOTDIR		nwloc_topology_get_depth, 93
	Netloc API, 201		HWLOC_TYPE_DEPTH_BRIDGE, 90
	LOC_SUCCESS		HWLOC_TYPE_DEPTH_MEMCACHE, 90
	Netloc API, 201		HWLOC_TYPE_DEPTH_MISC, 90
newv			HWLOC_TYPE_DEPTH_MULTIPLE, 90
	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_		
	228		HWLOC_TYPE_DEPTH_OS_DEVICE, 90
	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_		
	229	H	HWLOC_TYPE_DEPTH_UNKNOWN, 90
next		Objec	t Sets (hwloc_cpuset_t and hwloc_nodeset_t), 82
	hwloc_topology_diff_u::hwloc_topology_diff_generic_	_s, h	nwloc_const_cpuset_t, 82
	226		nwloc_const_nodeset_t, 82
	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_		nwloc_cpuset_t, 82
	227		nwloc_nodeset_t, 82
	hwloc_topology_diff_u::hwloc_topology_diff_too_com		
	230		nwloc_obj_t, 87
			— <i></i>

Object Types, 82	pci
hwloc_compare_types, 86	hwloc_obj_attr_u::hwloc_bridge_attr_s, 205
HWLOC_OBJ_BRIDGE, 86	pcidev
HWLOC_OBJ_BRIDGE_HOST, 84	hwloc_obj_attr_u, 222
HWLOC_OBJ_BRIDGE_PCI, 84	pcie
hwloc_obj_bridge_type_e, 84	hwloc_cl_device_topology_amd, 207
hwloc_obj_bridge_type_t, 83	phase
HWLOC_OBJ_CACHE_DATA, 84	hwloc_disc_status, 211
HWLOC_OBJ_CACHE_INSTRUCTION, 84	phases
hwloc_obj_cache_type_e, 84	hwloc_backend, 204
hwloc_obj_cache_type_t, 83	hwloc disc component, 210
HWLOC_OBJ_CACHE_UNIFIED, 84	prev_cousin
HWLOC_OBJ_CORE, 85	hwloc_obj, 220
HWLOC_OBJ_DIE, 86	prev_sibling
HWLOC_OBJ_GROUP, 85	hwloc_obj, 220
HWLOC_OBJ_L1CACHE, 85	
HWLOC_OBJ_L1ICACHE, 85	priority
	hwloc_disc_component, 210
HWLOC_OBJ_L2CACHE, 85	private_data
HWLOC_OBJ_L2ICACHE, 85	hwloc_backend, 204
HWLOC_OBJ_L3CACHE, 85	pu
HWLOC_OBJ_L3ICACHE, 85	hwloc_topology_discovery_support, 232
HWLOC_OBJ_L4CACHE, 85	
HWLOC_OBJ_L5CACHE, 85	raw
HWLOC_OBJ_MACHINE, 85	hwloc_cl_device_topology_amd, 207
HWLOC_OBJ_MEMCACHE, 86	Remove distances between objects, 159
HWLOC_OBJ_MISC, 86	hwloc_distances_release_remove, 159
HWLOC_OBJ_NUMANODE, 85	hwloc_distances_remove, 160
HWLOC_OBJ_OS_DEVICE, 86	hwloc_distances_remove_by_depth, 160
HWLOC_OBJ_OSDEV_BLOCK, 84	hwloc_distances_remove_by_type, 160
HWLOC_OBJ_OSDEV_COPROC, 84	Retrieve distances between objects, 153
HWLOC_OBJ_OSDEV_DMA, 84	hwloc_distances_get, 154
HWLOC_OBJ_OSDEV_GPU, 84	hwloc_distances_get_by_depth, 155
HWLOC_OBJ_OSDEV_NETWORK, 84	hwloc_distances_get_by_name, 155
HWLOC_OBJ_OSDEV_OPENFABRICS, 84	hwloc_distances_get_by_type, 155
hwloc_obj_osdev_type_e, 84	hwloc_distances_get_name, 155
hwloc obj osdev type t, 83	hwloc_distances_kind_e, 153
HWLOC_OBJ_PACKAGE, 85	HWLOC_DISTANCES_KIND_FROM_OS, 153
HWLOC_OBJ_PCI_DEVICE, 86	HWLOC_DISTANCES_KIND_FROM_USER, 153
HWLOC OBJ PU, 85	HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES,
hwloc_obj_type_t, 84	154
HWLOC_TYPE_UNORDERED, 83	HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH,
	154
objs	HWLOC_DISTANCES_KIND_MEANS_LATENCY,
hwloc_distances_s, 212	153
oldvalue	
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_	hwloc distances transform, 156
228	
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_	_obj_attwooffites_transform_e, 154
229	HWLOC_DISTANCES_TRANSFORM_LINKS, 154
os_index	HWLOC_DISTANCES_TRANSFORM_MERGE_SWITCH_PORTS,
hwloc_obj, 220	154
osdev	HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL,
hwloc_obj_attr_u, 222	154
	HWLOC_DISTANCES_TRANSFORM_TRANSITIVE_CLOSURE,
page_types	154
hwloc_obj_attr_u::hwloc_numanode_attr_s, 215	revision
page_types_len	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 224
hwloc_obj_attr_u::hwloc_numanode_attr_s, 215	
parent	secondary_bus
hwloc_obj, 220	hwloc_obj_attr_u::hwloc_bridge_attr_s, 205

set_area_membind	hwloc_bitmap_free, 141
hwloc_topology_membind_support, 233	hwloc_bitmap_from_ith_ulong, 142
set_proc_cpubind	hwloc_bitmap_from_ulong, 142
hwloc_topology_cpubind_support, 225	hwloc_bitmap_from_ulongs, 142
set_proc_membind	hwloc_bitmap_intersects, 142
hwloc_topology_membind_support, 233	hwloc_bitmap_isequal, 142
set_thisproc_cpubind	hwloc_bitmap_isfull, 142
hwloc_topology_cpubind_support, 225	hwloc_bitmap_isincluded, 143
set_thisproc_membind	hwloc_bitmap_isset, 143
hwloc_topology_membind_support, 233	hwloc_bitmap_iszero, 143
set_thisthread_cpubind	hwloc_bitmap_last, 143
hwloc_topology_cpubind_support, 225	hwloc_bitmap_last_unset, 143
set_thisthread_membind	hwloc_bitmap_list_asprintf, 144
hwloc_topology_membind_support, 234	hwloc_bitmap_list_snprintf, 144
set_thread_cpubind	hwloc_bitmap_list_sscanf, 144
hwloc_topology_cpubind_support, 225	hwloc_bitmap_next, 144
Sharing topologies between processes, 190	hwloc_bitmap_next_unset, 144
hwloc_shmem_topology_adopt, 190	hwloc_bitmap_not, 145
hwloc_shmem_topology_get_length, 191	hwloc_bitmap_nr_ulongs, 145
hwloc_shmem_topology_write, 191	hwloc_bitmap_only, 145
sibling_rank	hwloc_bitmap_or, 145
hwloc_obj, 220	hwloc_bitmap_set, 145
size	hwloc_bitmap_set_ith_ulong, 145
hwloc_obj_attr_u::hwloc_cache_attr_s, 206	hwloc_bitmap_set_range, 146
hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_me	mor <i>l</i> nwdagebitynpæpssinglify, 146
215	hwloc_bitmap_snprintf, 146
string	hwloc_bitmap_sscanf, 146
hwloc_topology_diff_obj_attr_u, 228	hwloc_bitmap_t, 138
subdevice_id	hwloc_bitmap_taskset_asprintf, 146
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 224	hwloc_bitmap_taskset_snprintf, 147
subkind	hwloc_bitmap_taskset_sscanf, 147
hwloc_obj_attr_u::hwloc_group_attr_s, 212	hwloc_bitmap_to_ith_ulong, 147
subordinate_bus	hwloc_bitmap_to_ulong, 147
hwloc_obj_attr_u::hwloc_bridge_attr_s, 205	hwloc_bitmap_to_ulongs, 147
subtype	hwloc_bitmap_weight, 148
hwloc_obj, 220	hwloc_bitmap_xor, 148
subvendor_id	hwloc_bitmap_zero, 148
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 224	hwloc_const_bitmap_t, 138
symmetric_subtree to	oo_complex
hwloc_obj, 221	hwloc_topology_diff_u, 231
Т	opology Creation and Destruction, 87
The bitmap API, 136	hwloc_topology_abi_check, 88
hwloc_bitmap_allbut, 139	hwloc_topology_check, 88
hwloc_bitmap_alloc, 139	hwloc_topology_destroy, 88
hwloc_bitmap_alloc_full, 139	hwloc_topology_dup, 88
hwloc_bitmap_and, 139	hwloc_topology_init, 89
hwloc_bitmap_andnot, 139	hwloc_topology_load, 89
hwloc_bitmap_asprintf, 139	hwloc_topology_t, 87
hwloc_bitmap_clr, 140	opology Detection Configuration and Query, 109
hwloc_bitmap_clr_range, 140	HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_BINDING
hwloc_bitmap_compare, 140	113
hwloc_bitmap_compare_first, 140	HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT,
hwloc_bitmap_copy, 141	112
hwloc_bitmap_dup, 141	HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED,
hwloc_bitmap_fill, 141	110
hwloc_bitmap_first, 141	HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM,
hwloc_bitmap_first_unset, 141	111
hwloc_bitmap_foreach_begin, 138	
hwloc_bitmap_foreach_end, 138	

```
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDINGpc_obj_attr_u::hwloc_osdev_attr_s, 222
                                                         hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generi
         112
    HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_MEMBINDING, 226
                                                         hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_
         113
    HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES,
         111
                                                         hwloc topology diff obj attr u::hwloc topology diff obj attr uint64
    hwloc_topology_flags_e, 110
                                                         hwloc_topology_diff_u::hwloc_topology_diff_generic_s,
    hwloc_topology_get_flags, 114
    hwloc topology get support, 114
    hwloc topology get type filter, 114
                                                         hwloc topology diff u::hwloc topology diff obj attr s,
    hwloc_topology_get_userdata, 115
                                                             227
    hwloc_topology_is_thissystem, 115
                                                         hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
    hwloc_topology_set_all_types_filter, 115
                                                             230
    hwloc_topology_set_cache_types_filter, 115
                                                    uint64
    hwloc_topology_set_flags, 115
                                                         hwloc_topology_diff_obj_attr_u, 228
    hwloc_topology_set_icache_types_filter, 115
                                                    unused
    hwloc topology set io types filter, 116
                                                         hwloc_cl_device_topology_amd, 207
    hwloc_topology_set_type_filter, 116
                                                    upstream
    hwloc_topology_set_userdata, 116
                                                         hwloc obj attr u::hwloc bridge attr s, 205
    hwloc type filter e, 113
                                                    upstream type
    HWLOC TYPE FILTER KEEP ALL, 113
                                                         hwloc_obj_attr_u::hwloc_bridge_attr_s, 205
    HWLOC TYPE FILTER KEEP IMPORTANT, 114
                                                    userdata
    HWLOC_TYPE_FILTER_KEEP_NONE, 113
                                                         hwloc obj, 221
    HWLOC_TYPE_FILTER_KEEP_STRUCTURE,
         114
                                                    value
Topology differences, 186
                                                         hwloc_info_s, 213
    hwloc_topology_diff_apply, 188
                                                    values
    hwloc topology diff apply flags e, 187
                                                         hwloc_distances_s, 212
    HWLOC TOPOLOGY DIFF APPLY REVERSE,
                                                    vendor id
         187
                                                         hwloc_obj_attr_u::hwloc_pcidev_attr_s, 224
    hwloc_topology_diff_build, 188
    hwloc_topology_diff_destroy, 188
                                                    Windows-specific helpers, 173
    hwloc topology diff export xml, 188
                                                         hwloc windows get nr processor groups, 173
    hwloc_topology_diff_export_xmlbuffer, 189
                                                         hwloc_windows_get_processor_group_cpuset,
    hwloc_topology_diff_load_xml, 189
                                                             174
    hwloc_topology_diff_load_xmlbuffer, 189
    HWLOC TOPOLOGY DIFF OBJ ATTR, 187
    HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO,
    HWLOC TOPOLOGY DIFF OBJ ATTR NAME,
         187
    HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE,
         187
    hwloc topology diff obj attr type e, 187
    hwloc_topology_diff_obj_attr_type_t, 186
    hwloc_topology_diff_t, 186
    HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX,
    hwloc topology diff type e, 187
    hwloc_topology_diff_type_t, 187
total memory
    hwloc obj, 221
type
    hwloc_cl_device_topology_amd, 207
    hwloc_component, 209
    hwloc_location, 214
    hwloc_obj, 221
    hwloc_obj_attr_u::hwloc_cache_attr_s, 206
```