Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

TCP: Overview

RFCs: 793, 1122, 1323, 2018, 2581

- point-to-point:
  - one sender, one receiver
- reliable, in-order, *byte steam:*
  - no "message boundaries"
- pipelined:
  - TCP congestion and flow control set window size
- *send & receive buffers*

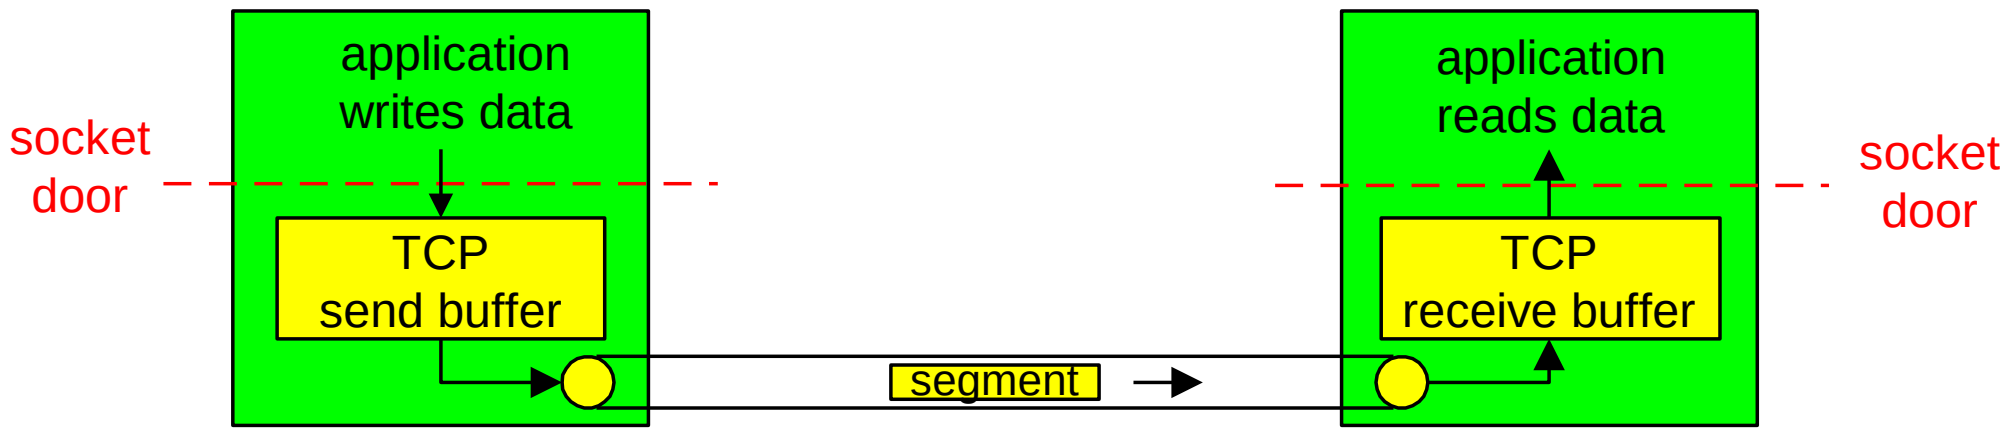

- full duplex data:
  - bi-directional data flow in same connection
  - MSS: maximum segment size
- connection-oriented:
  - handshaking (exchange of control msgs) init's sender, receiver state before data exchange
- flow controlled:
  - sender will not overwhelm receiver

TCP segment structure

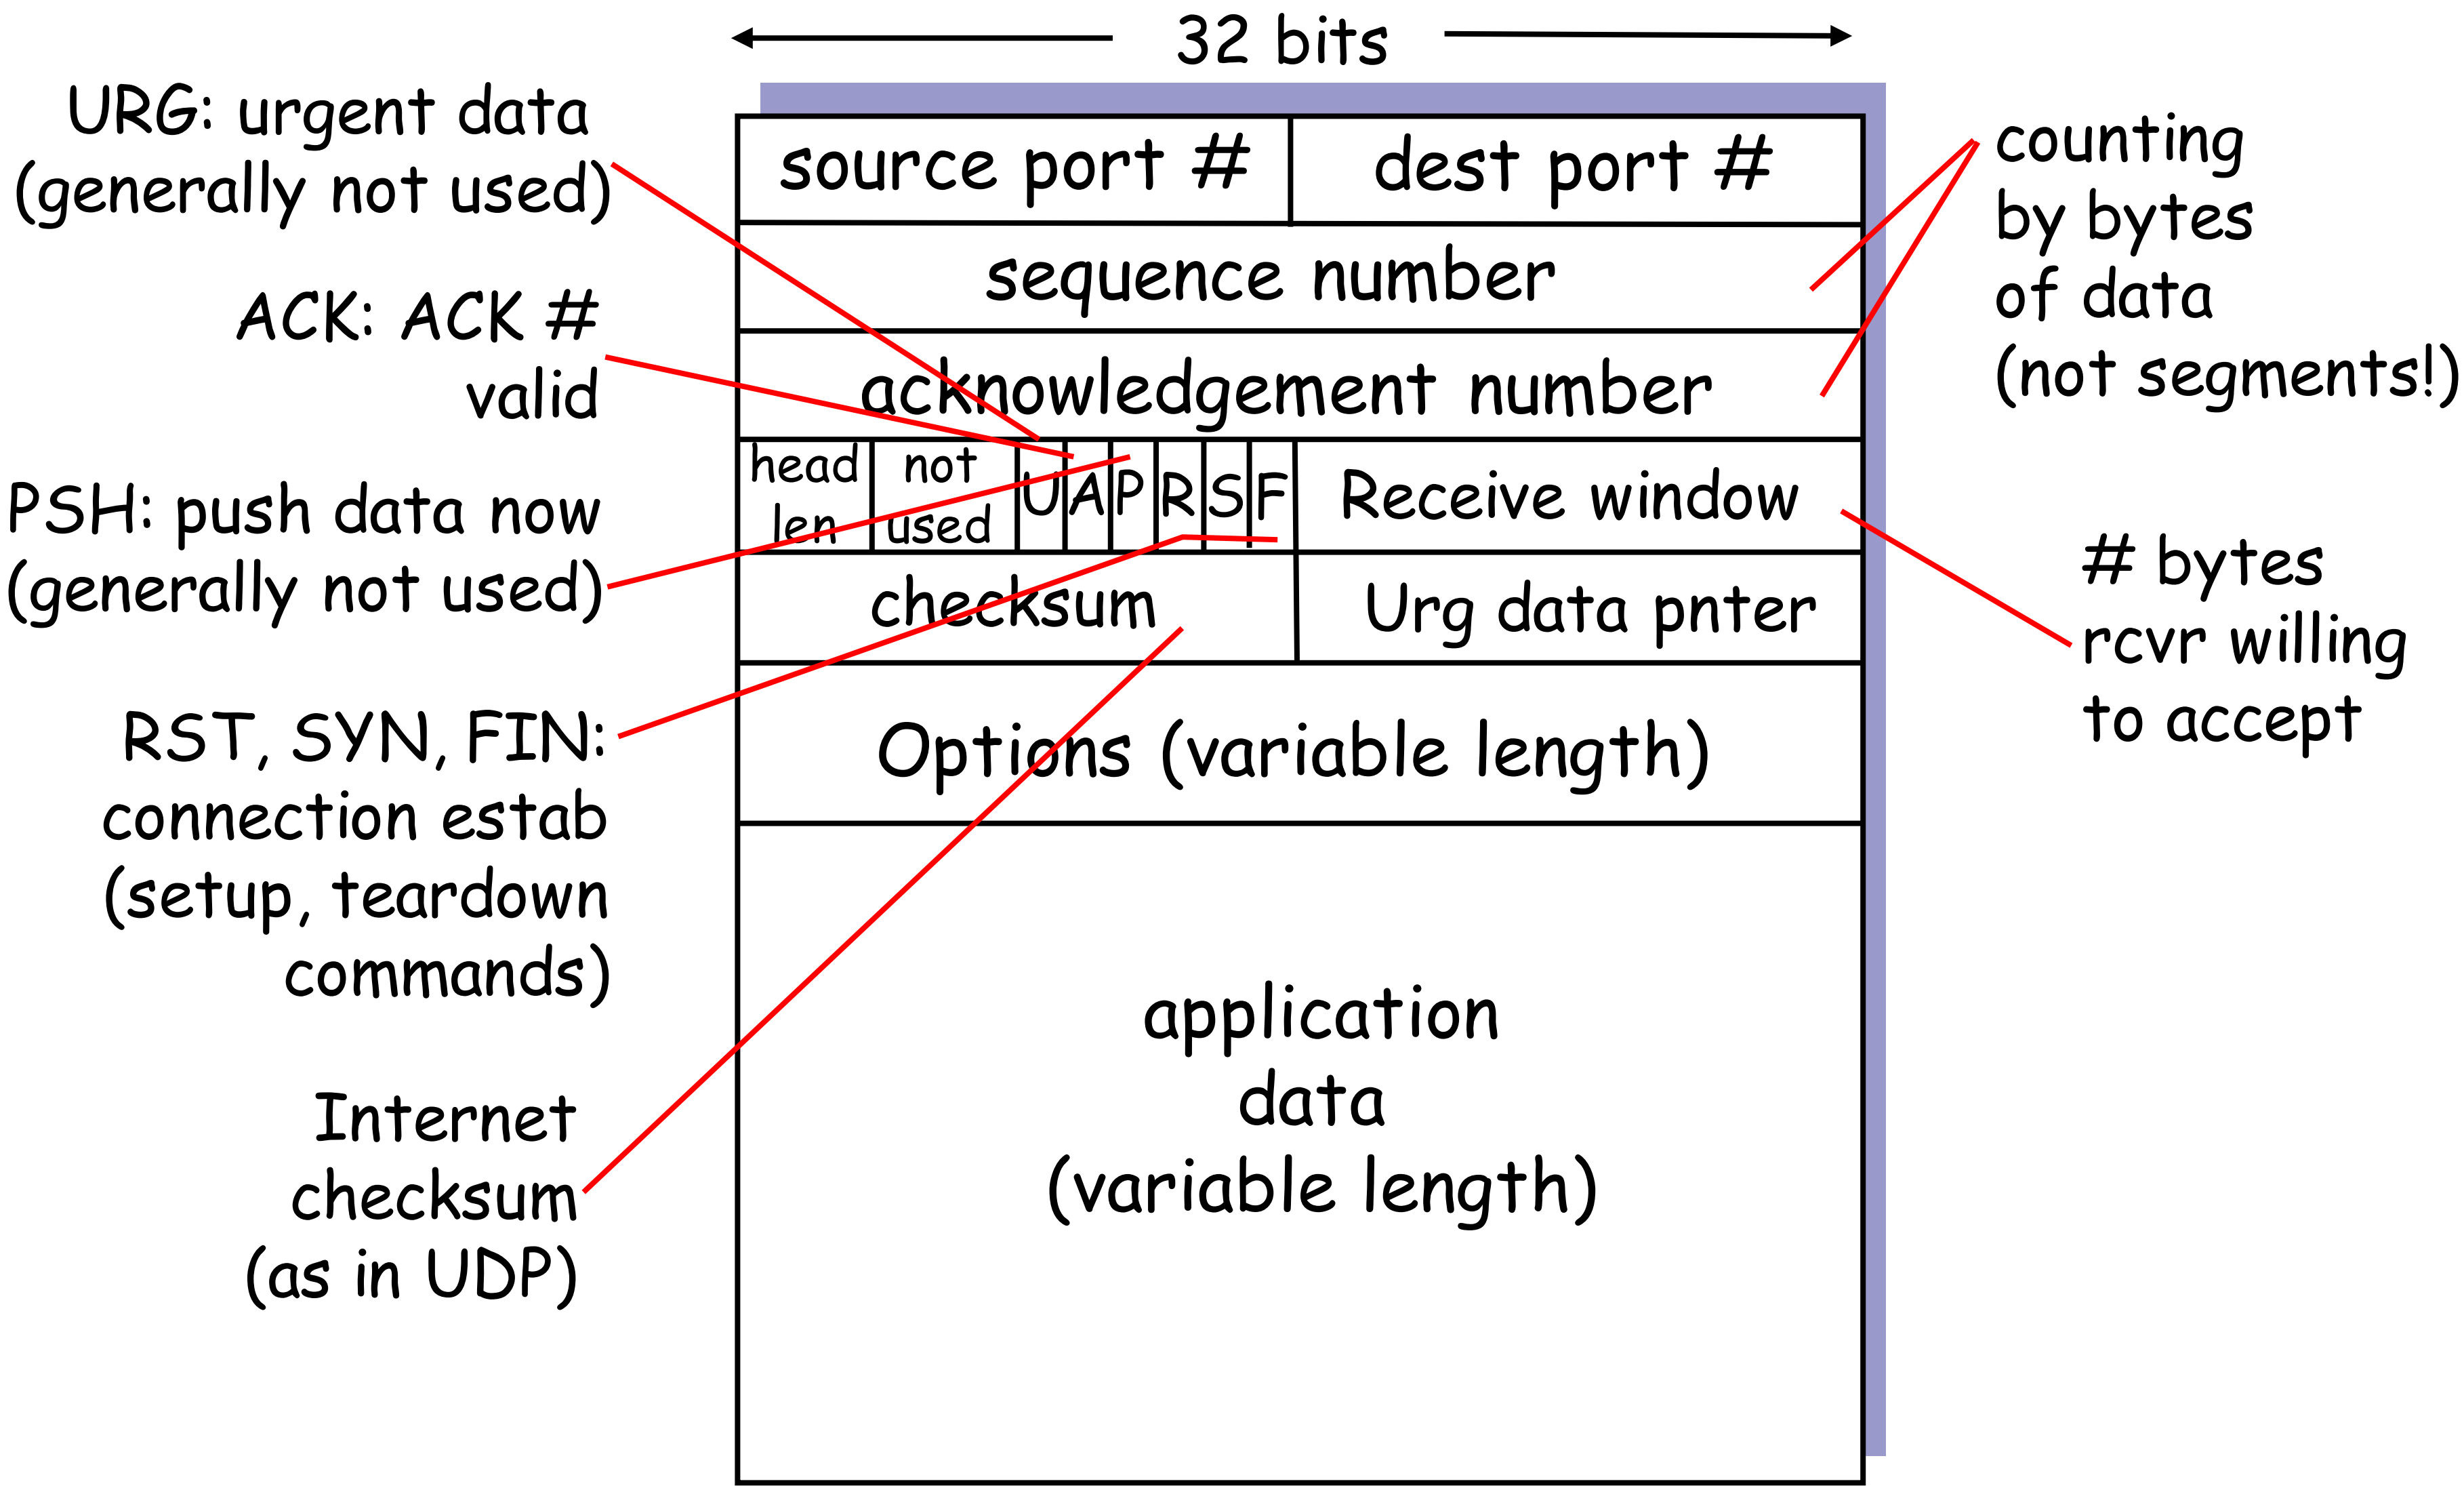

TCP seq. #'s and ACKs

Seq. #'s:

- byte stream "number" of first byte in segment's data

ACKs:

- seq # of next byte expected from other side
- cumulative ACK

Q: how receiver handles out-of-order segments

- A: TCP spec doesn't say, - up to implementor

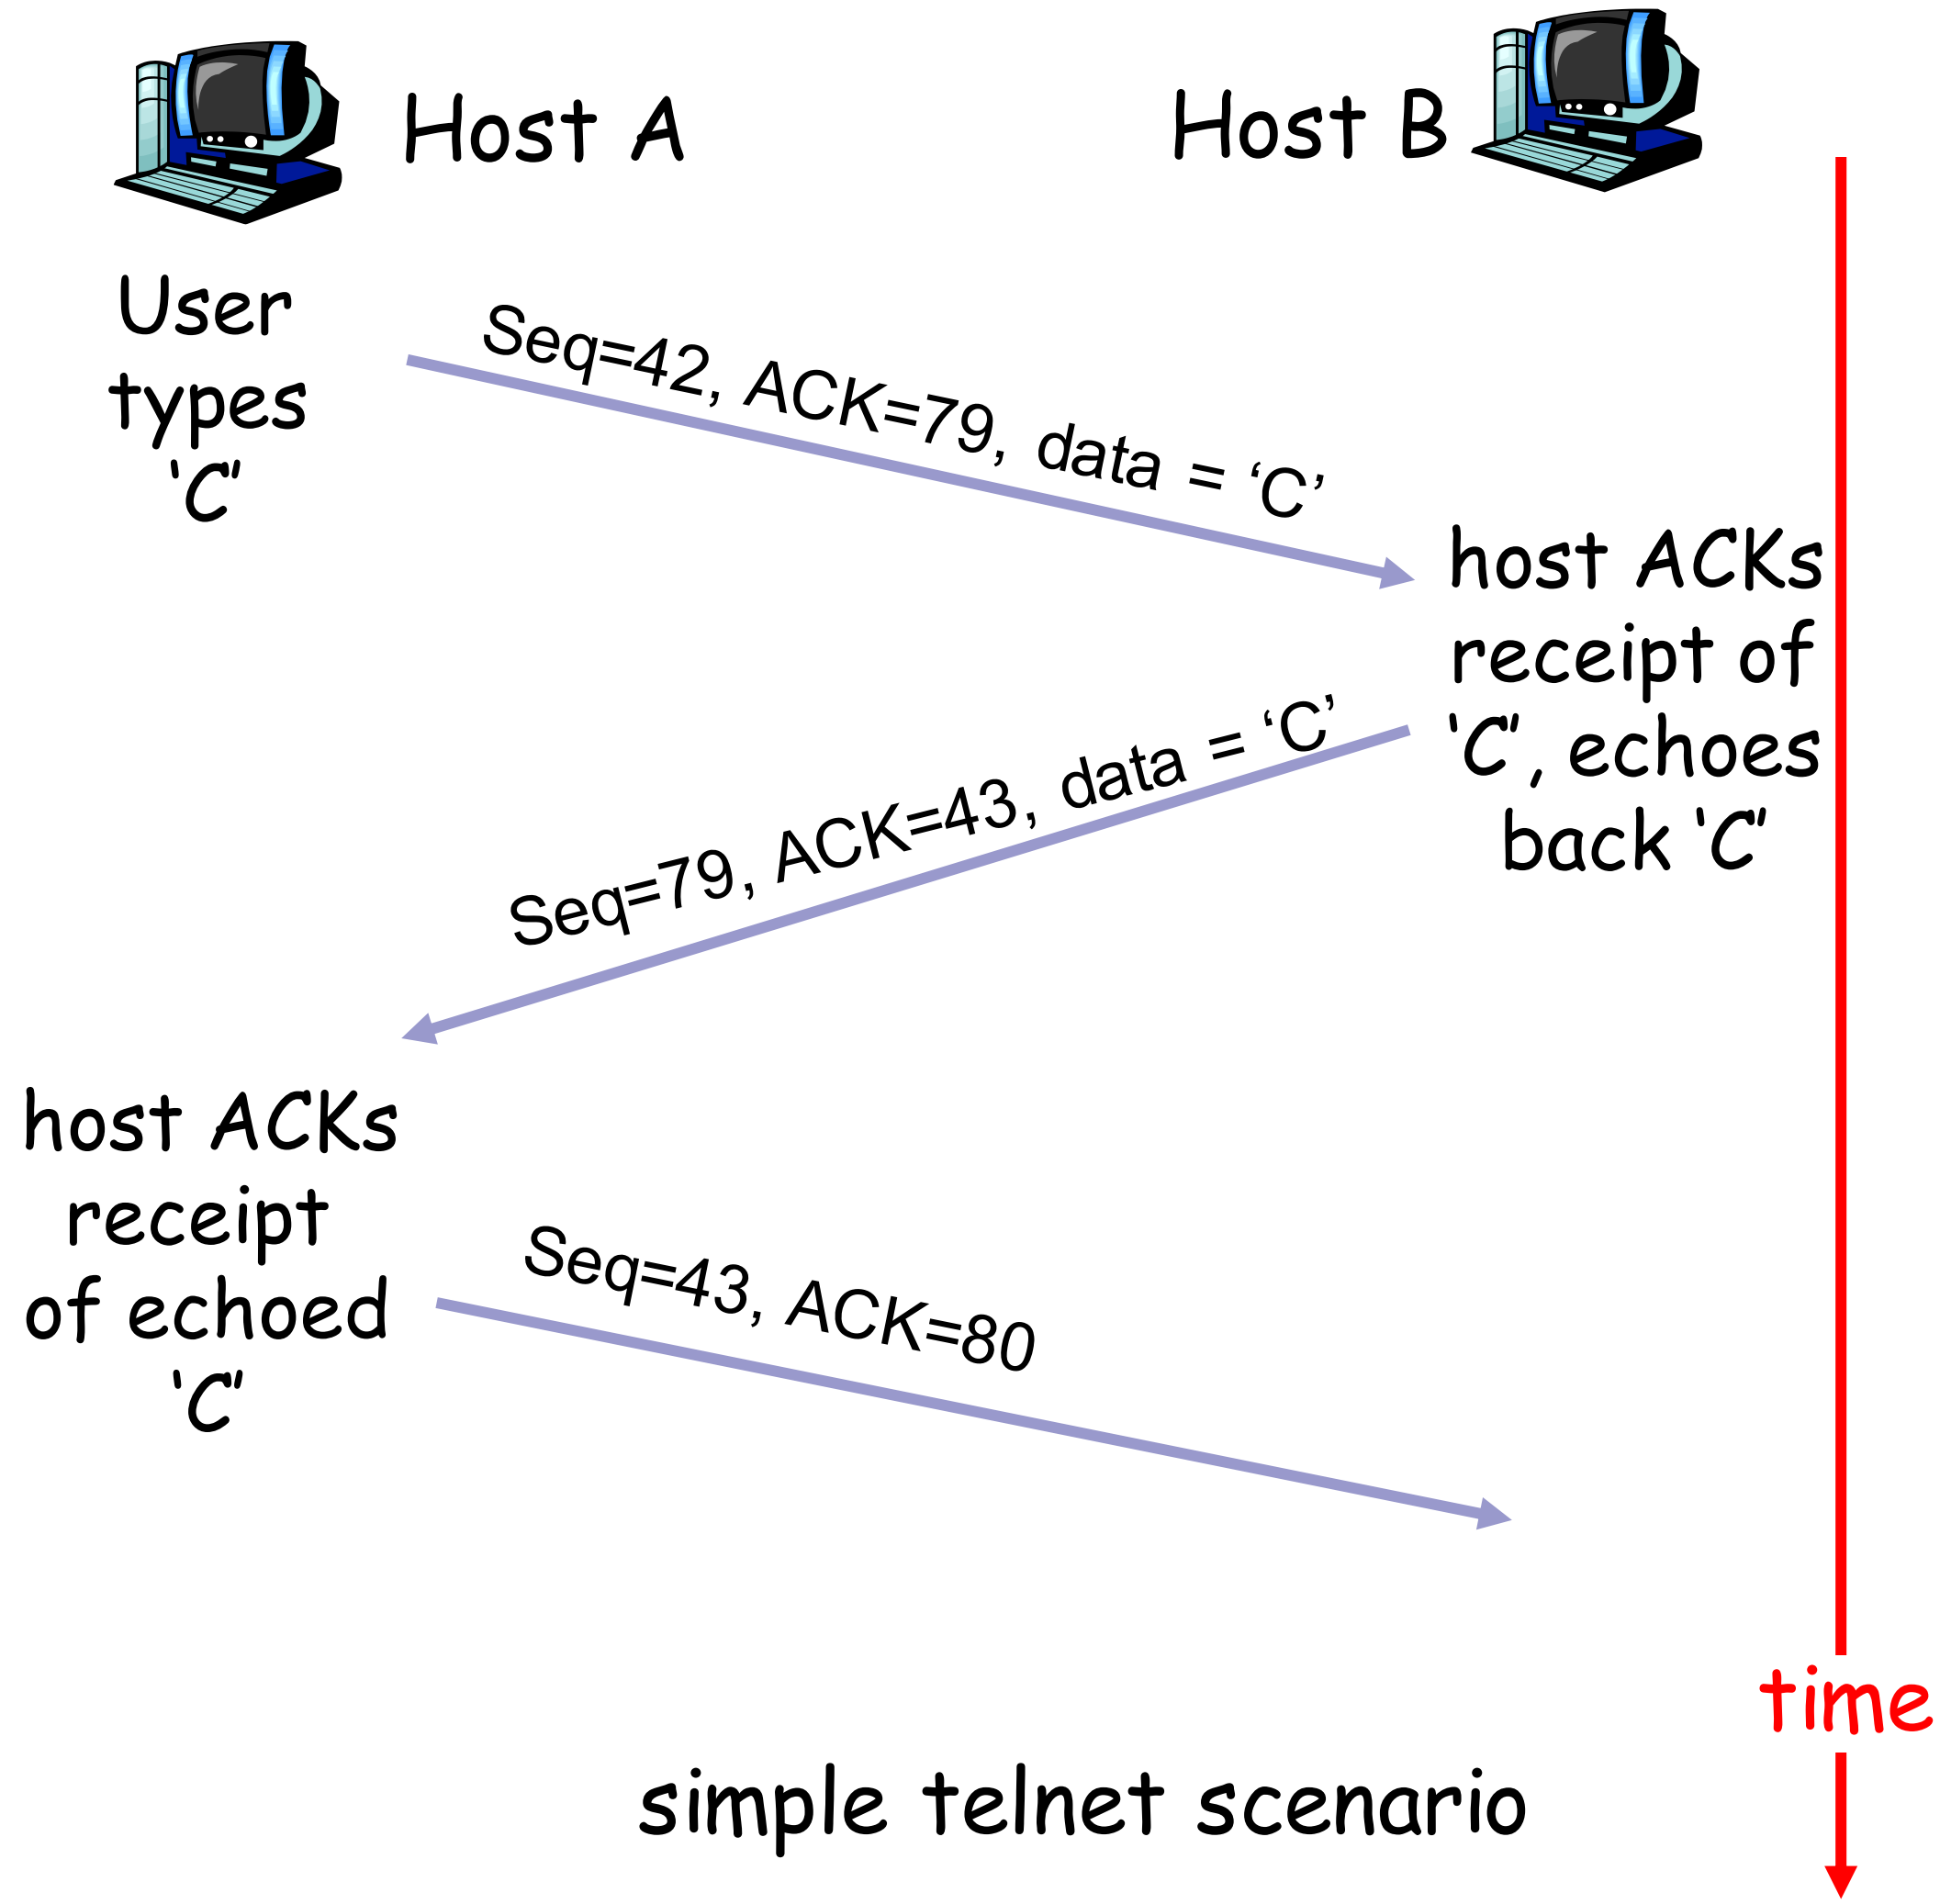

simple telnet scenario

TCP Round Trip Time and Timeout

Q: how to set TCP timeout value?

- longer than RTT
  - but RTT varies
- too short: premature timeout
  - unnecessary retransmissions
- too long: slow reaction to segment loss

Q: how to estimate RTT?

- **`SampleRTT`**: measured time from segment transmission until ACK receipt
  - ignore retransmissions
- **`SampleRTT`** will vary, want estimated RTT "smoother"
  - average several recent measurements, not just current **`SampleRTT`**

TCP Round Trip Time and Timeout

EstimatedRTT = (1- α)*EstimatedRTT + α*SampleRTT

- Exponential weighted moving average
- influence of past sample decreases exponentially fast
- typical value: $\alpha = 0.125$

Example RTT estimation:

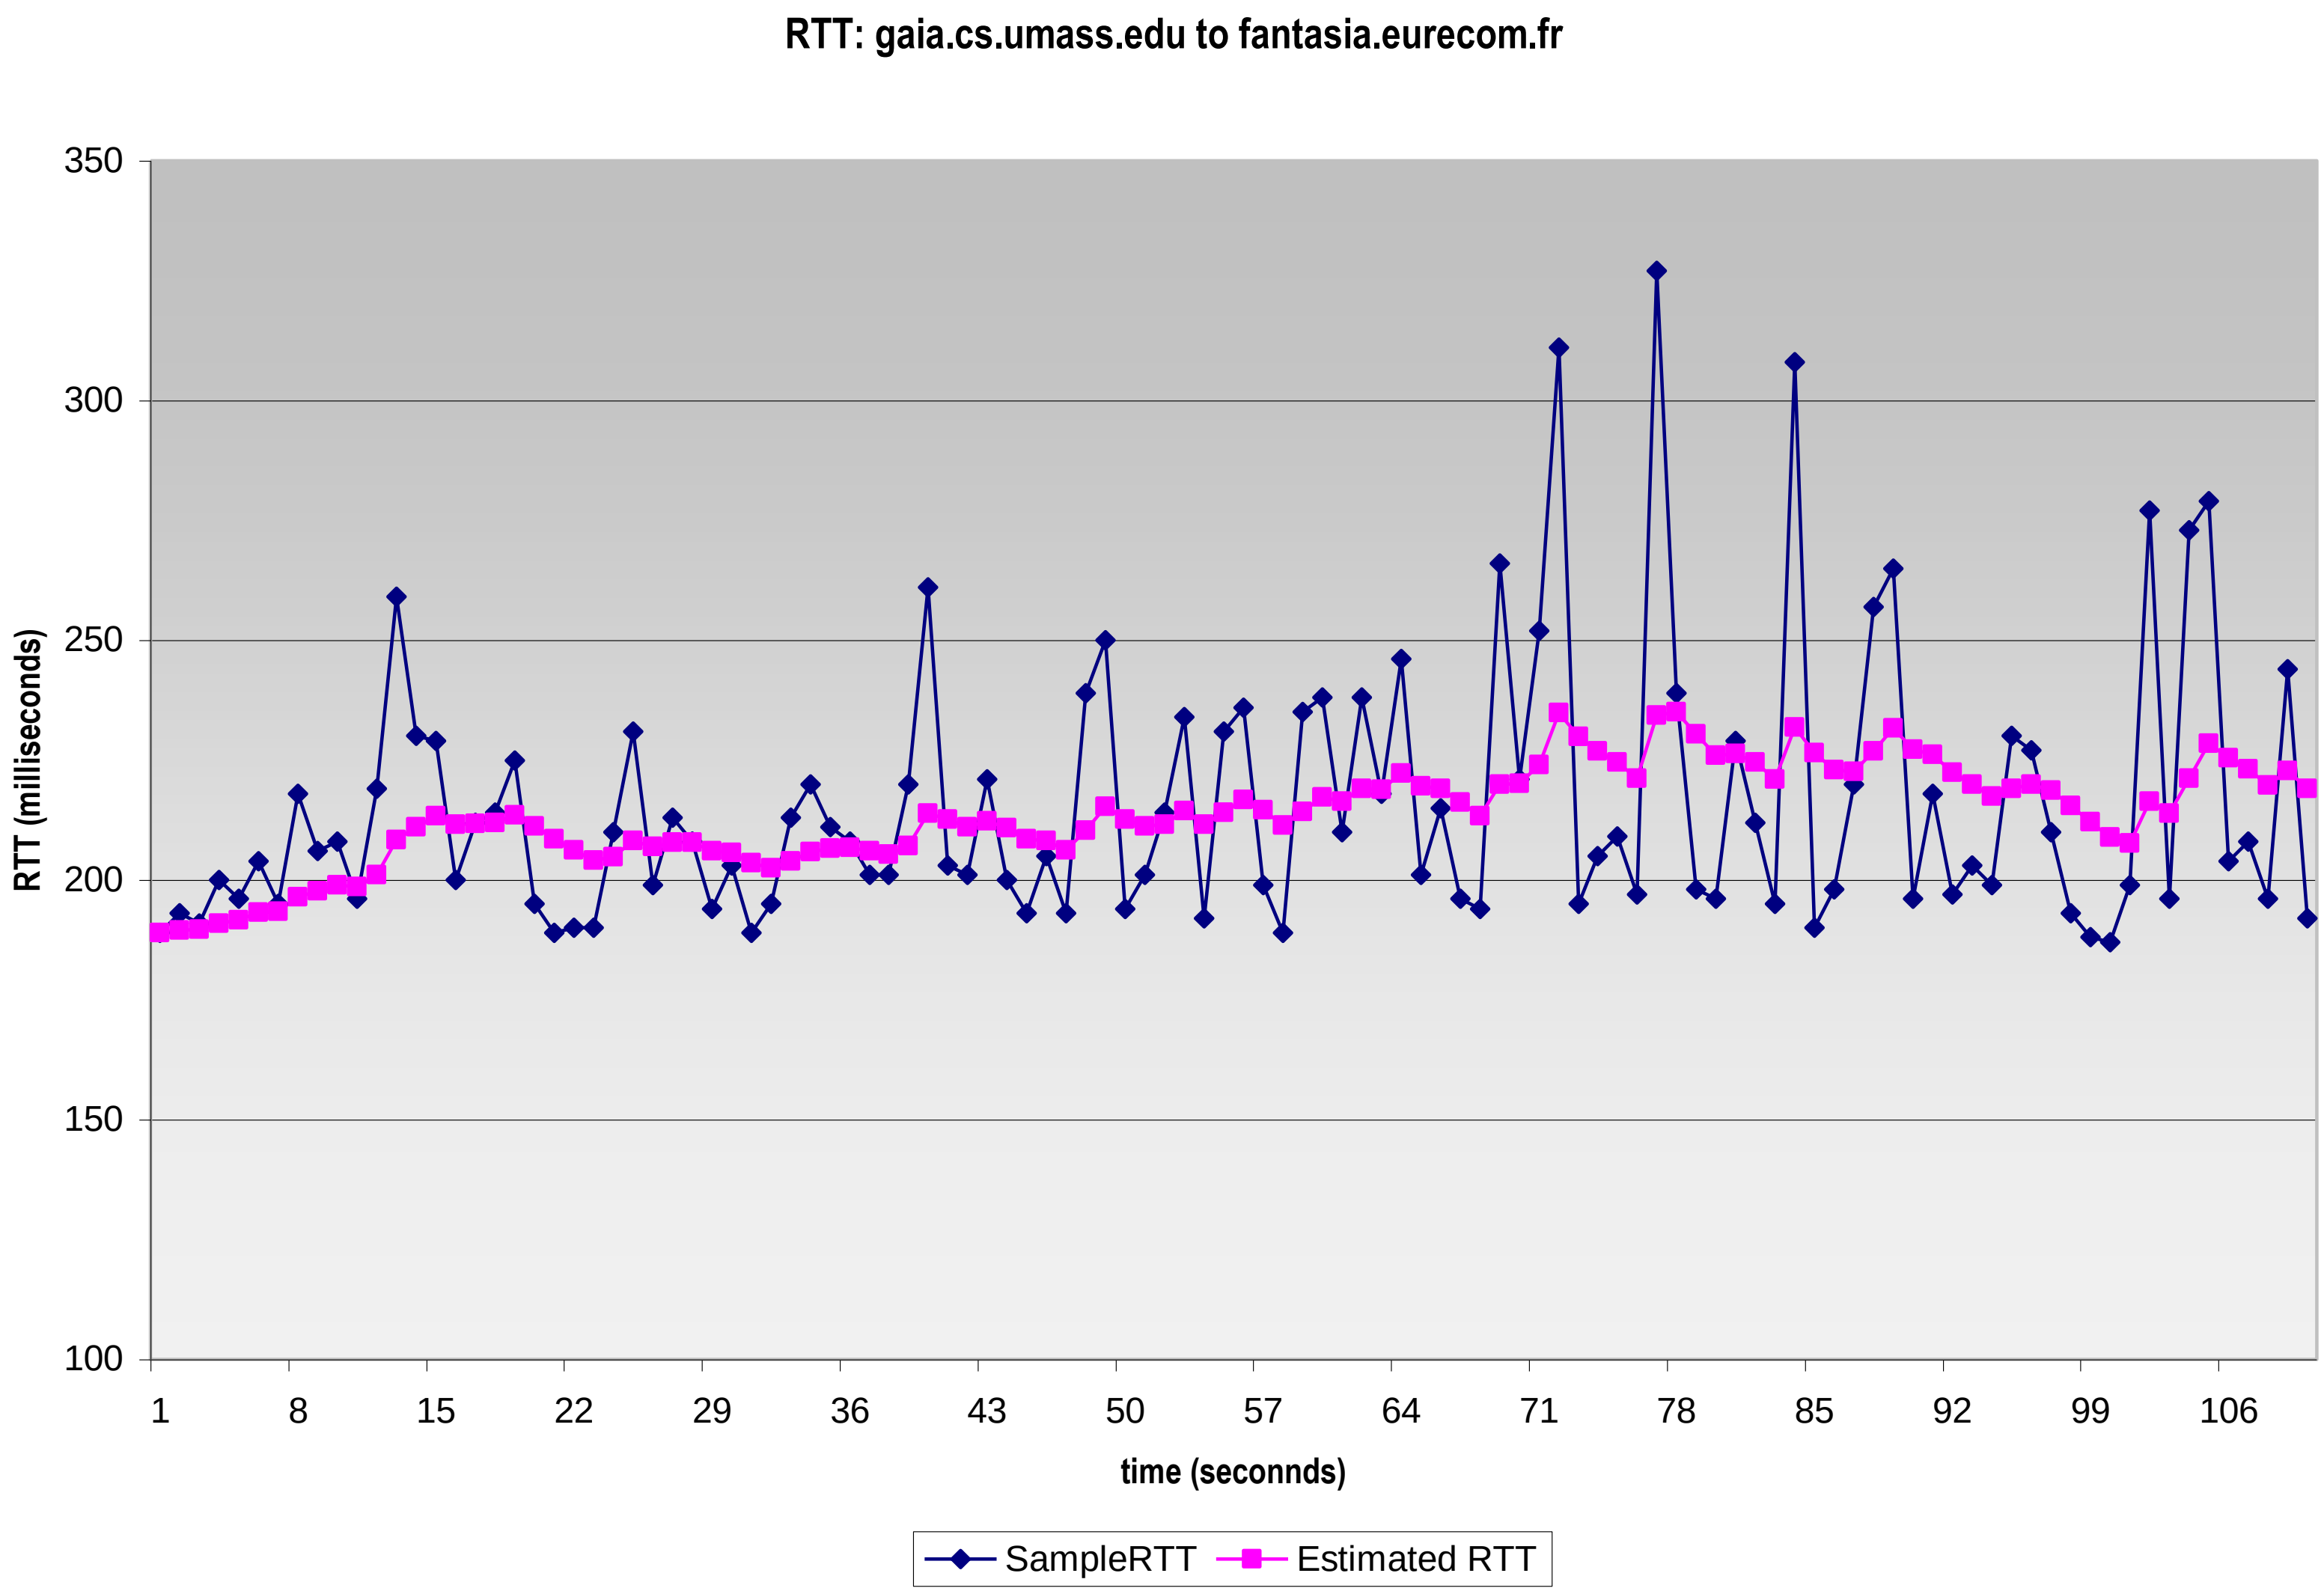

TCP Round Trip Time and Timeout

Setting the timeout

- **`EstimtedRTT`** plus "safety margin"
  - large variation in **`EstimatedRTT`** **`->`** larger safety margin
- first estimate of how much SampleRTT deviates from EstimatedRTT:

```
DevRTT = (1-β)*DevRTT +
             β*|SampleRTT-EstimatedRTT|

(typically, β = 0.25)
```

Then set timeout interval:

```
TimeoutInterval = EstimatedRTT + 4*DevRTT
```

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

TCP reliable data transfer

- TCP creates rdt service on top of IP's unreliable service
- Pipelined segments
- Cumulative acks
- TCP uses single retransmission timer
- Retransmissions are triggered by:
  - timeout events
  - duplicate acks
- Initially consider simplified TCP sender:
  - ignore duplicate acks
  - ignore flow control, congestion control

TCP sender events:

data rcvd from app:

- Create segment with seq #
- seq # is byte-stream number of first data byte in segment
- start timer if not already running (think of timer as for oldest unacked segment)
- expiration interval: `TimeOutInterval`

timeout:

- retransmit segment that caused timeout
- restart timer

Ack rcvd:

- If acknowledges previously unacked segments
  - update what is known to be acked
  - start timer if there are outstanding segments

TCP Sender (simplified)

```
NextSeqNum = InitialSeqNum
SendBase = InitialSeqNum

loop (forever) {
  switch(event)

  event: data received from application above
      create TCP segment with sequence number NextSeqNum
      if (timer currently not running)
          start timer
      pass segment to IP
      NextSeqNum = NextSeqNum + length(data)

  event: timer timeout
      retransmit not-yet-acknowledged segment with
           smallest sequence number
      start timer

  event: ACK received, with ACK field value of y
      if (y > SendBase) {
          SendBase = y
          if (there are currently not-yet-acknowledged segments)
               start timer
          }

} /* end of loop forever */
```

TCP: retransmission scenarios

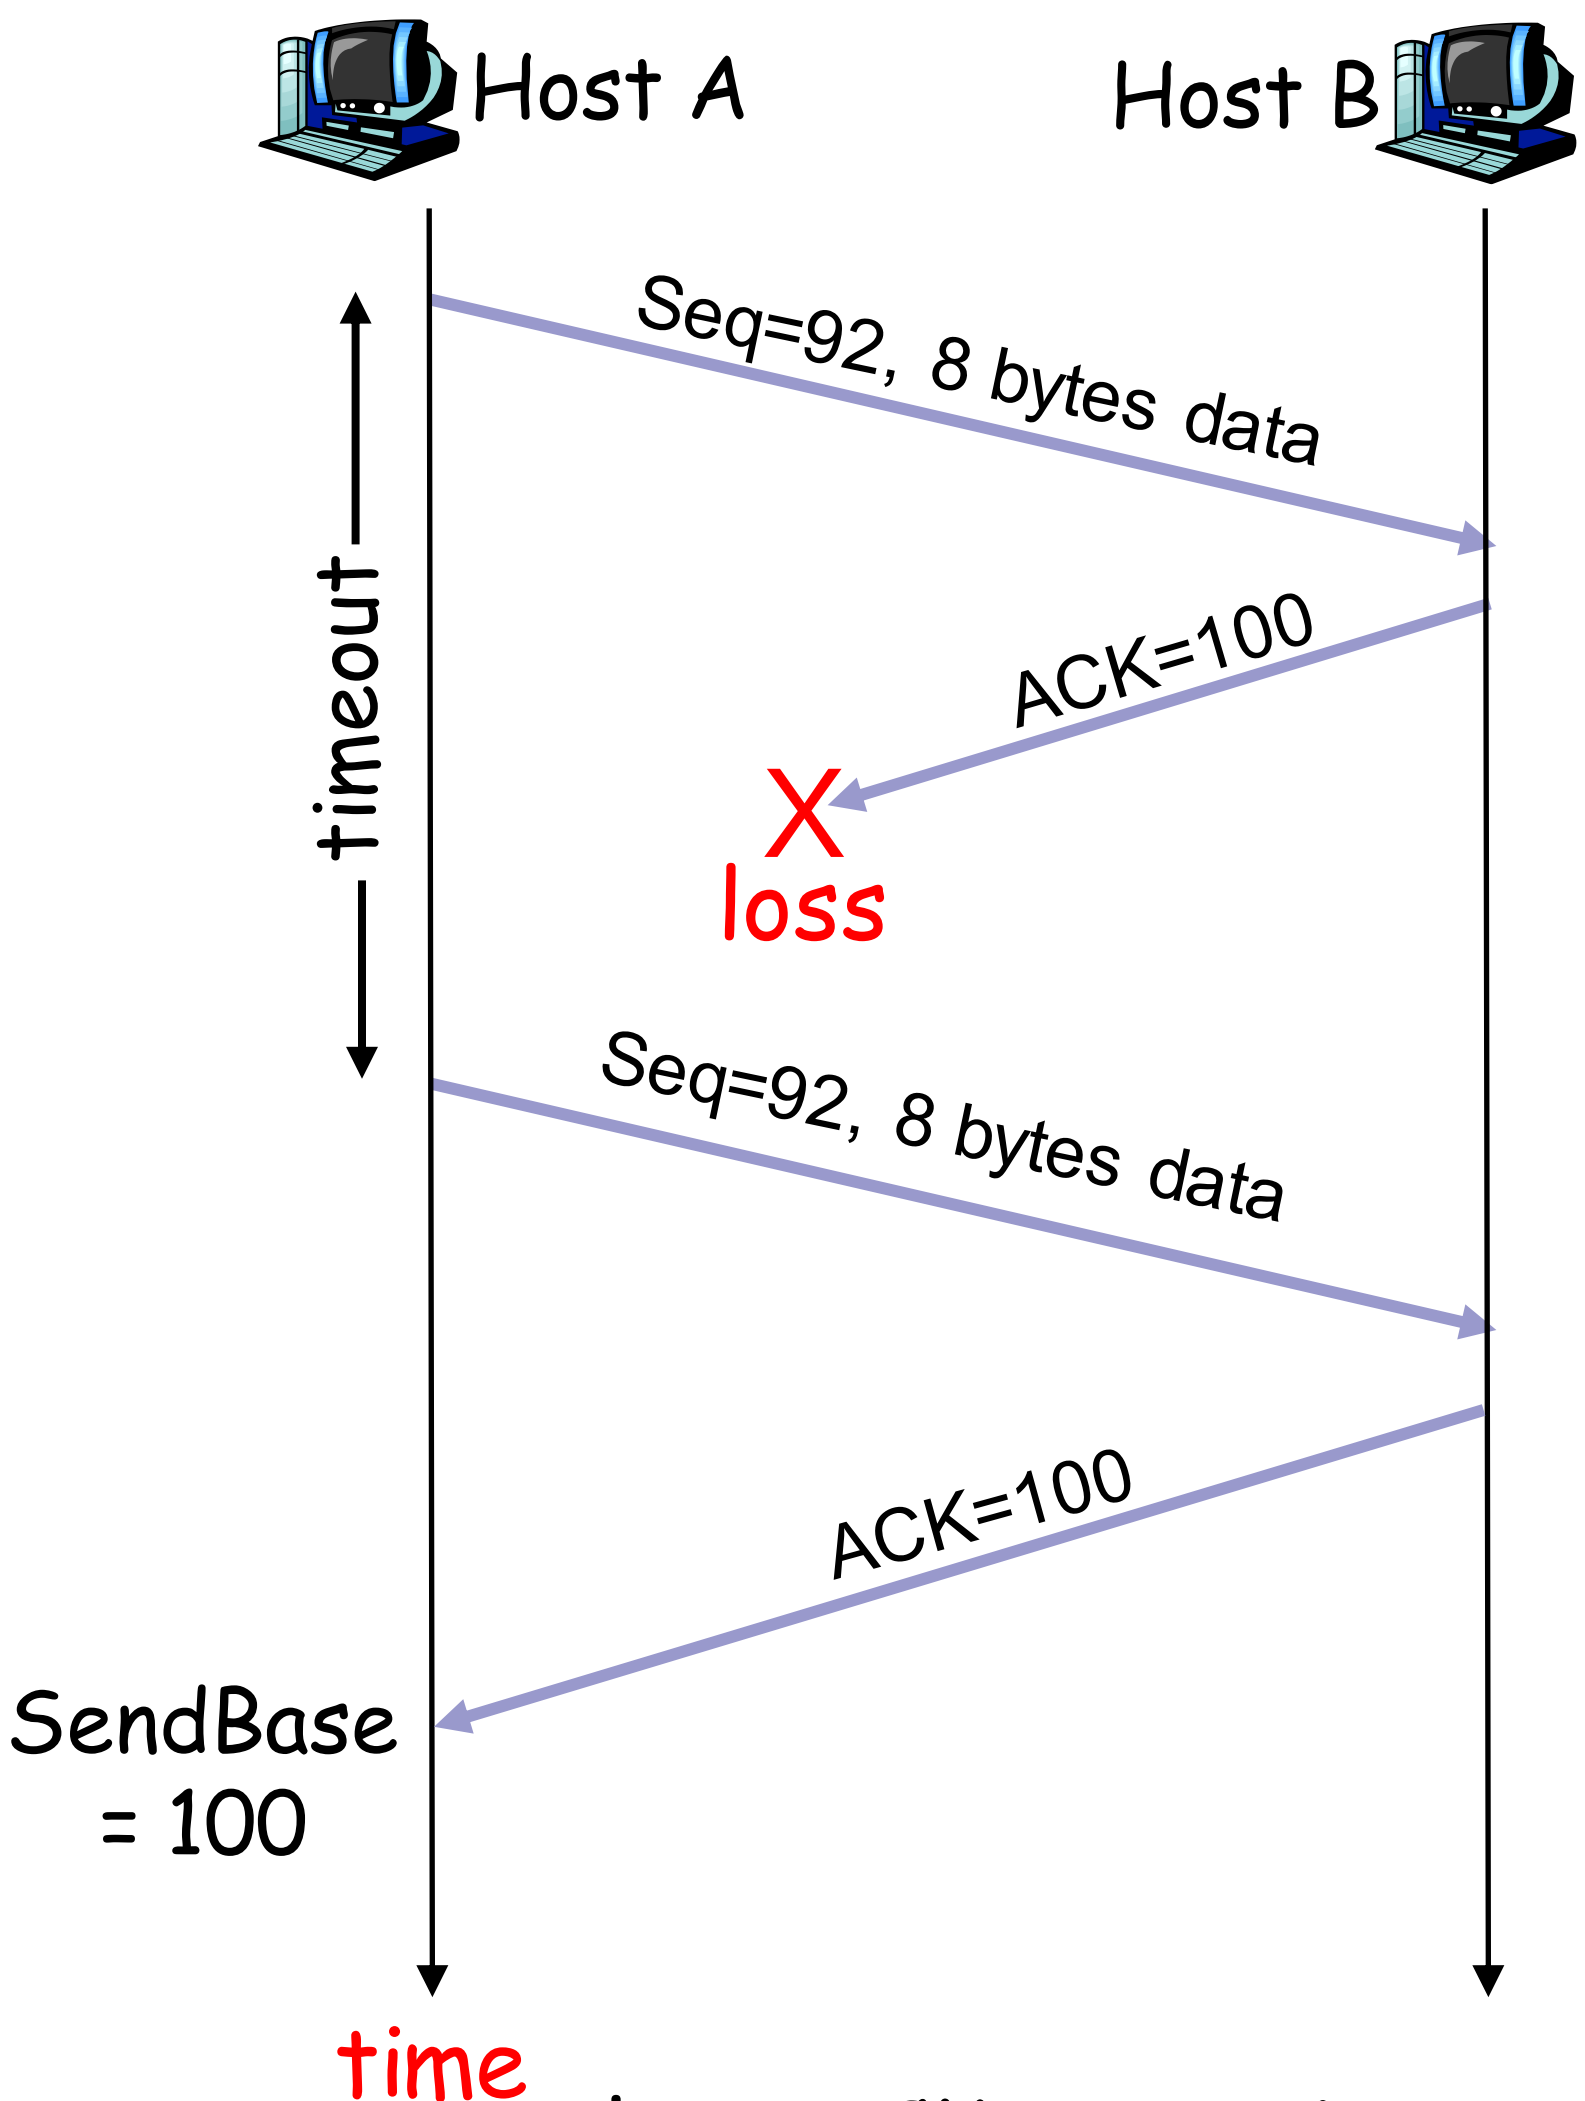

lost ACK scenario

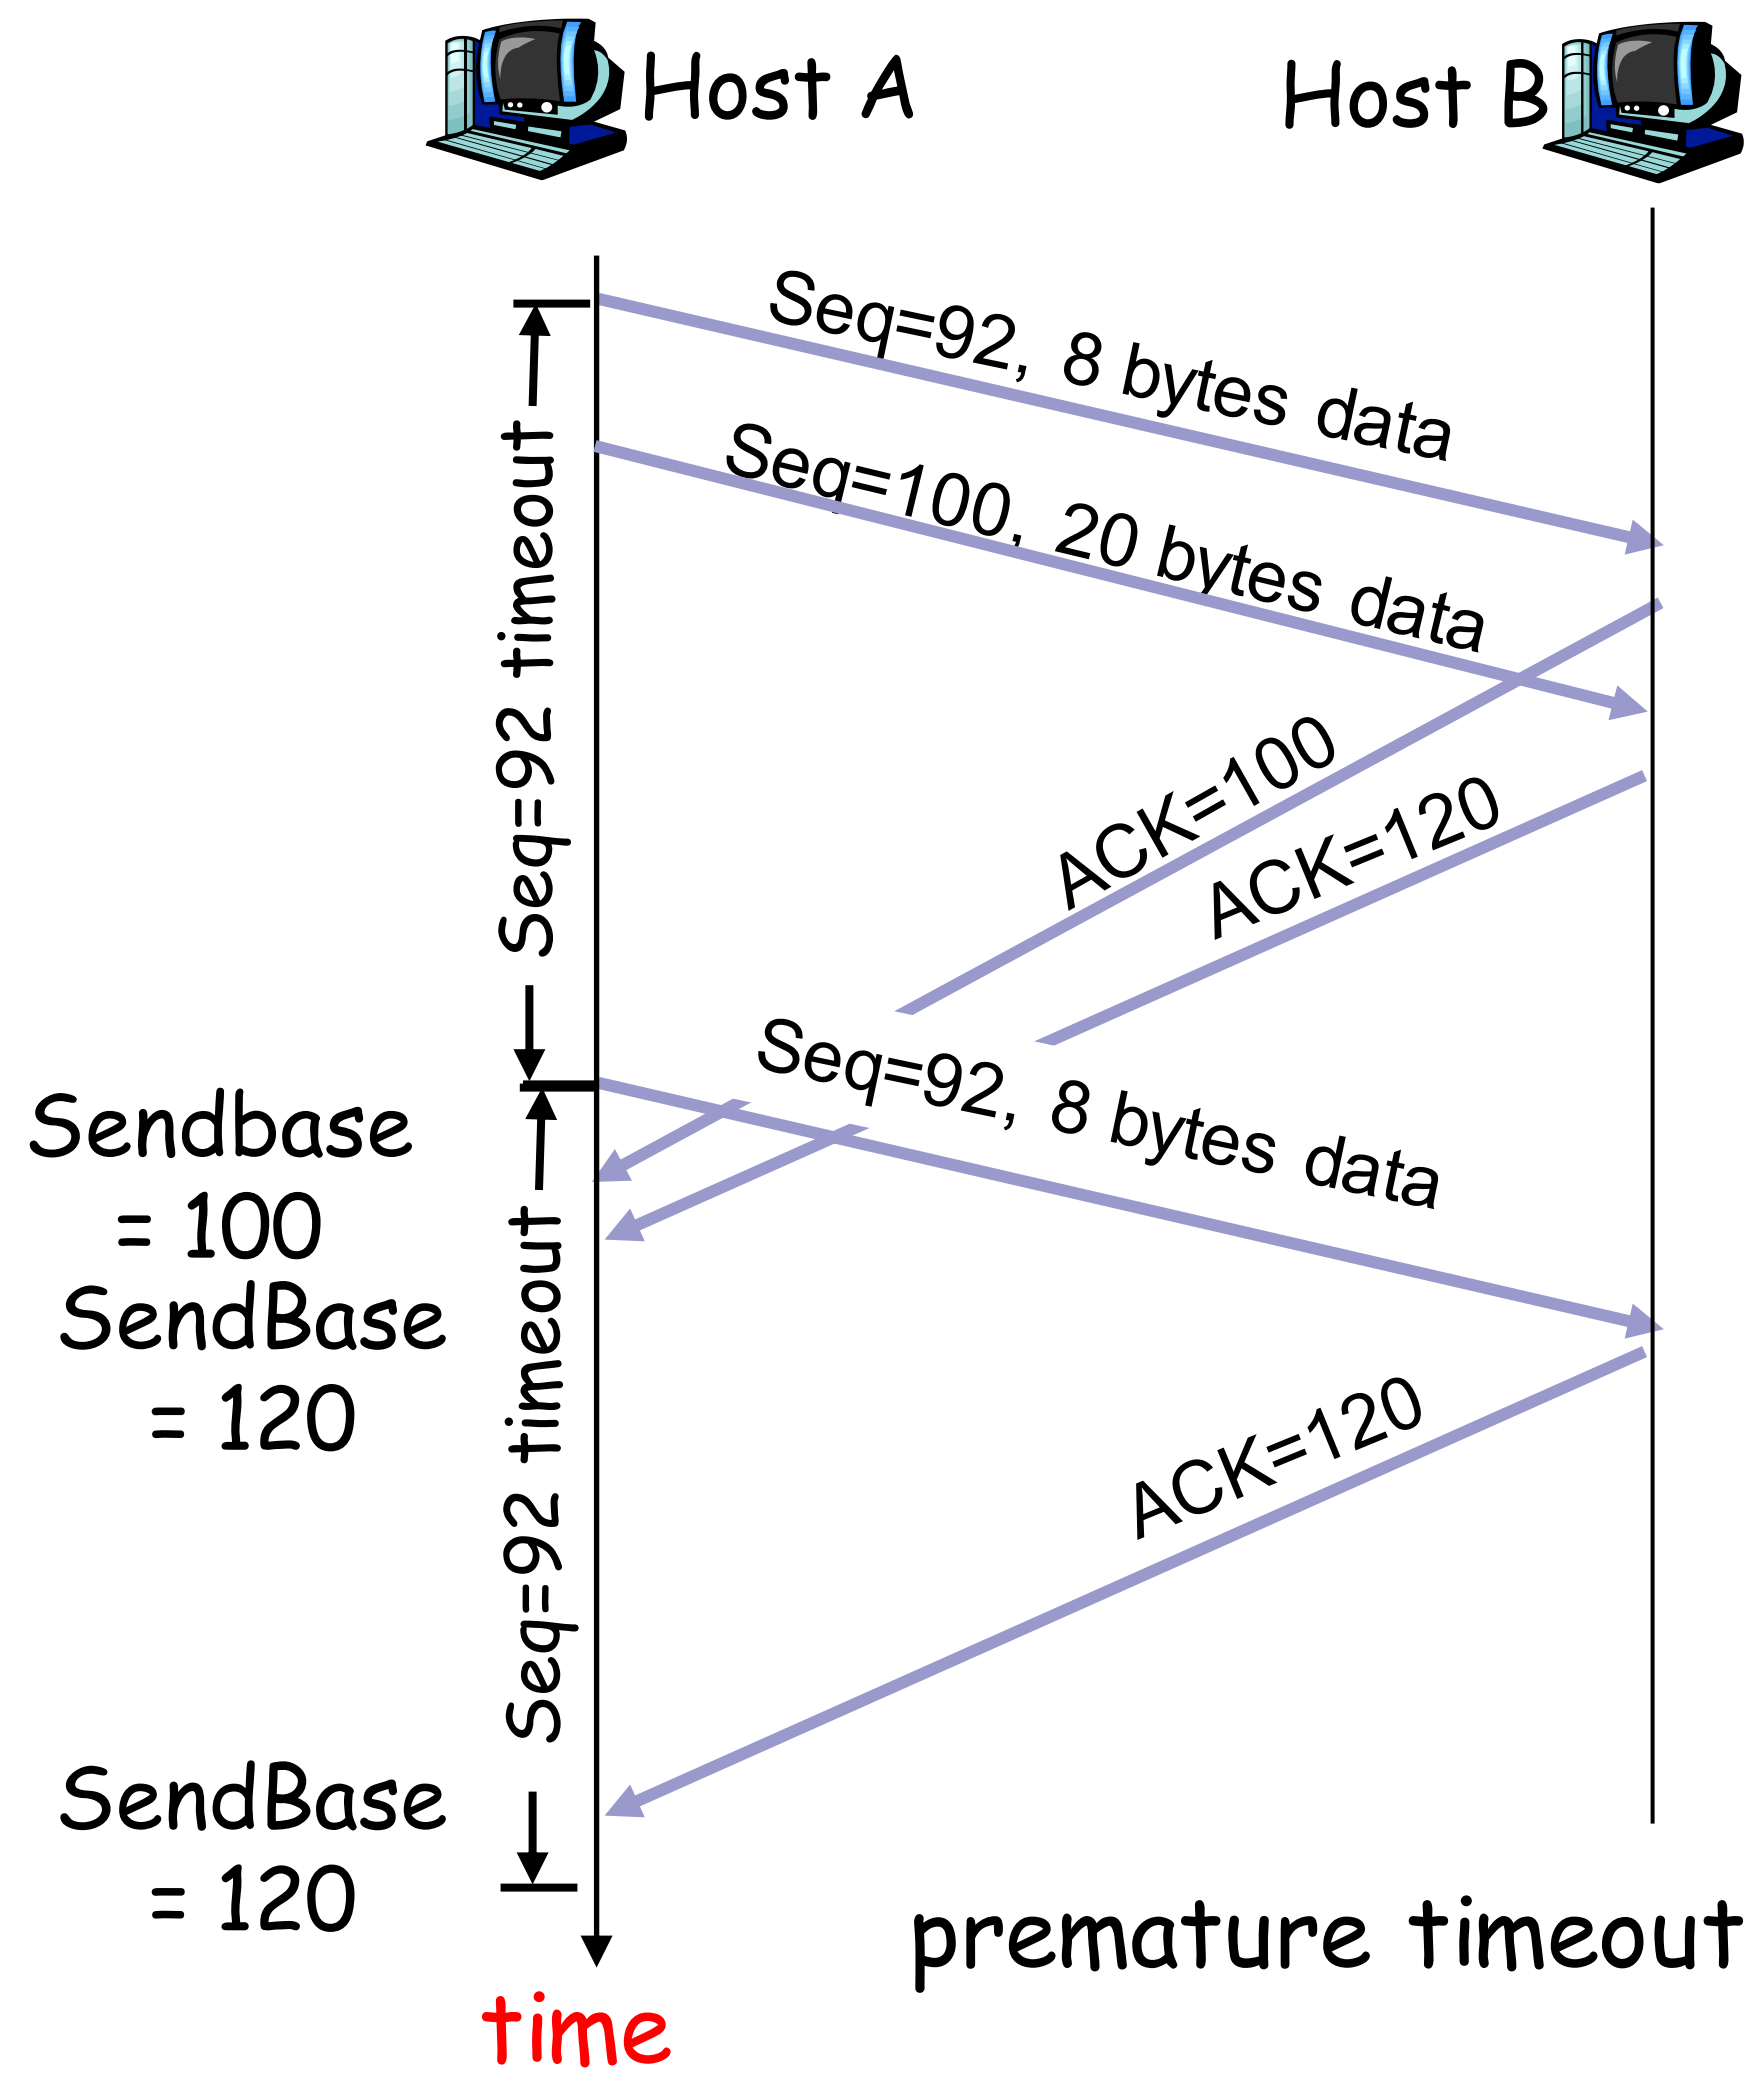

premature timeout

TCP retransmission scenarios (more)

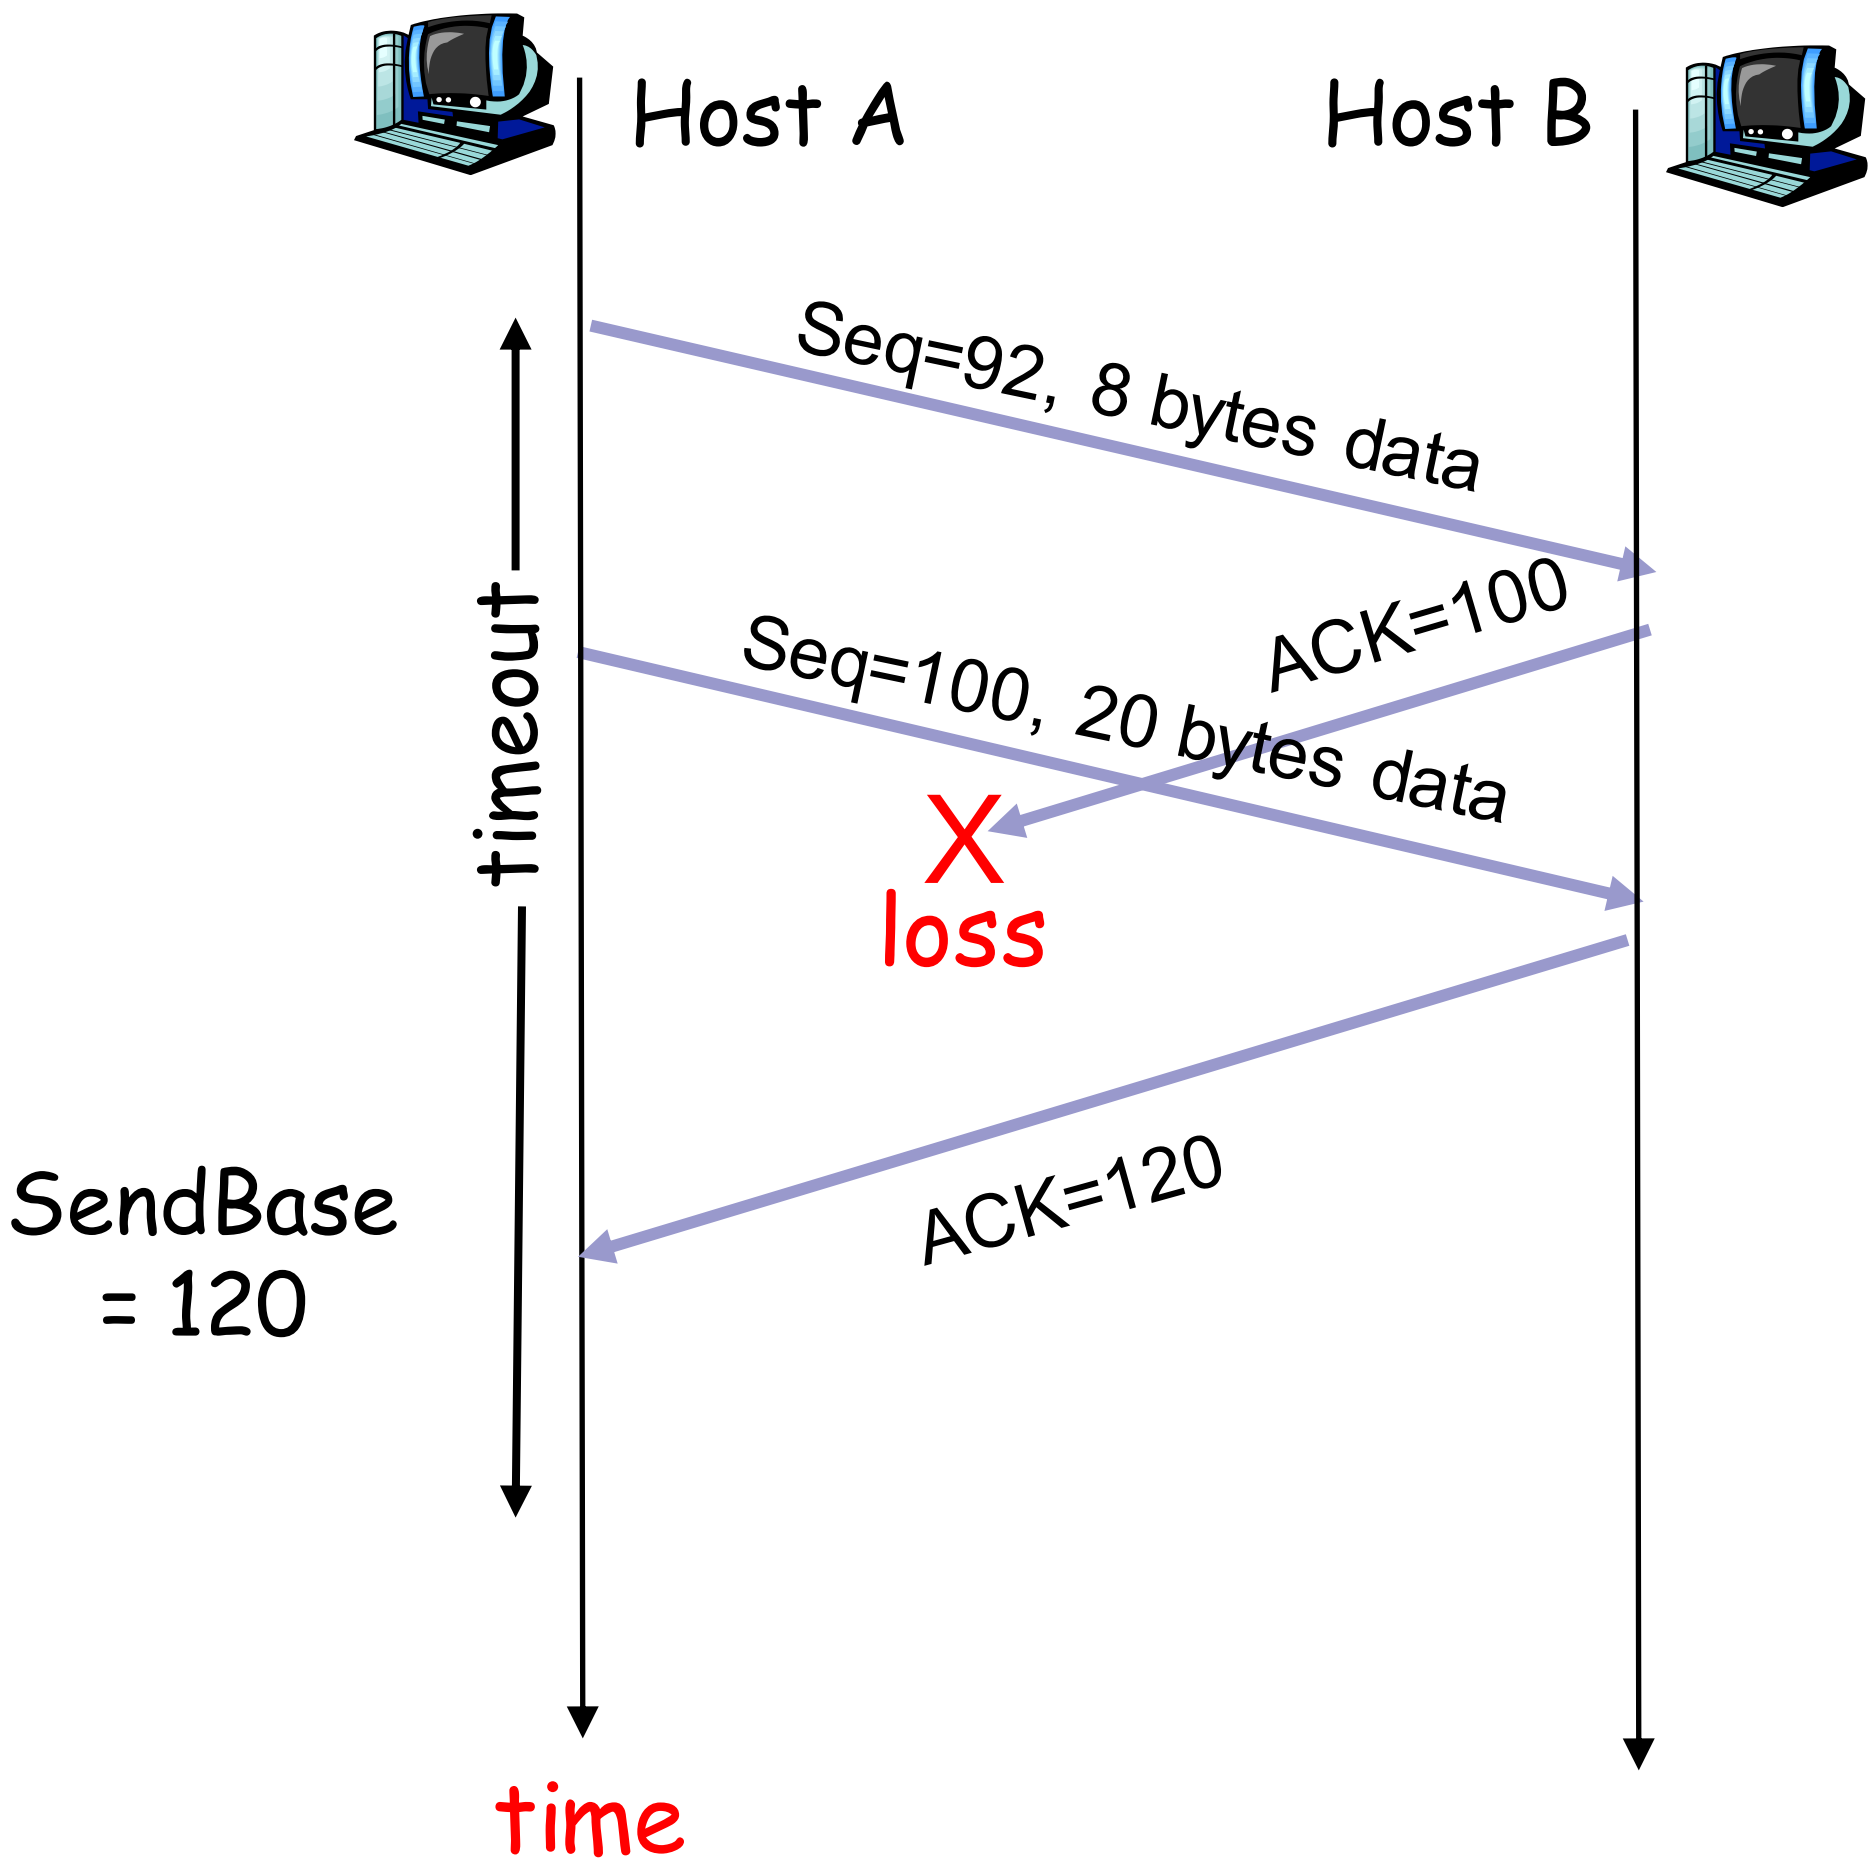

Cumulative ACK scenario

TCP ACK generation [RFC 1122, RFC 2581]

Event at Receiver	TCP Receiver action
Arrival of in-order segment with expected seq #. All data up to expected seq # already ACKed	Delayed ACK. Wait up to 500ms for next segment. If no next segment, send ACK
Arrival of in-order segment with expected seq #. One other segment has ACK pending	Immediately send single cumulative ACK, ACKing both in-order segments
Arrival of out-of-order segment higher-than-expect seq. # . Gap detected	Immediately send duplicate ACK, indicating seq. # of next expected byte
Arrival of segment that partially or completely fills gap	Immediate send ACK, provided that segment starts at lower end of gap

Fast Retransmit

- Time-out period often relatively long:
  - long delay before resending lost packet
- Detect lost segments via duplicate ACKs.
  - Sender often sends many segments back-to-back
  - If segment is lost, there will likely be many duplicate ACKs.
- If sender receives 3 ACKs for the same data, it supposes that segment after ACKed data was lost:
  - fast retransmit: resend segment before timer expires

Fast retransmit algorithm:

```
event: ACK received, with ACK field value of y
          if (y > SendBase) {
              SendBase = y
              if (there are currently not-yet-acknowledged segments)
                  start timer
            }
          else {
               increment count of dup ACKs received for y
               if (count of dup ACKs received for y = 3) {
                   resend segment with sequence number y
               }
```

a duplicate ACK for already ACKed segment

fast retransmit

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

TCP Flow Control

- receive side of TCP connection has a receive buffer:

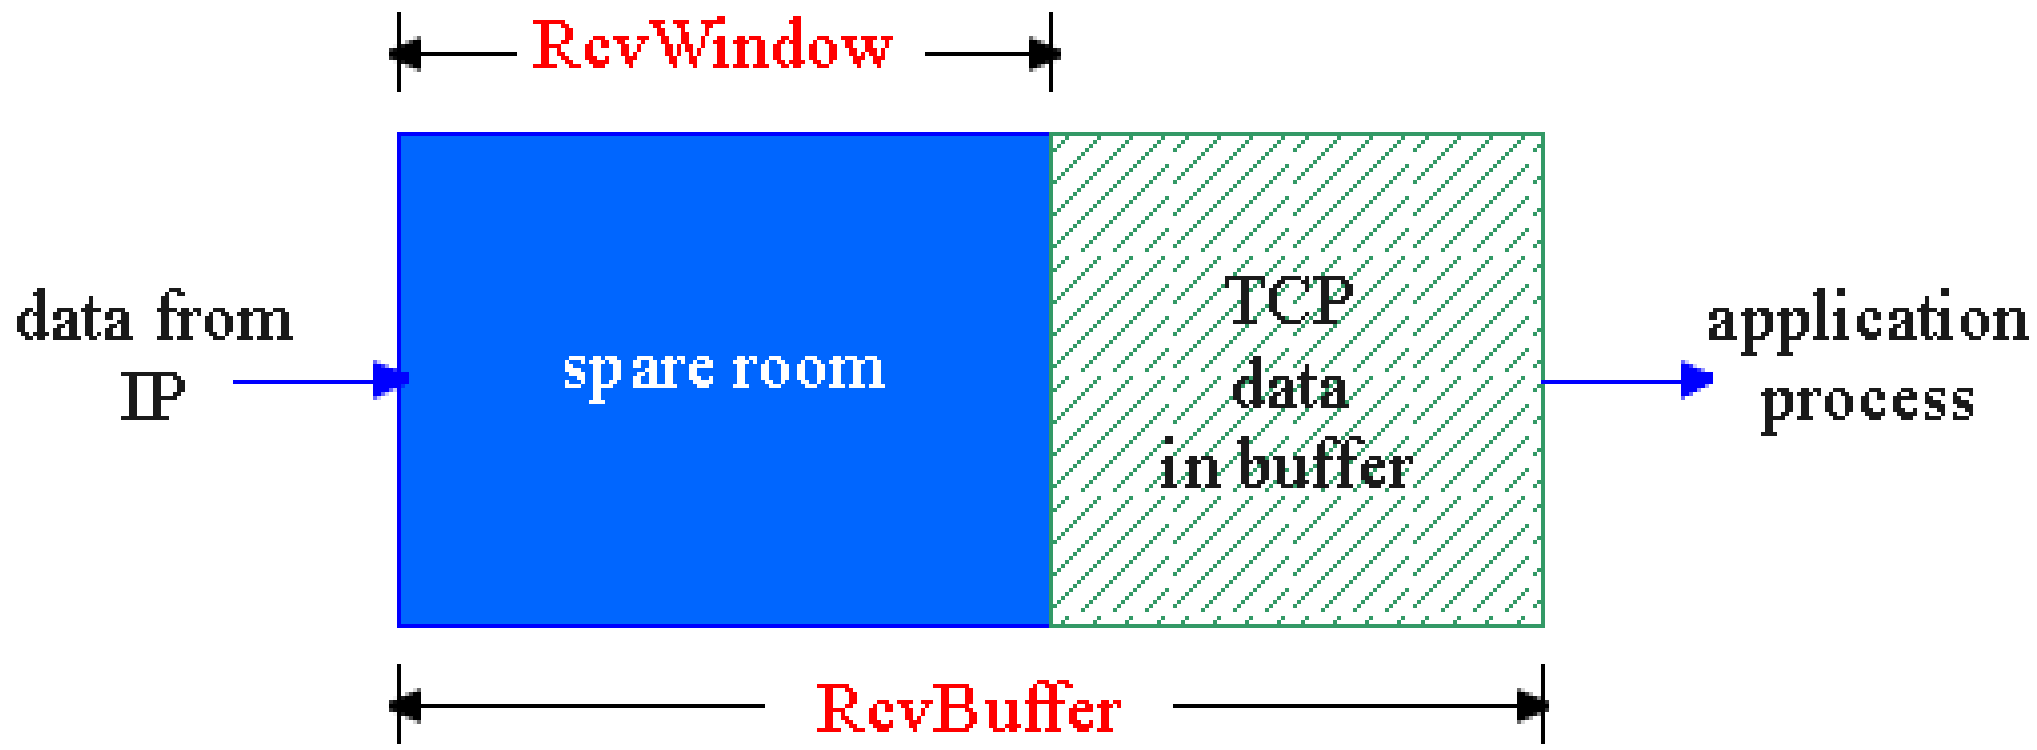

- app process may be slow at reading from buffer

flow control

sender won't overflow receiver's buffer by transmitting too much, too fast

- speed-matching service: matching the send rate to the receiving app's drain rate

TCP Flow control: how it works

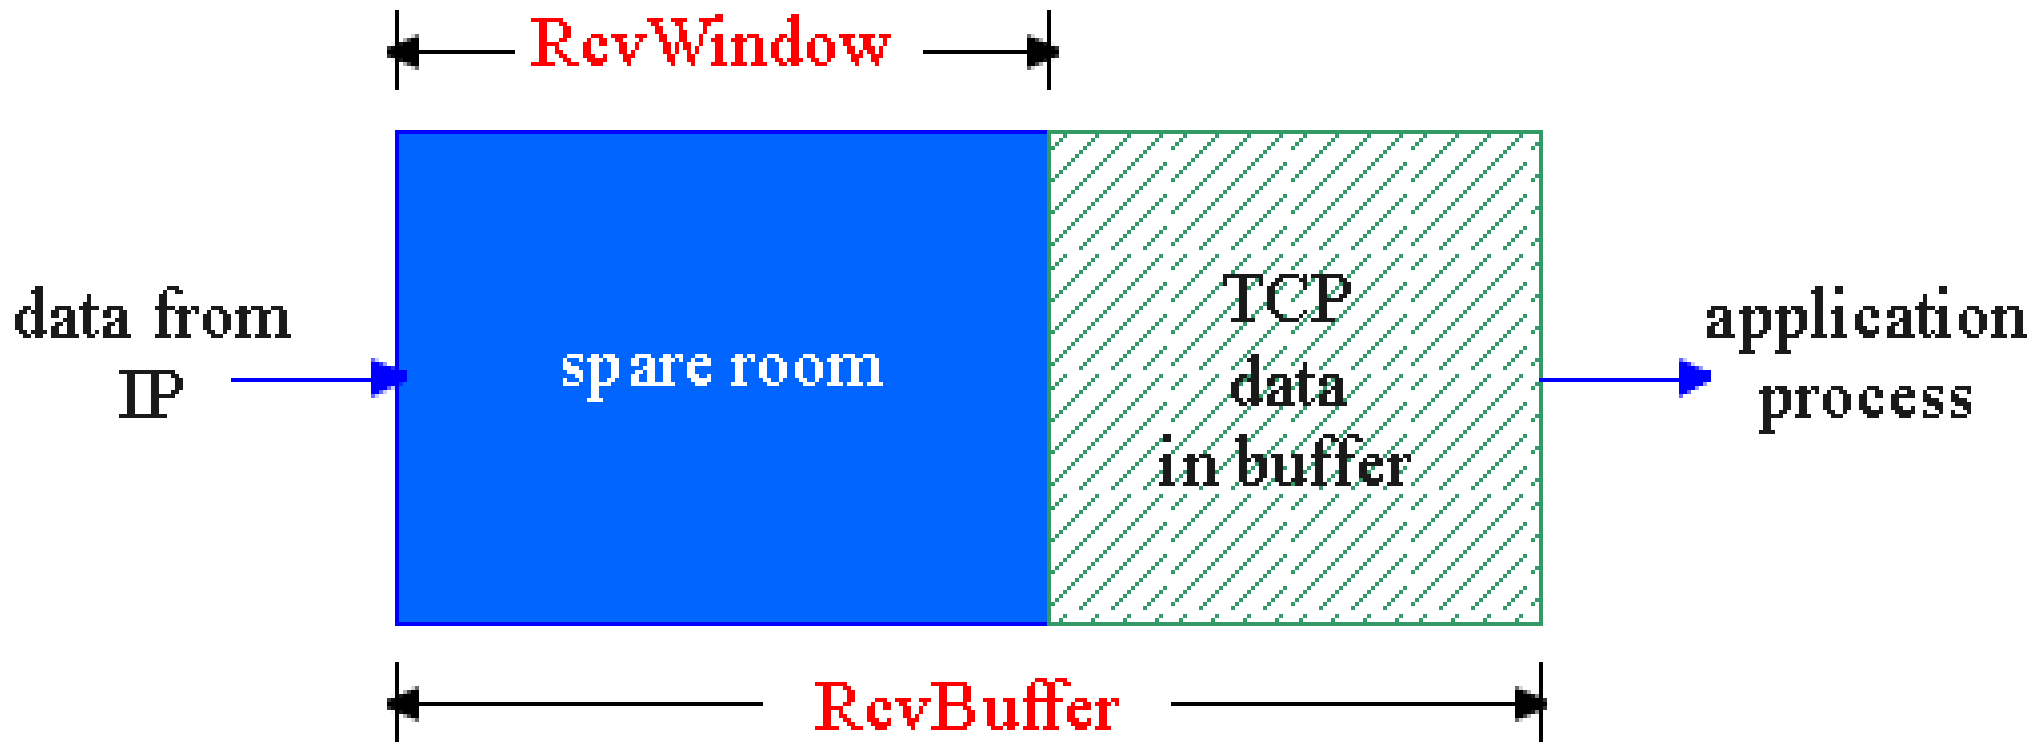

(Suppose TCP receiver discards out-of-order segments)

- spare room in buffer

= `RcvWindow`

= `RcvBuffer-[LastByteRcvd - LastByteRead]`

- Rcvr advertises spare room by including value of **`RcvWindow`** in segments
- Sender limits unACKed data to **`RcvWindow`**
  - guarantees receive buffer doesn't overflow

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

TCP Connection Management

Recall: TCP sender, receiver establish "connection" before exchanging data segments

- initialize TCP variables:
  - seq. #s
  - buffers, flow control info (e.g. **`RcvWindow`**)
- *client:* connection initiator

```
Socket clientSocket = new
 Socket("hostname","port
 number");
```

- *server:* contacted by client

```
Socket connectionSocket =
 welcomeSocket.accept();
```

Three way handshake:

Step 1: client host sends TCP SYN segment to server
- specifies initial seq #
- no data

Step 2: server host receives SYN, replies with SYNACK segment
- server allocates buffers
- specifies server initial seq. #

Step 3: client receives SYNACK, replies with ACK segment, which may contain data

Three-Way Handshake

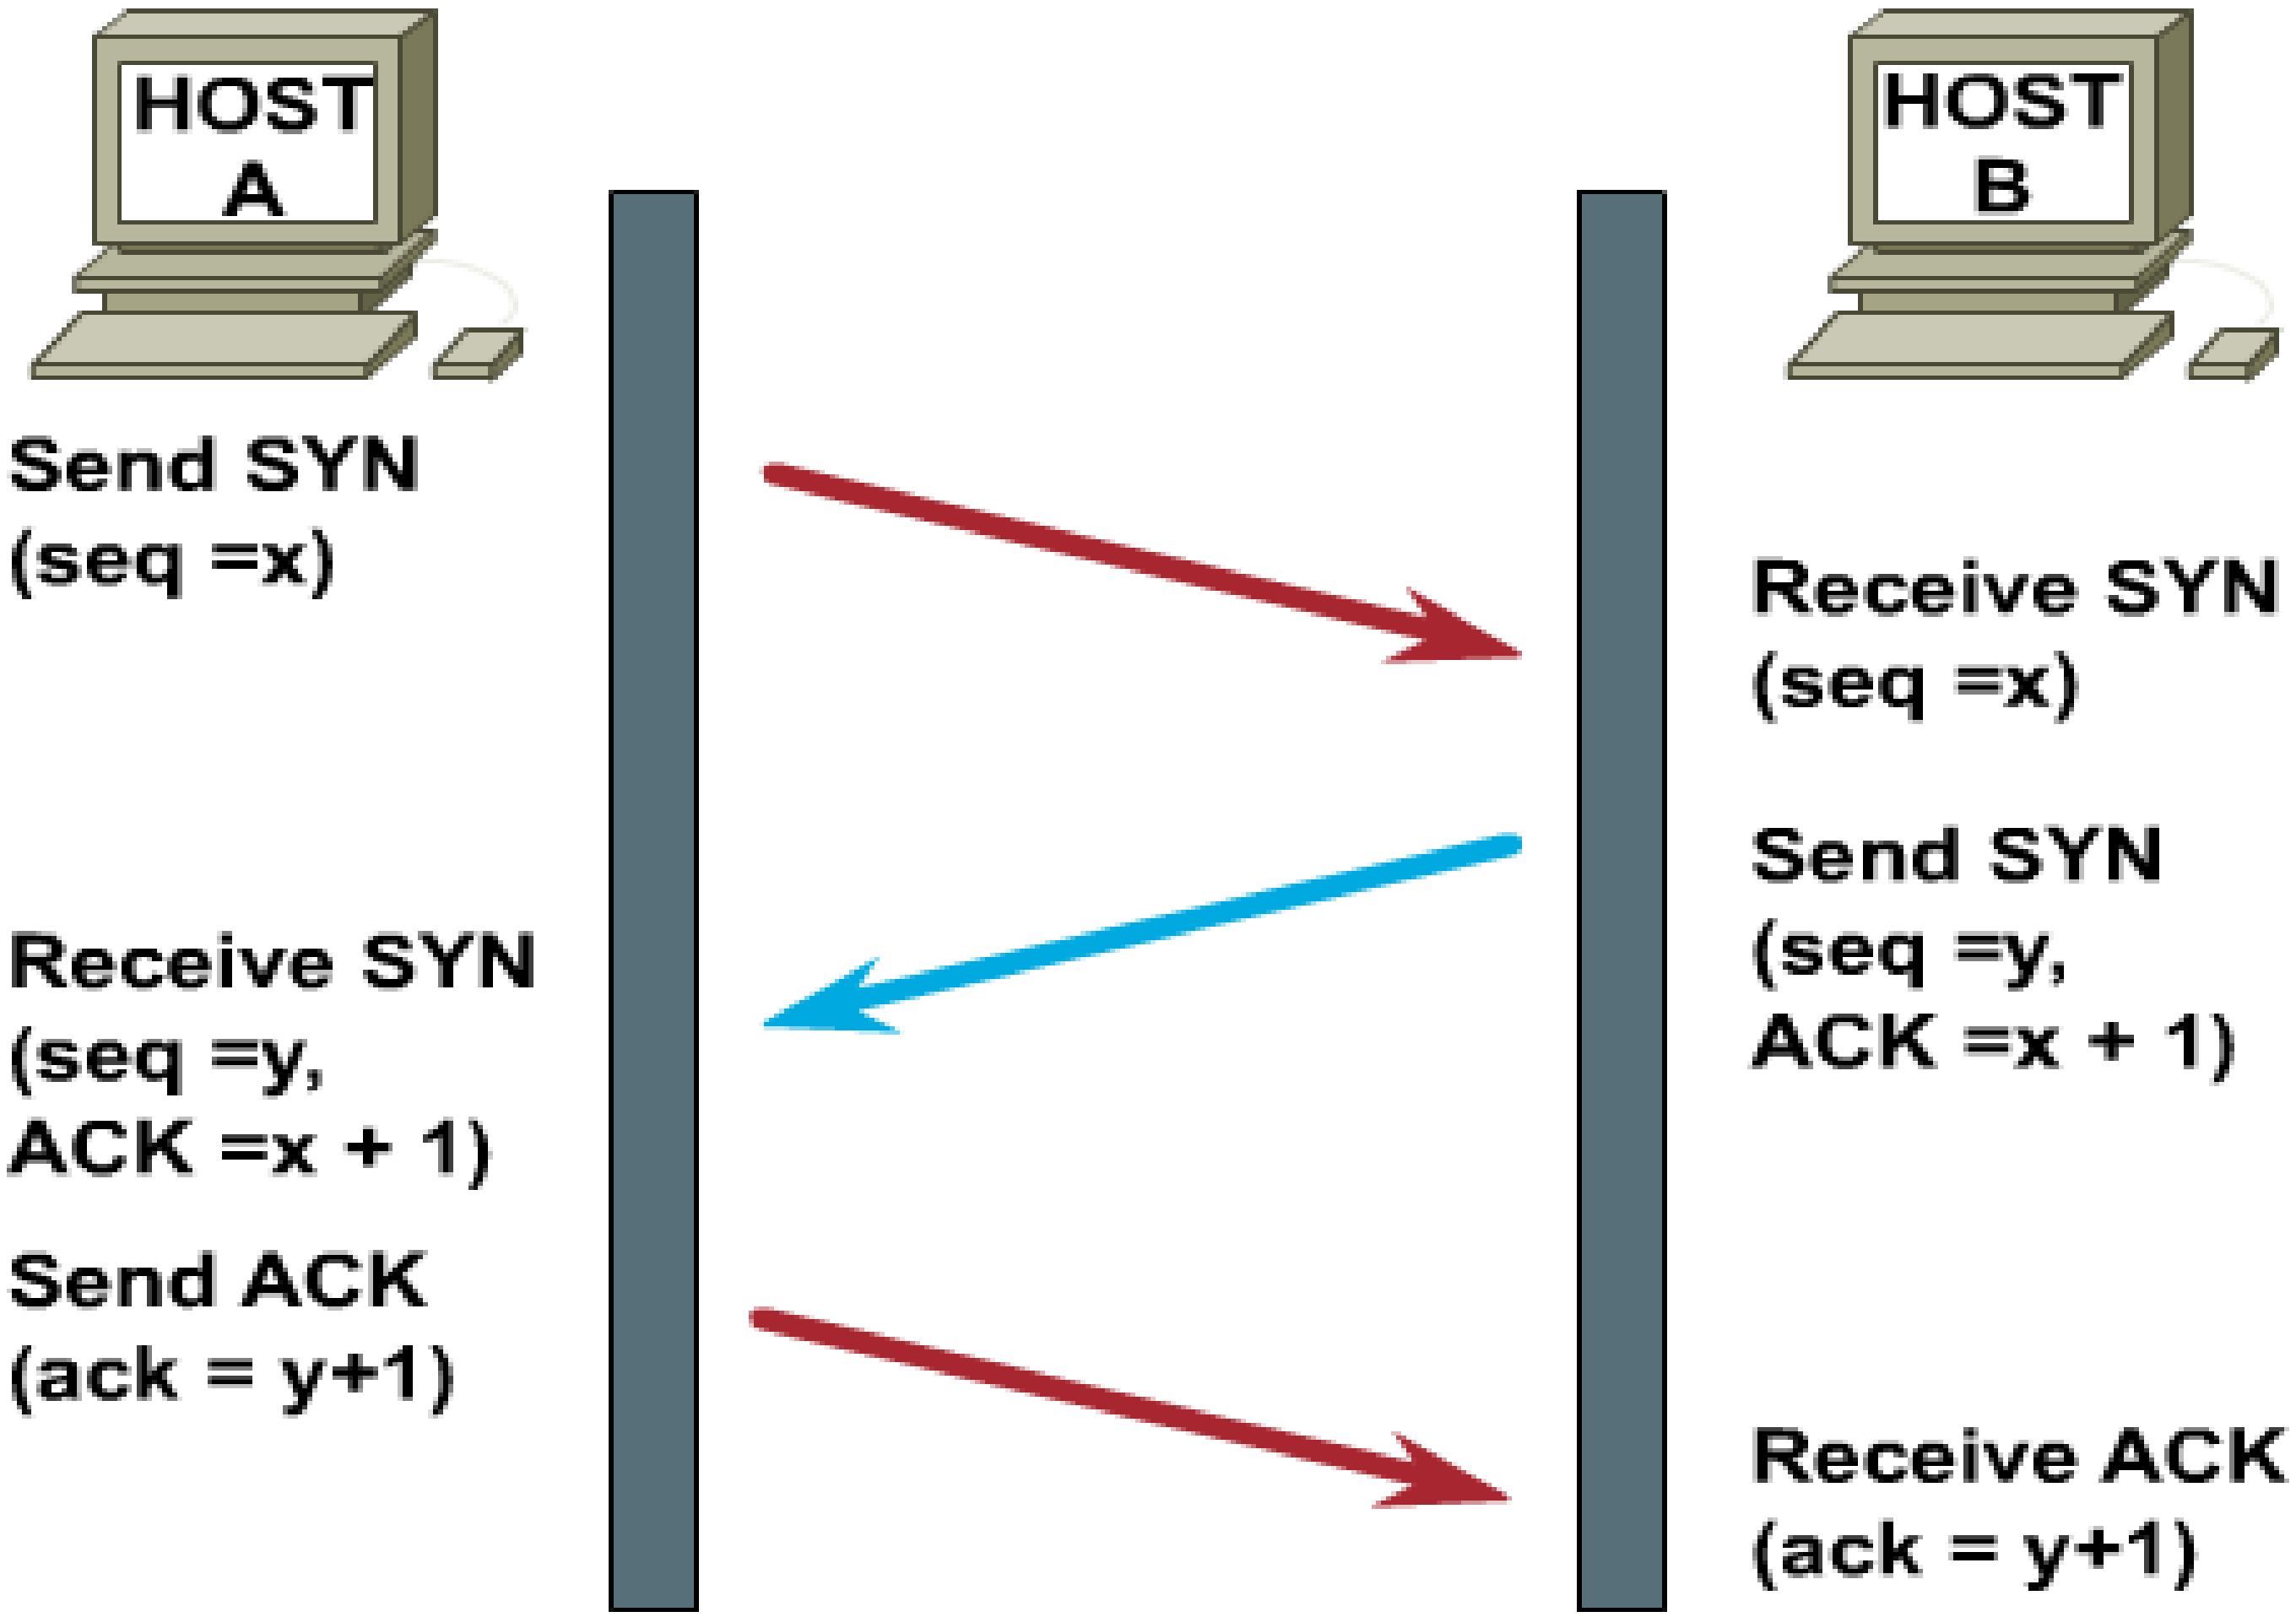

TCP Connection Management (cont.)

Closing a connection:

client closes socket: `clientSocket.close();`

Step 1: client end system sends TCP FIN control segment to server

Step 2: server receives FIN, replies with ACK. Closes connection, sends FIN.

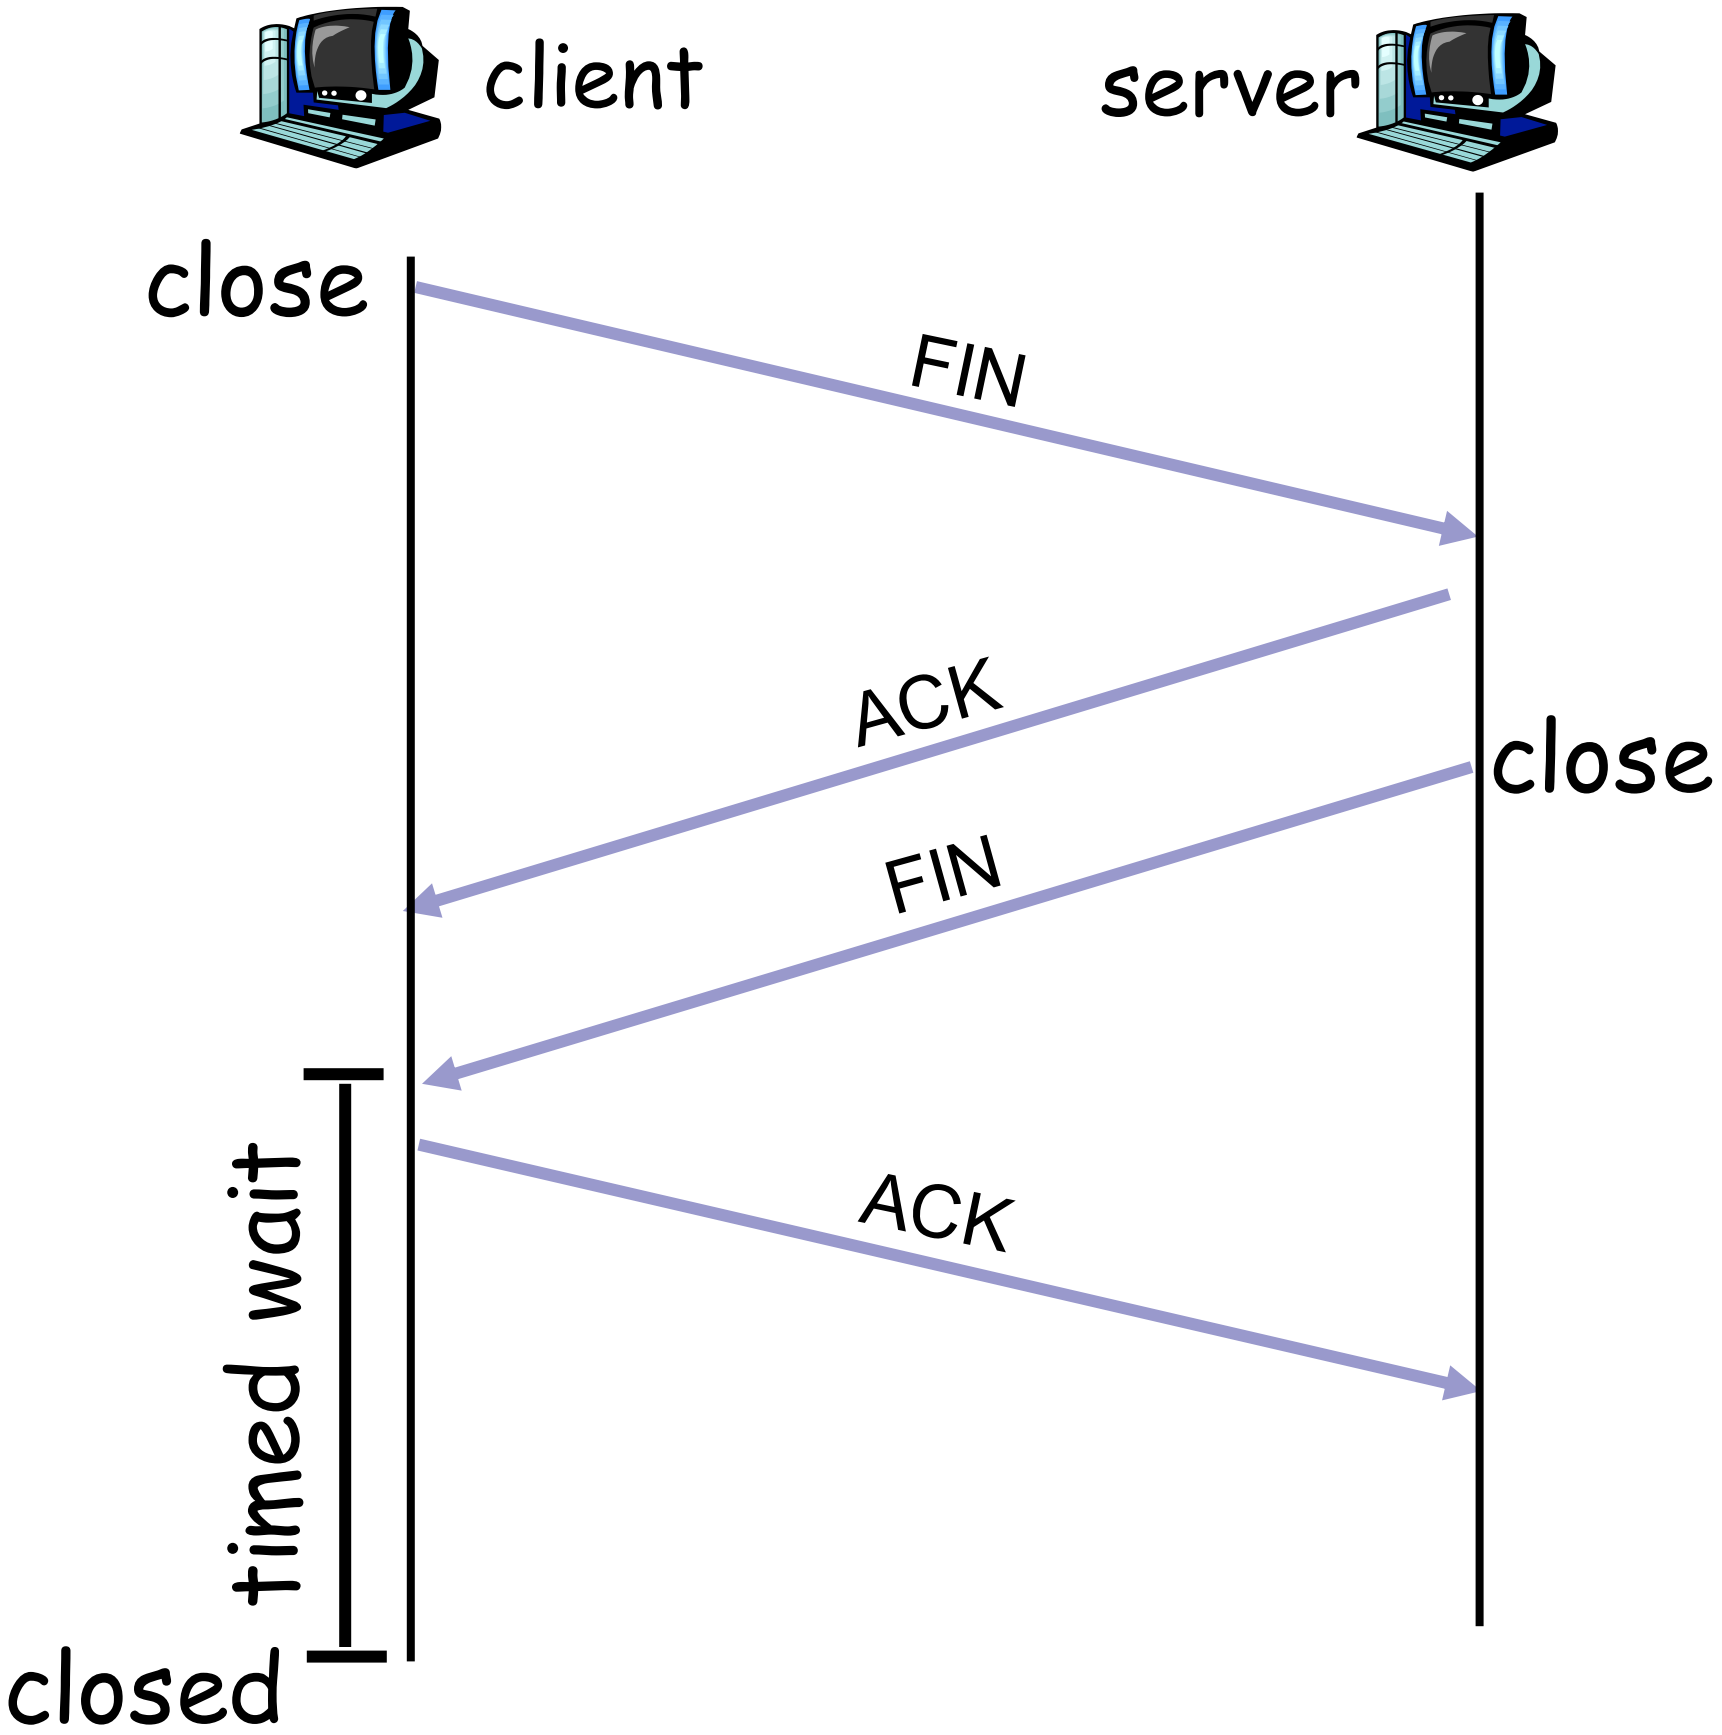

TCP Connection Management (cont.)

Step 3: client receives FIN, replies with ACK.

- Enters "timed wait" - will respond with ACK to received FINs

Step 4: server, receives ACK. Connection closed.

Note: with small modification, can handle simultaneous FINs.

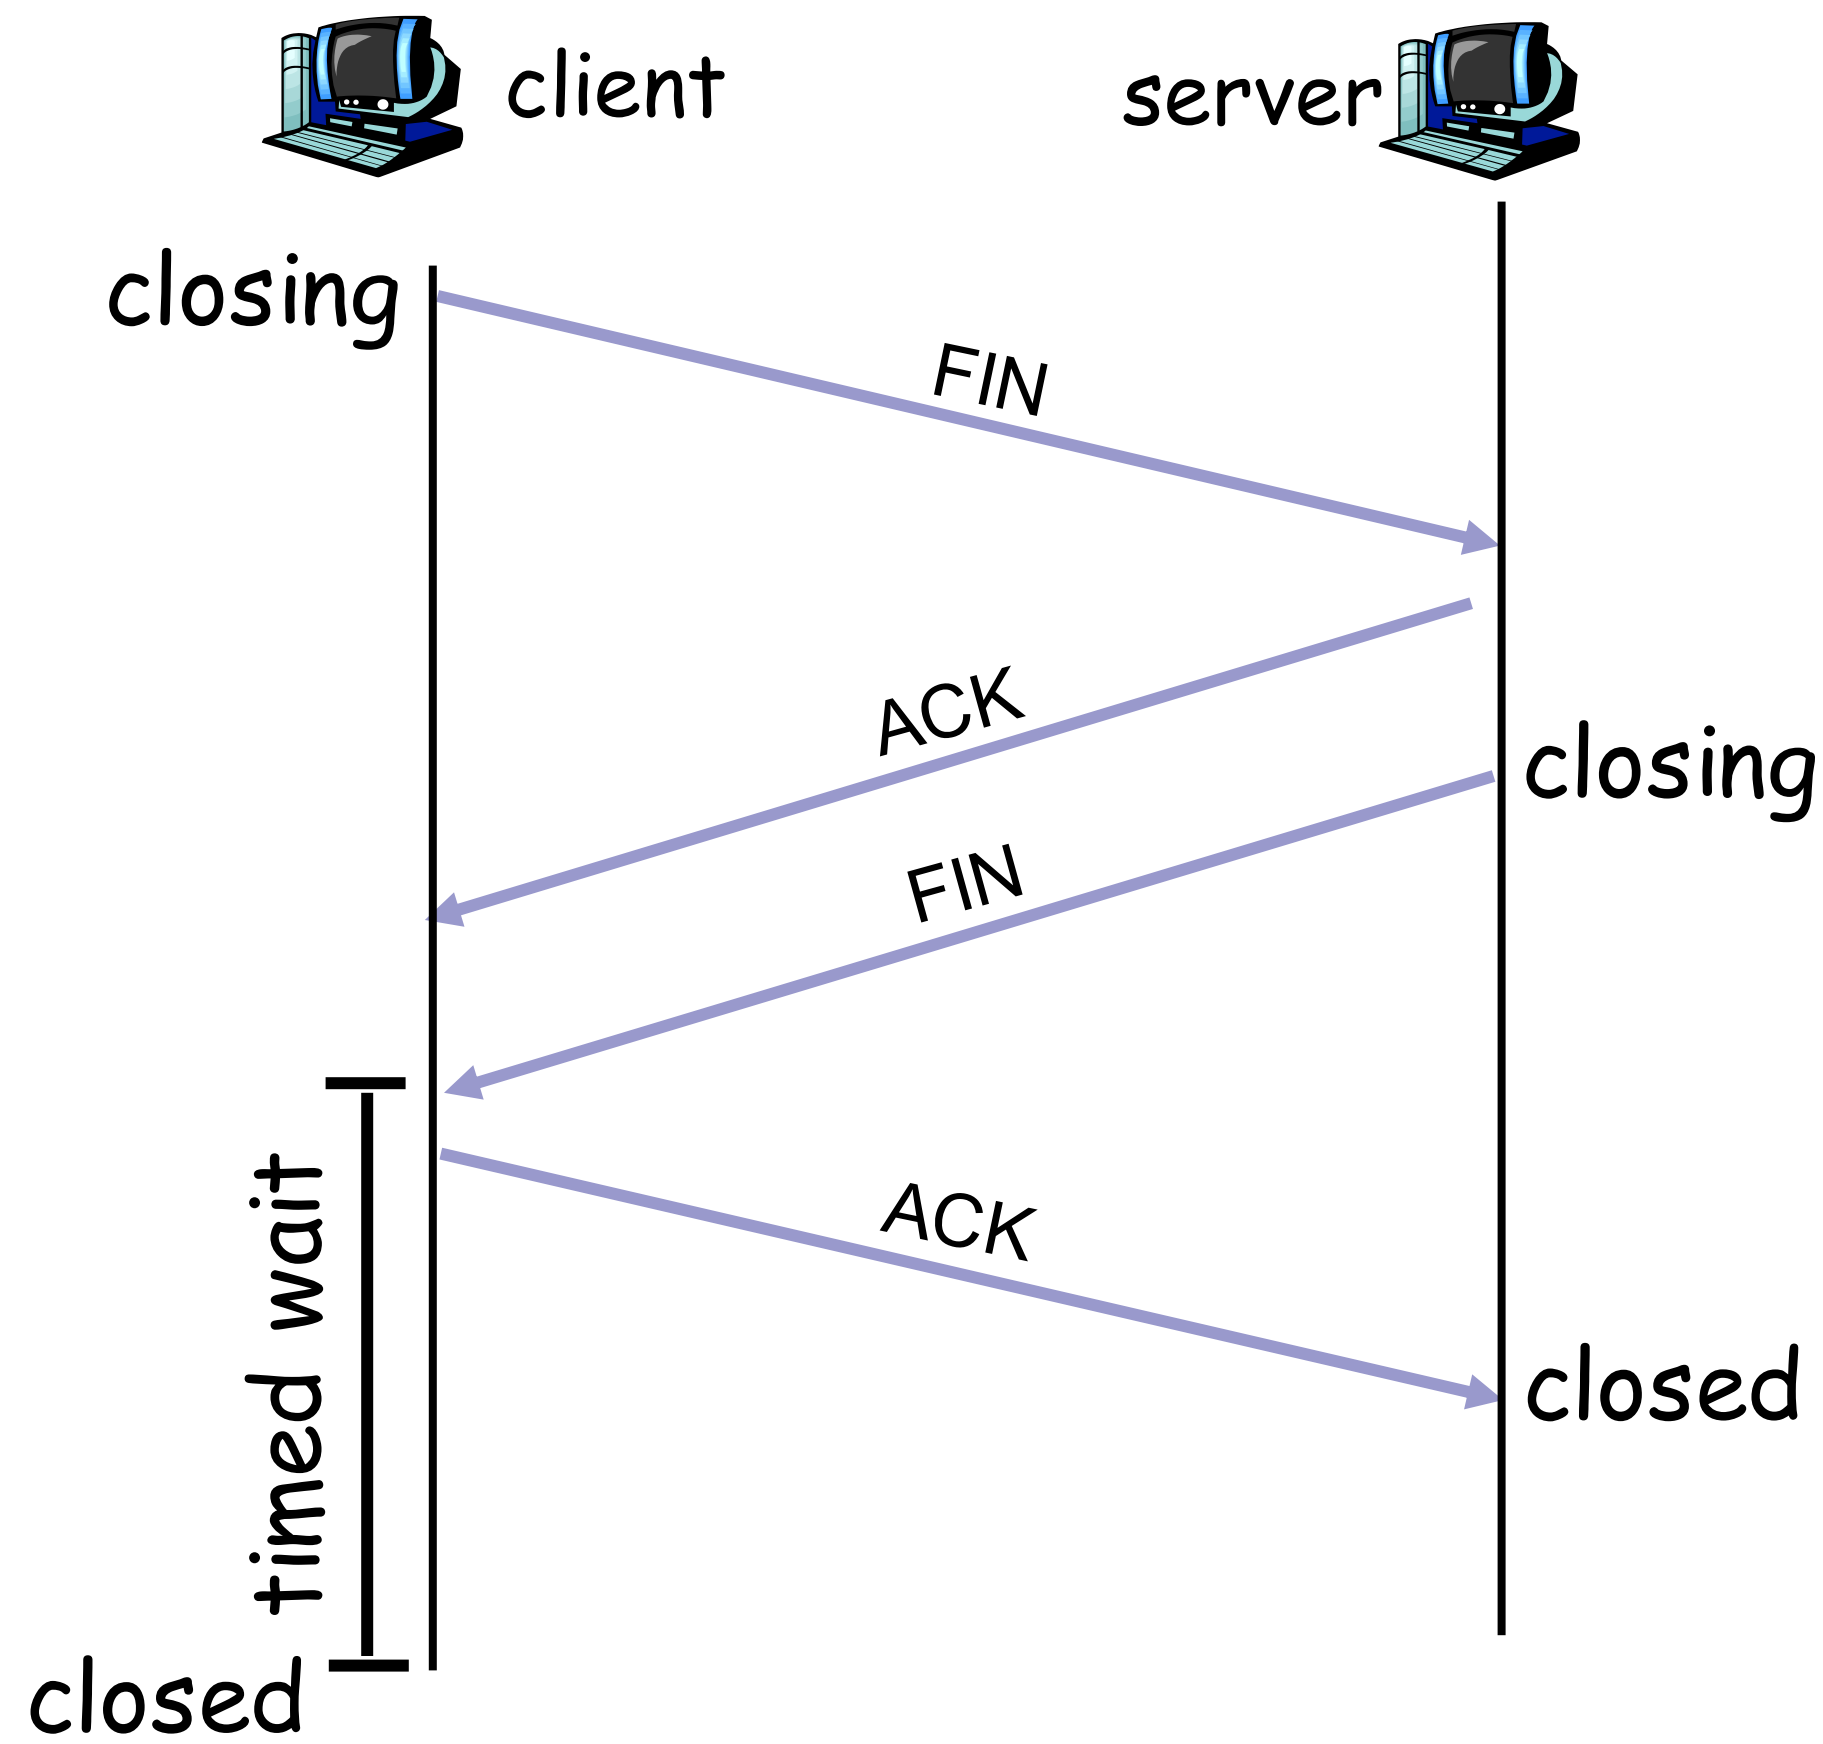

TCP Connection Management (cont)

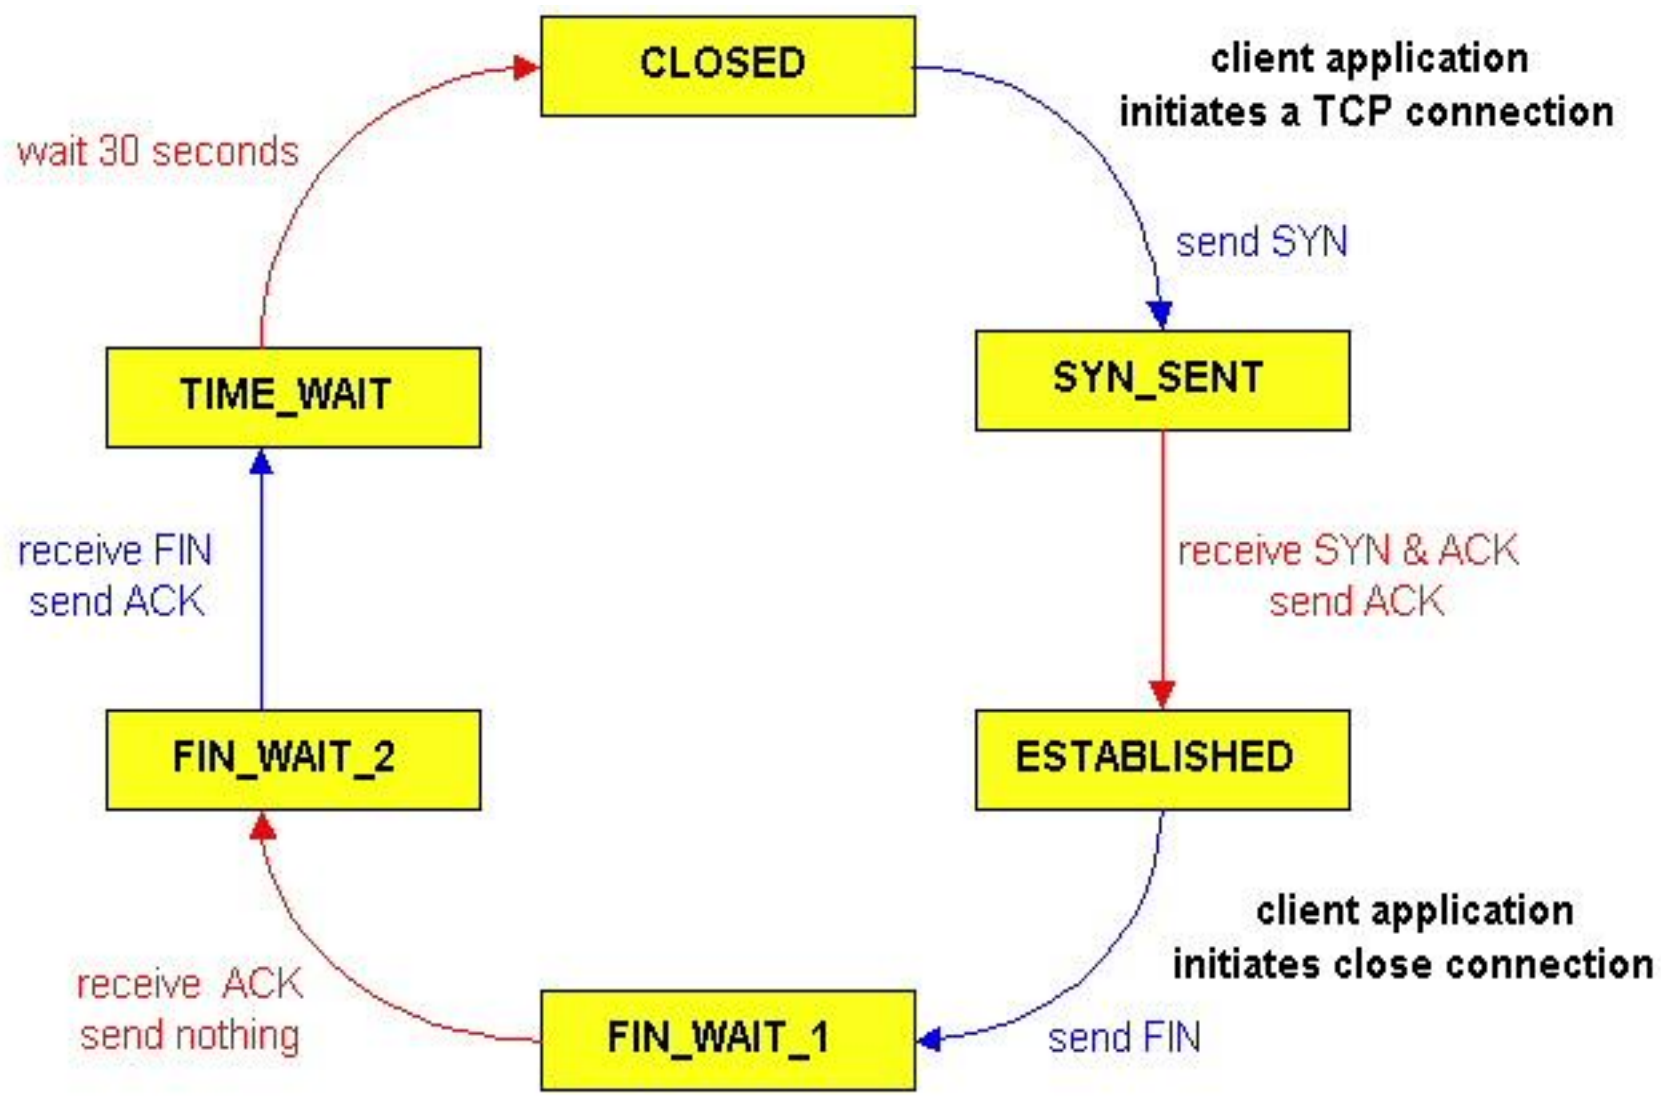

TCP client lifecycle

TCP server lifecycle

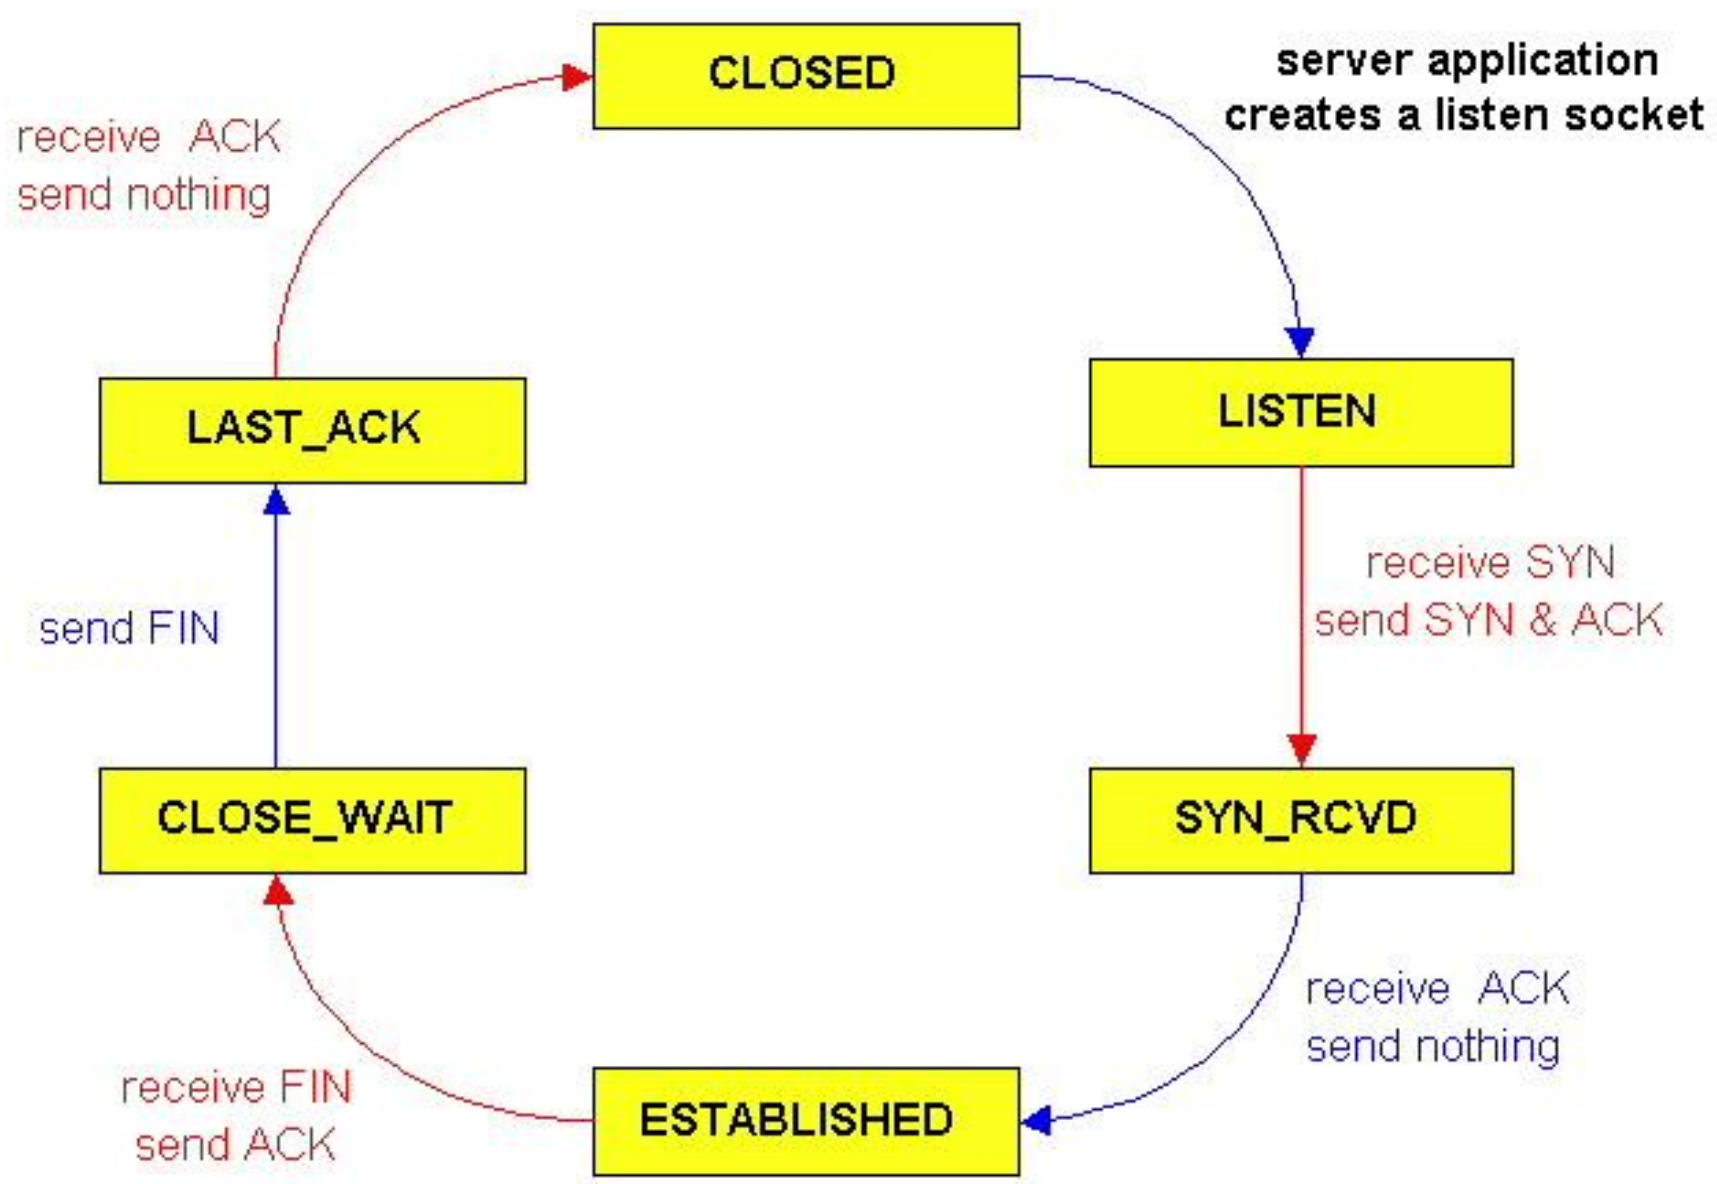

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

Principles of Congestion Control

Congestion:

- informally: “too many sources sending too much data too fast for *network* to handle”
- different from flow control!
- Manifestations:مظاهر
  - lost packets (buffer overflow at routers)
  - long delays (queueing in router buffers)
- a top-10 problem!

Causes/costs of congestion: scenario 1

- two senders, two receivers
- one router, infinite buffers
- no retransmission

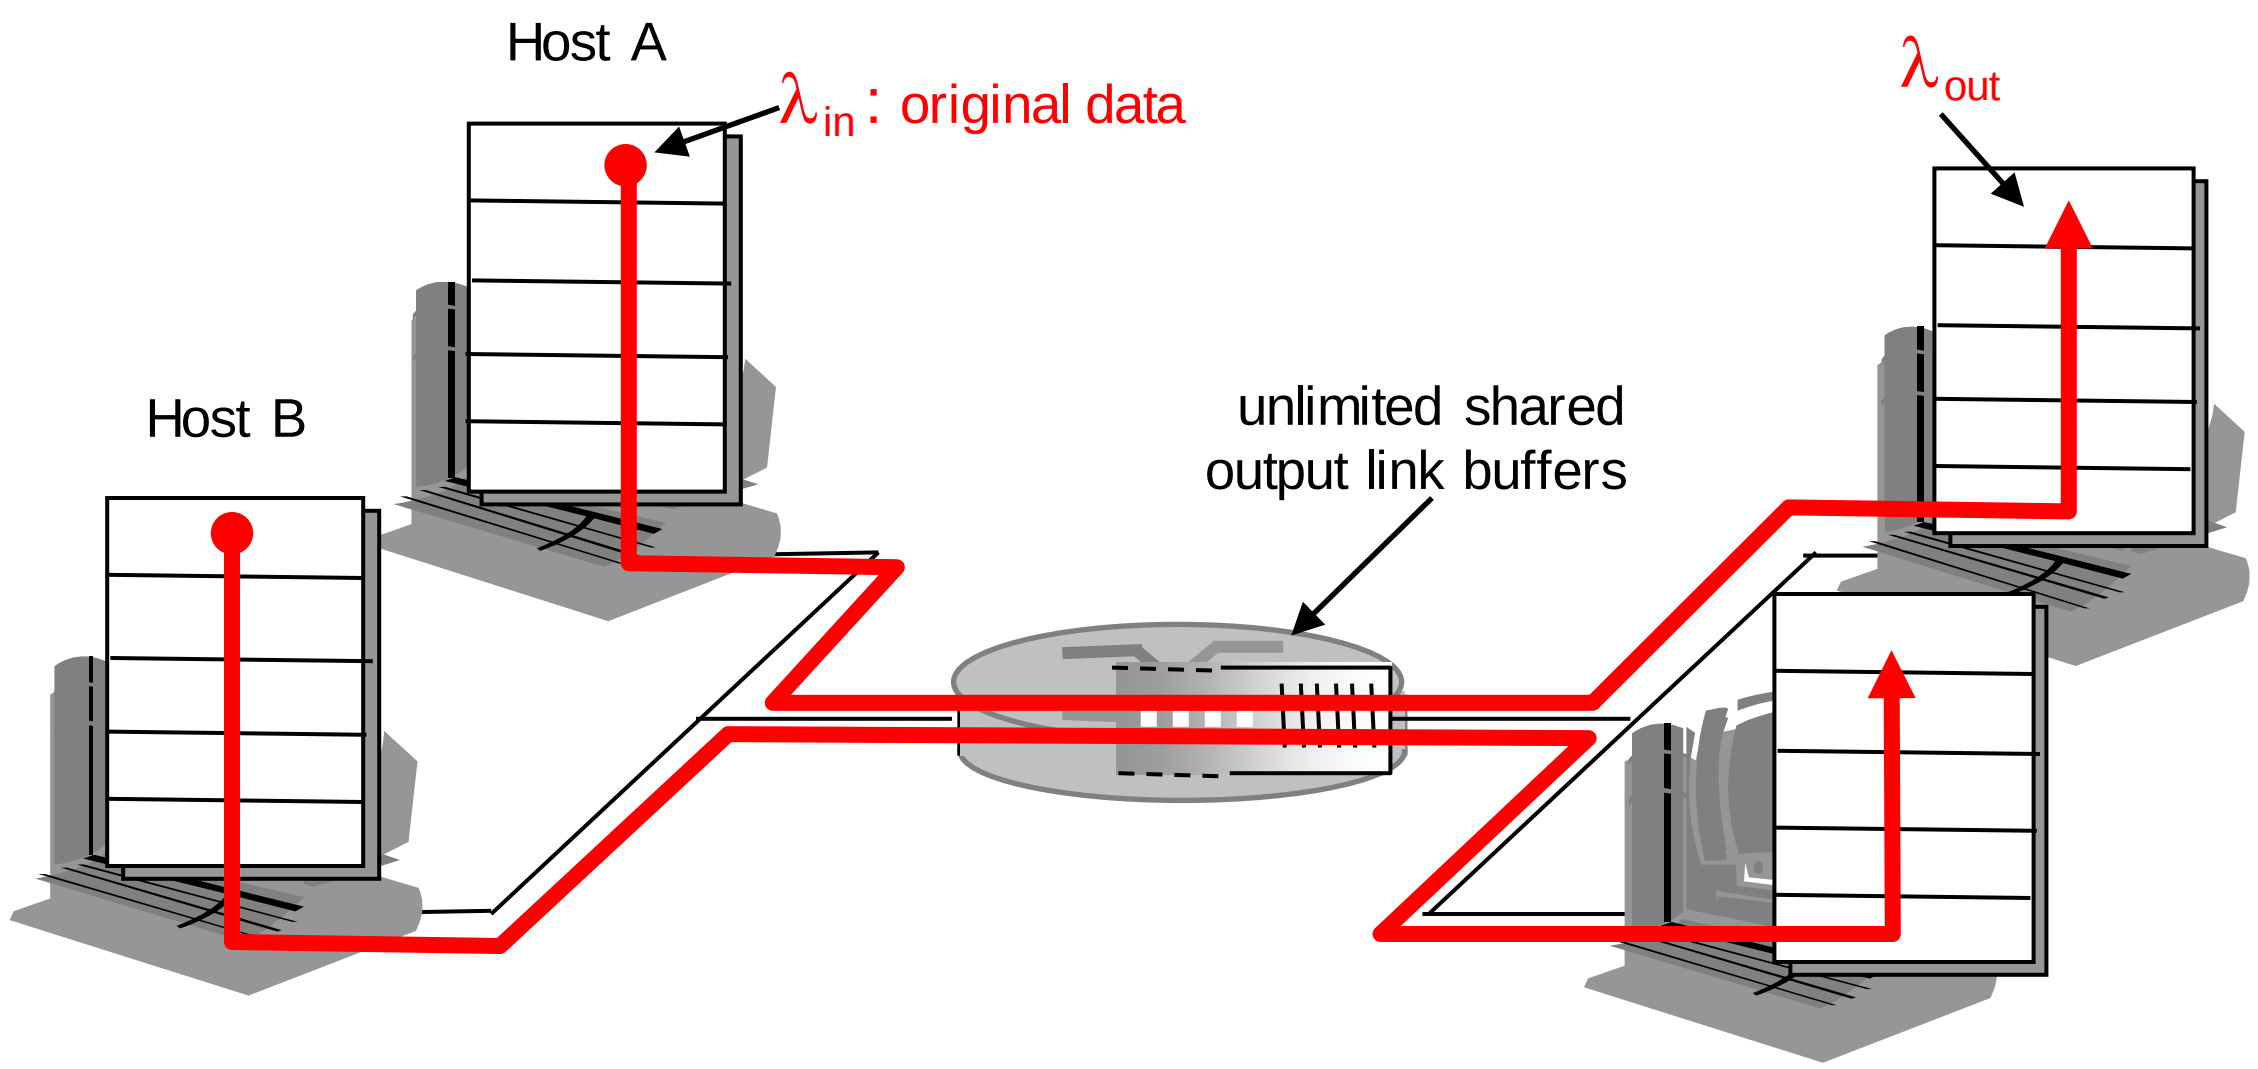

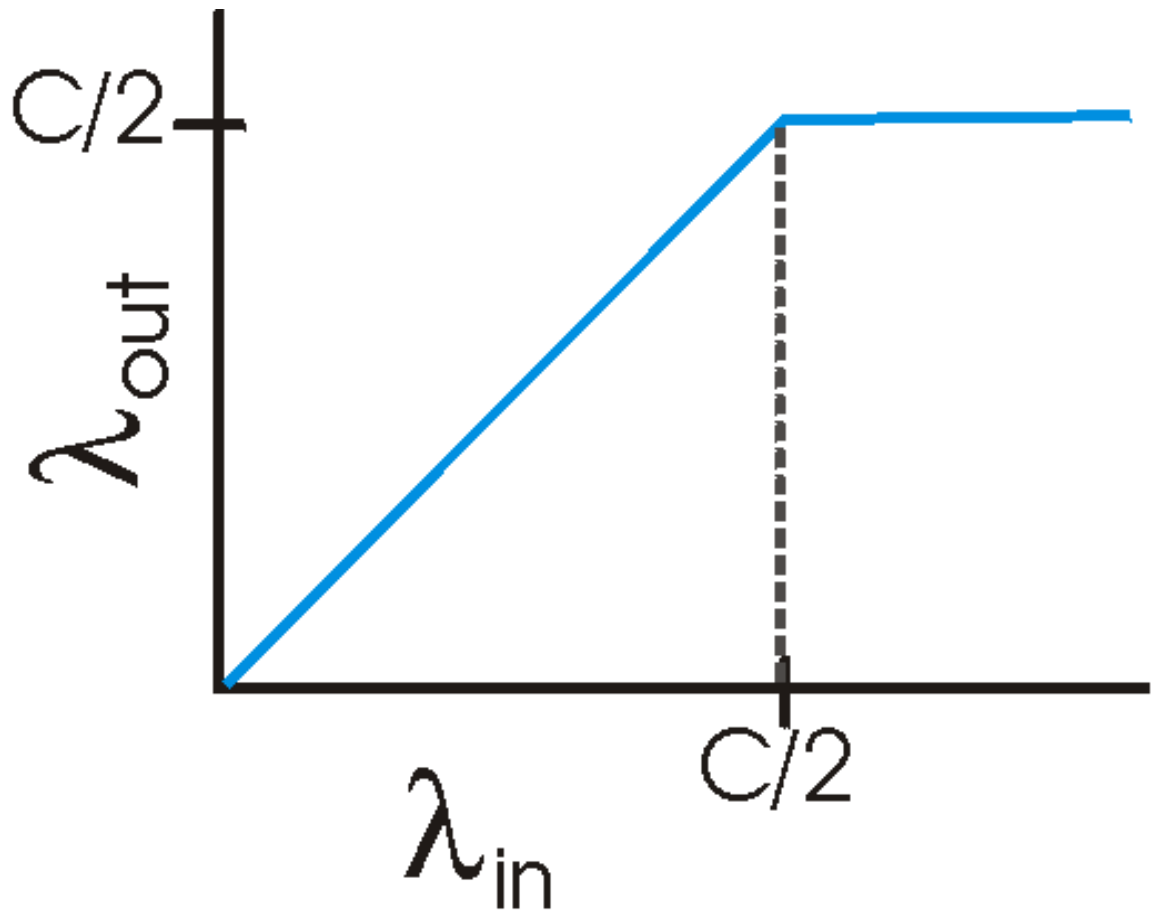

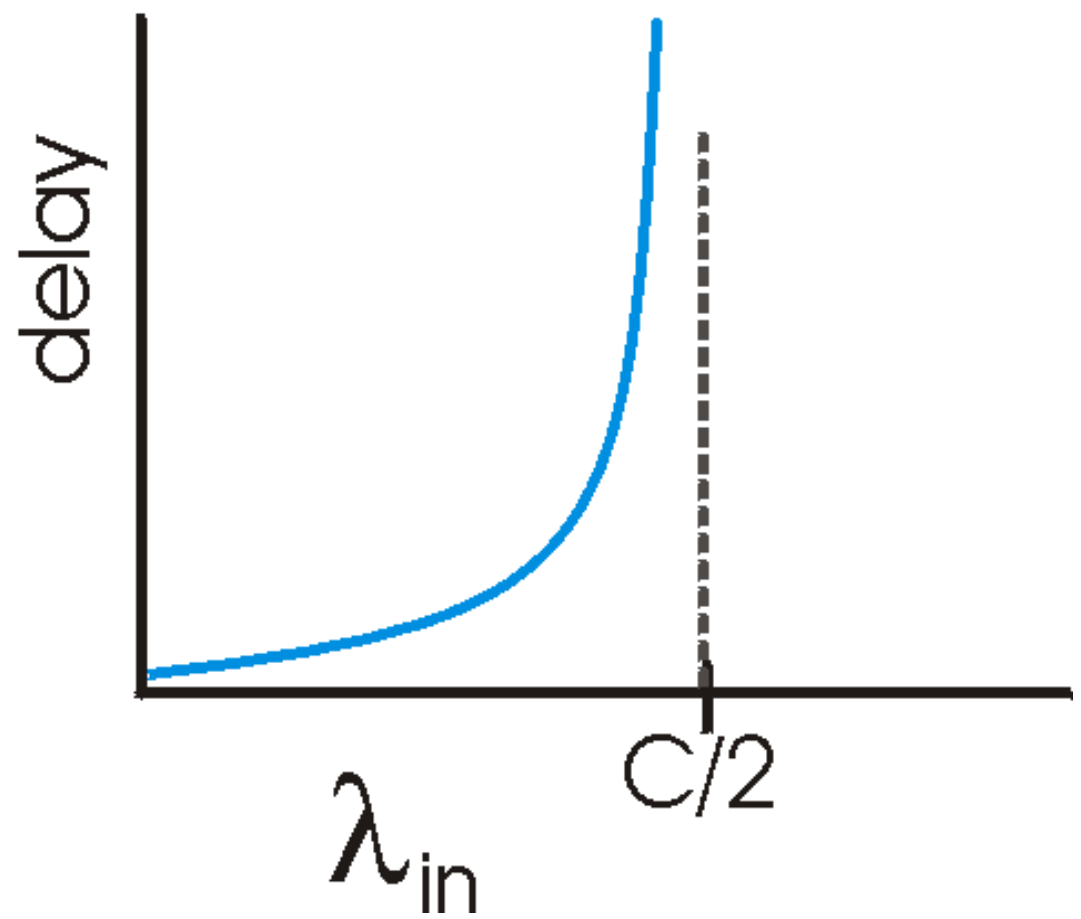

- large delays when congested
- maximum achievable throughput

Causes/costs of congestion: scenario 2

- one router, *finite* buffers
- sender retransmission of lost packet
- unneeded retransmissions: link carries multiple copies of pkt

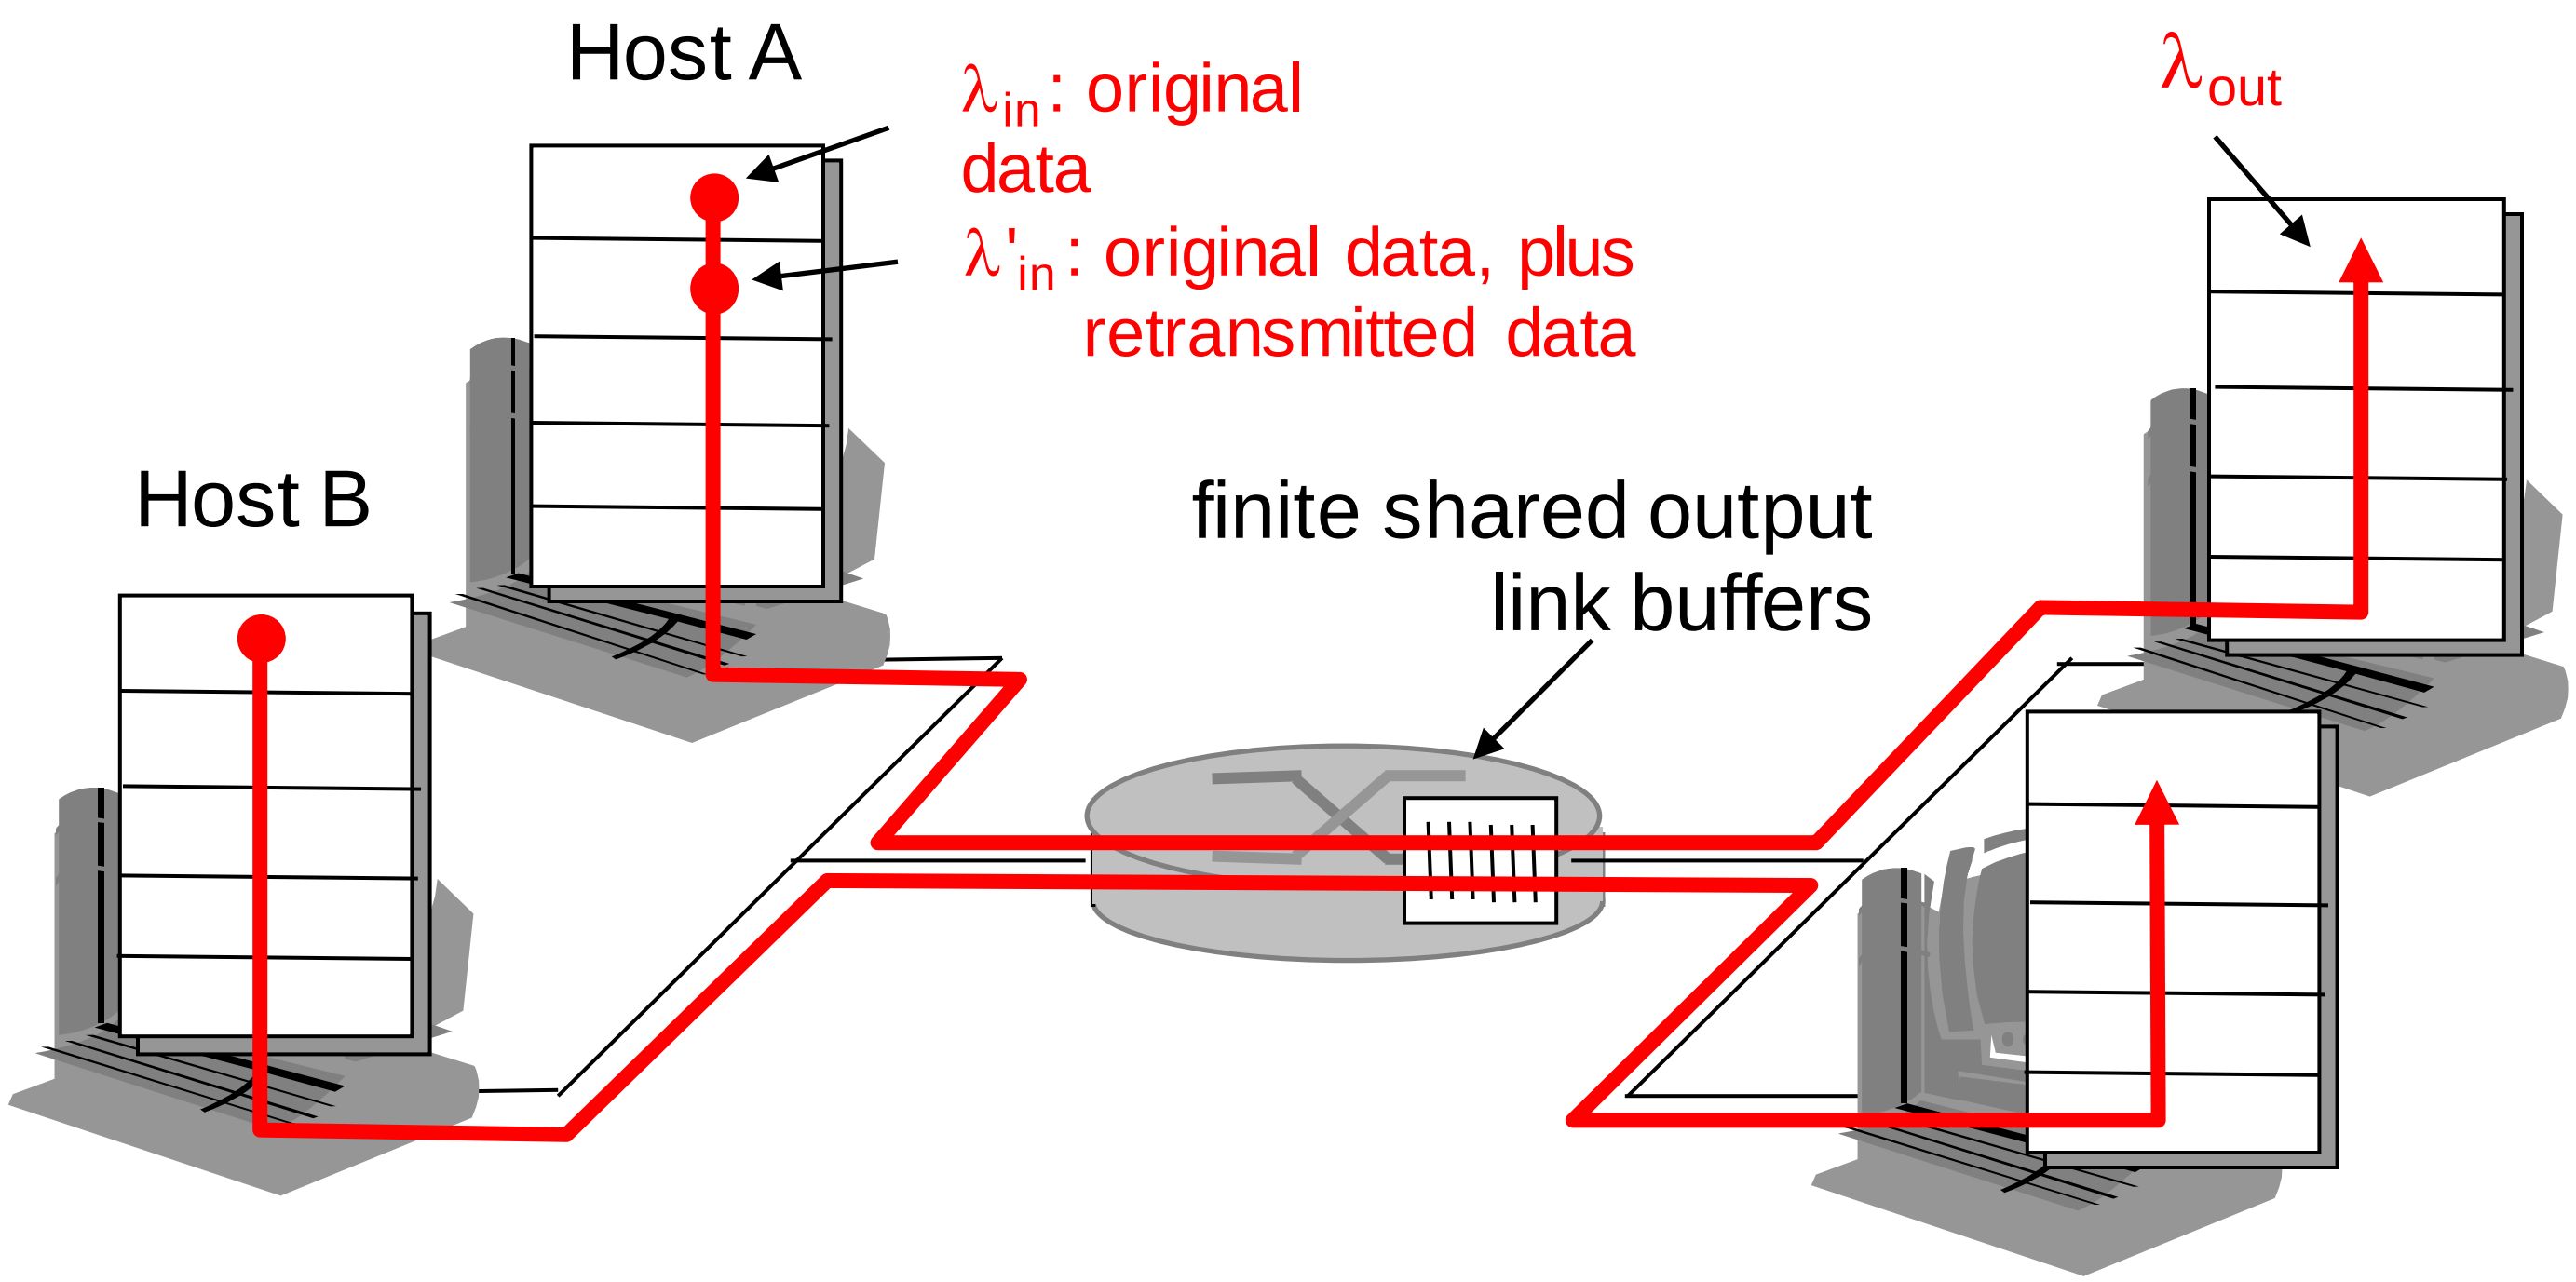

Causes/costs of congestion

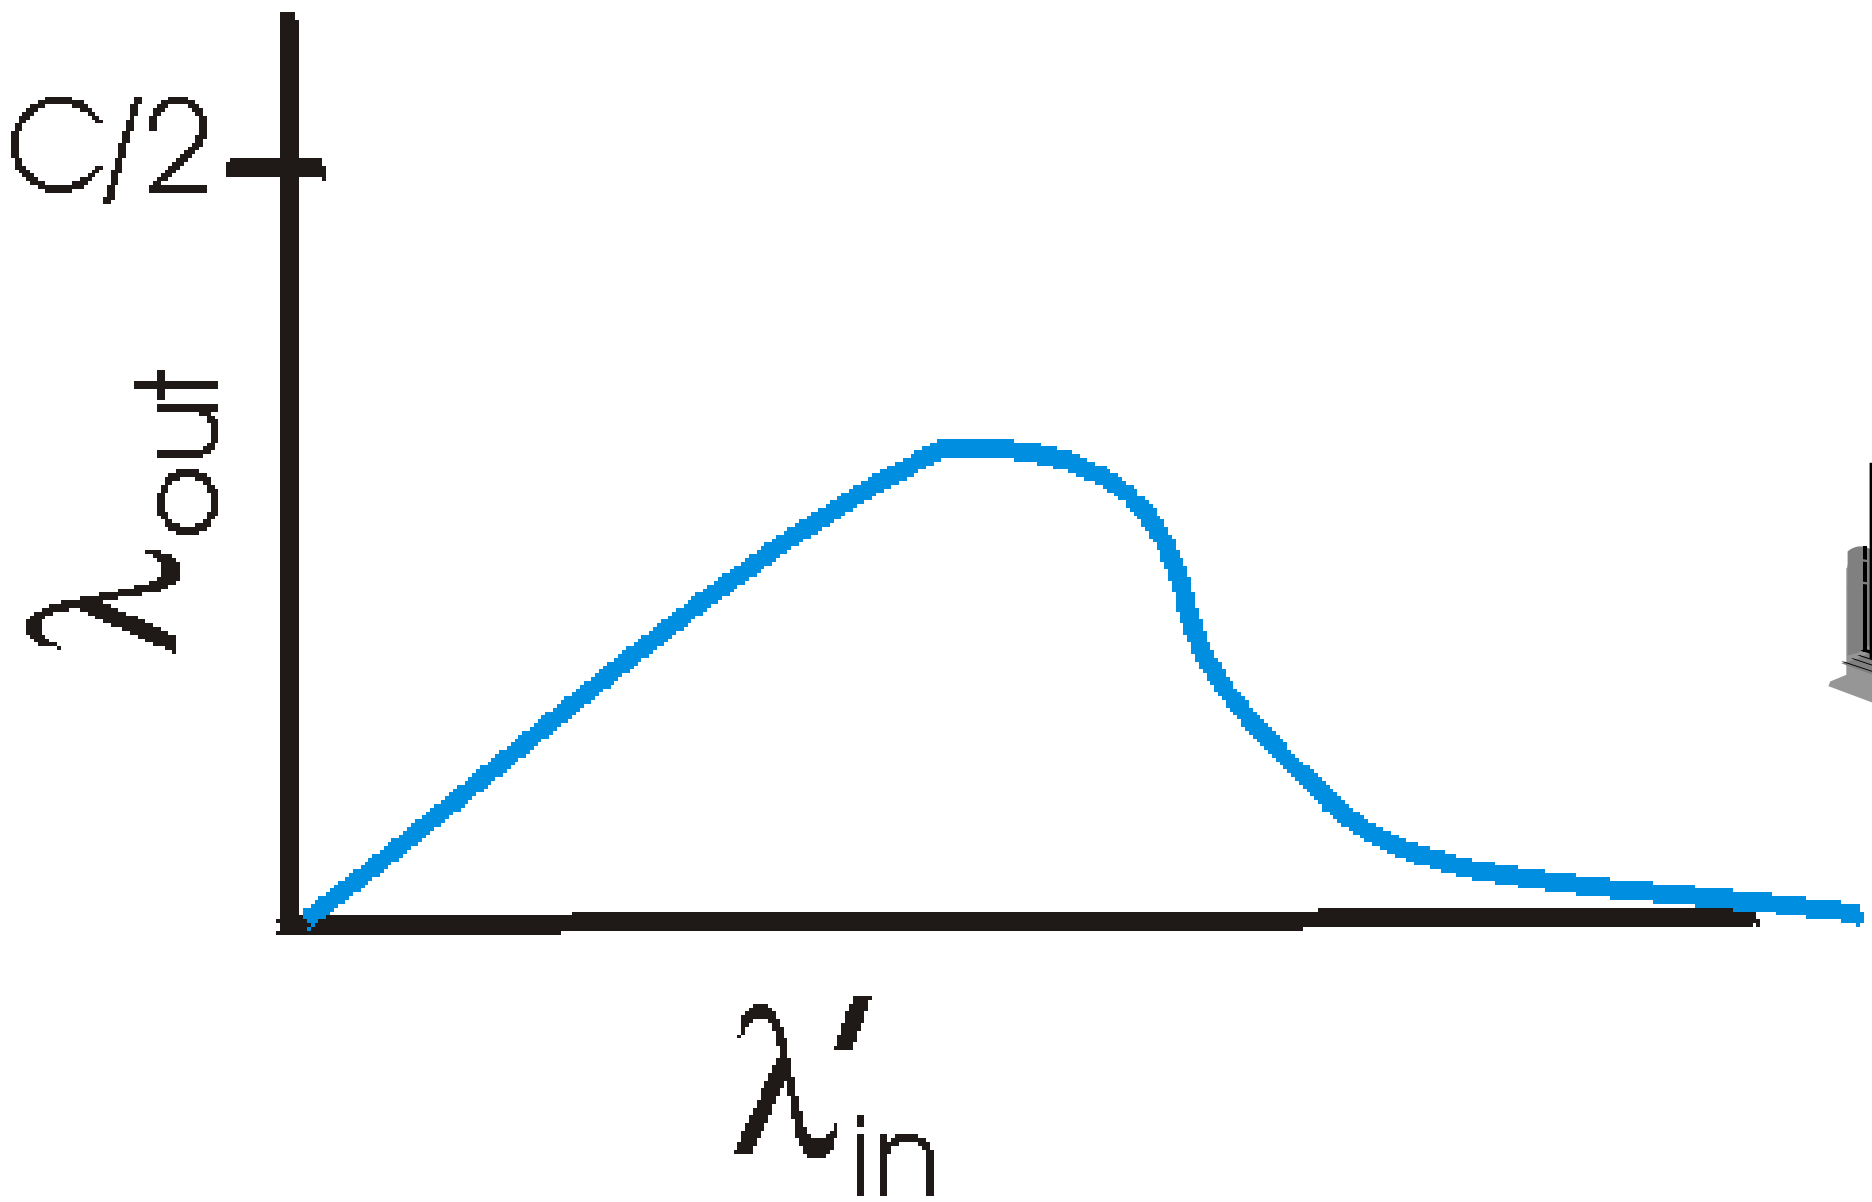

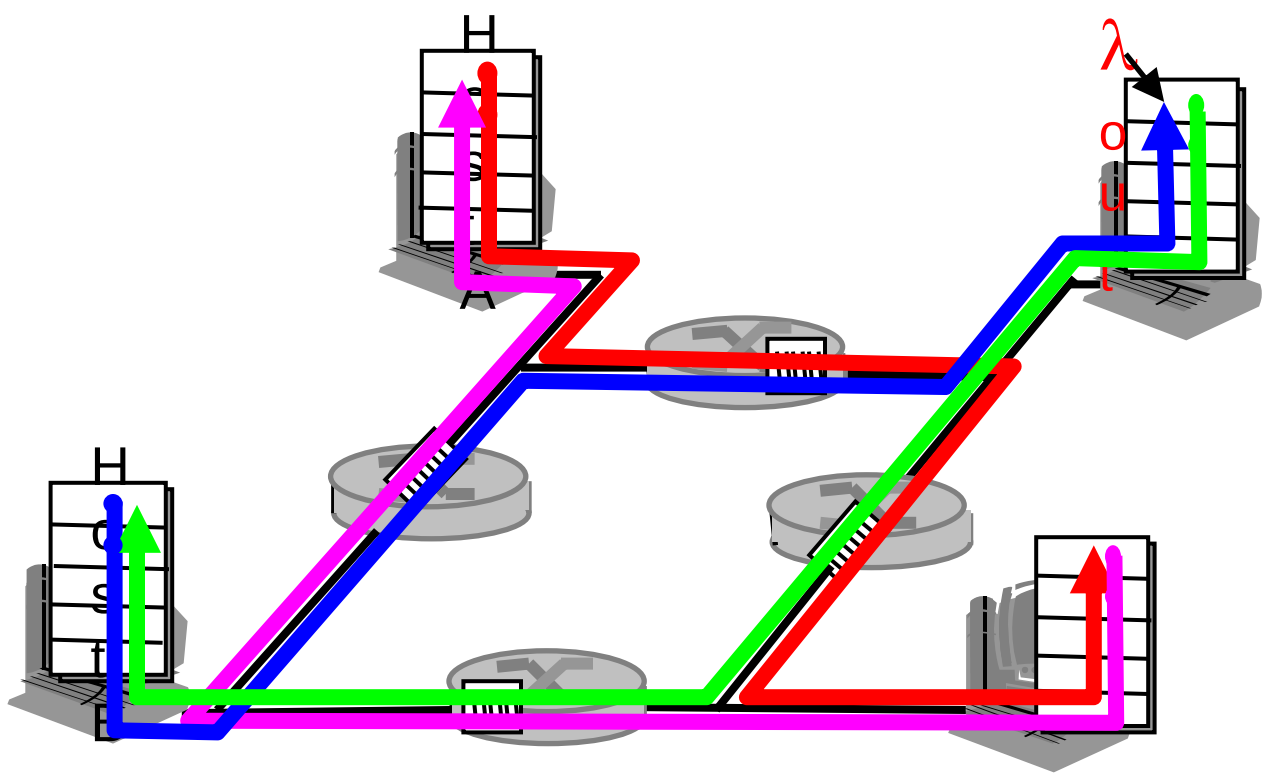

Another "cost" of congestion:

- when packet dropped, any "upstream transmission capacity used for that packet was wasted!

Approaches towards congestion control

Two broad approaches towards congestion control:

End-end congestion control:

- no explicit feedback from network
- congestion inferred from end-system observed loss, delay
- approach taken by TCP

Network-assisted congestion control:

- routers provide feedback to end systems
  - single bit indicating congestion (SNA, DECbit, TCP/IP ECN, ATM)
  - explicit rate sender should send at

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

TCP Congestion Control

- end-end control (no network assistance)
- sender limits transmission:

  `LastByteSent-LastByteAcked`

  $\leq$ `CongWin`

- Roughly,

$$\boxed{\text{rate} = \frac{\text{CongWin}}{\text{RTT}} \text{ Bytes/sec}}$$

- **`CongWin`** is dynamic, function of perceived network congestion

<u>How does sender perceive congestion?</u>

- loss event = timeout *or* 3 duplicate acks
- TCP sender reduces rate (**`CongWin`**) after loss event

<u>three mechanisms:</u>

  - AIMD
  - slow start
  - conservative after timeout events

TCP AIMD

multiplicative decrease: cut `CongWin` in half after loss event

additive increase: increase `CongWin` by 1 MSS every RTT in the absence of loss events: *probing*

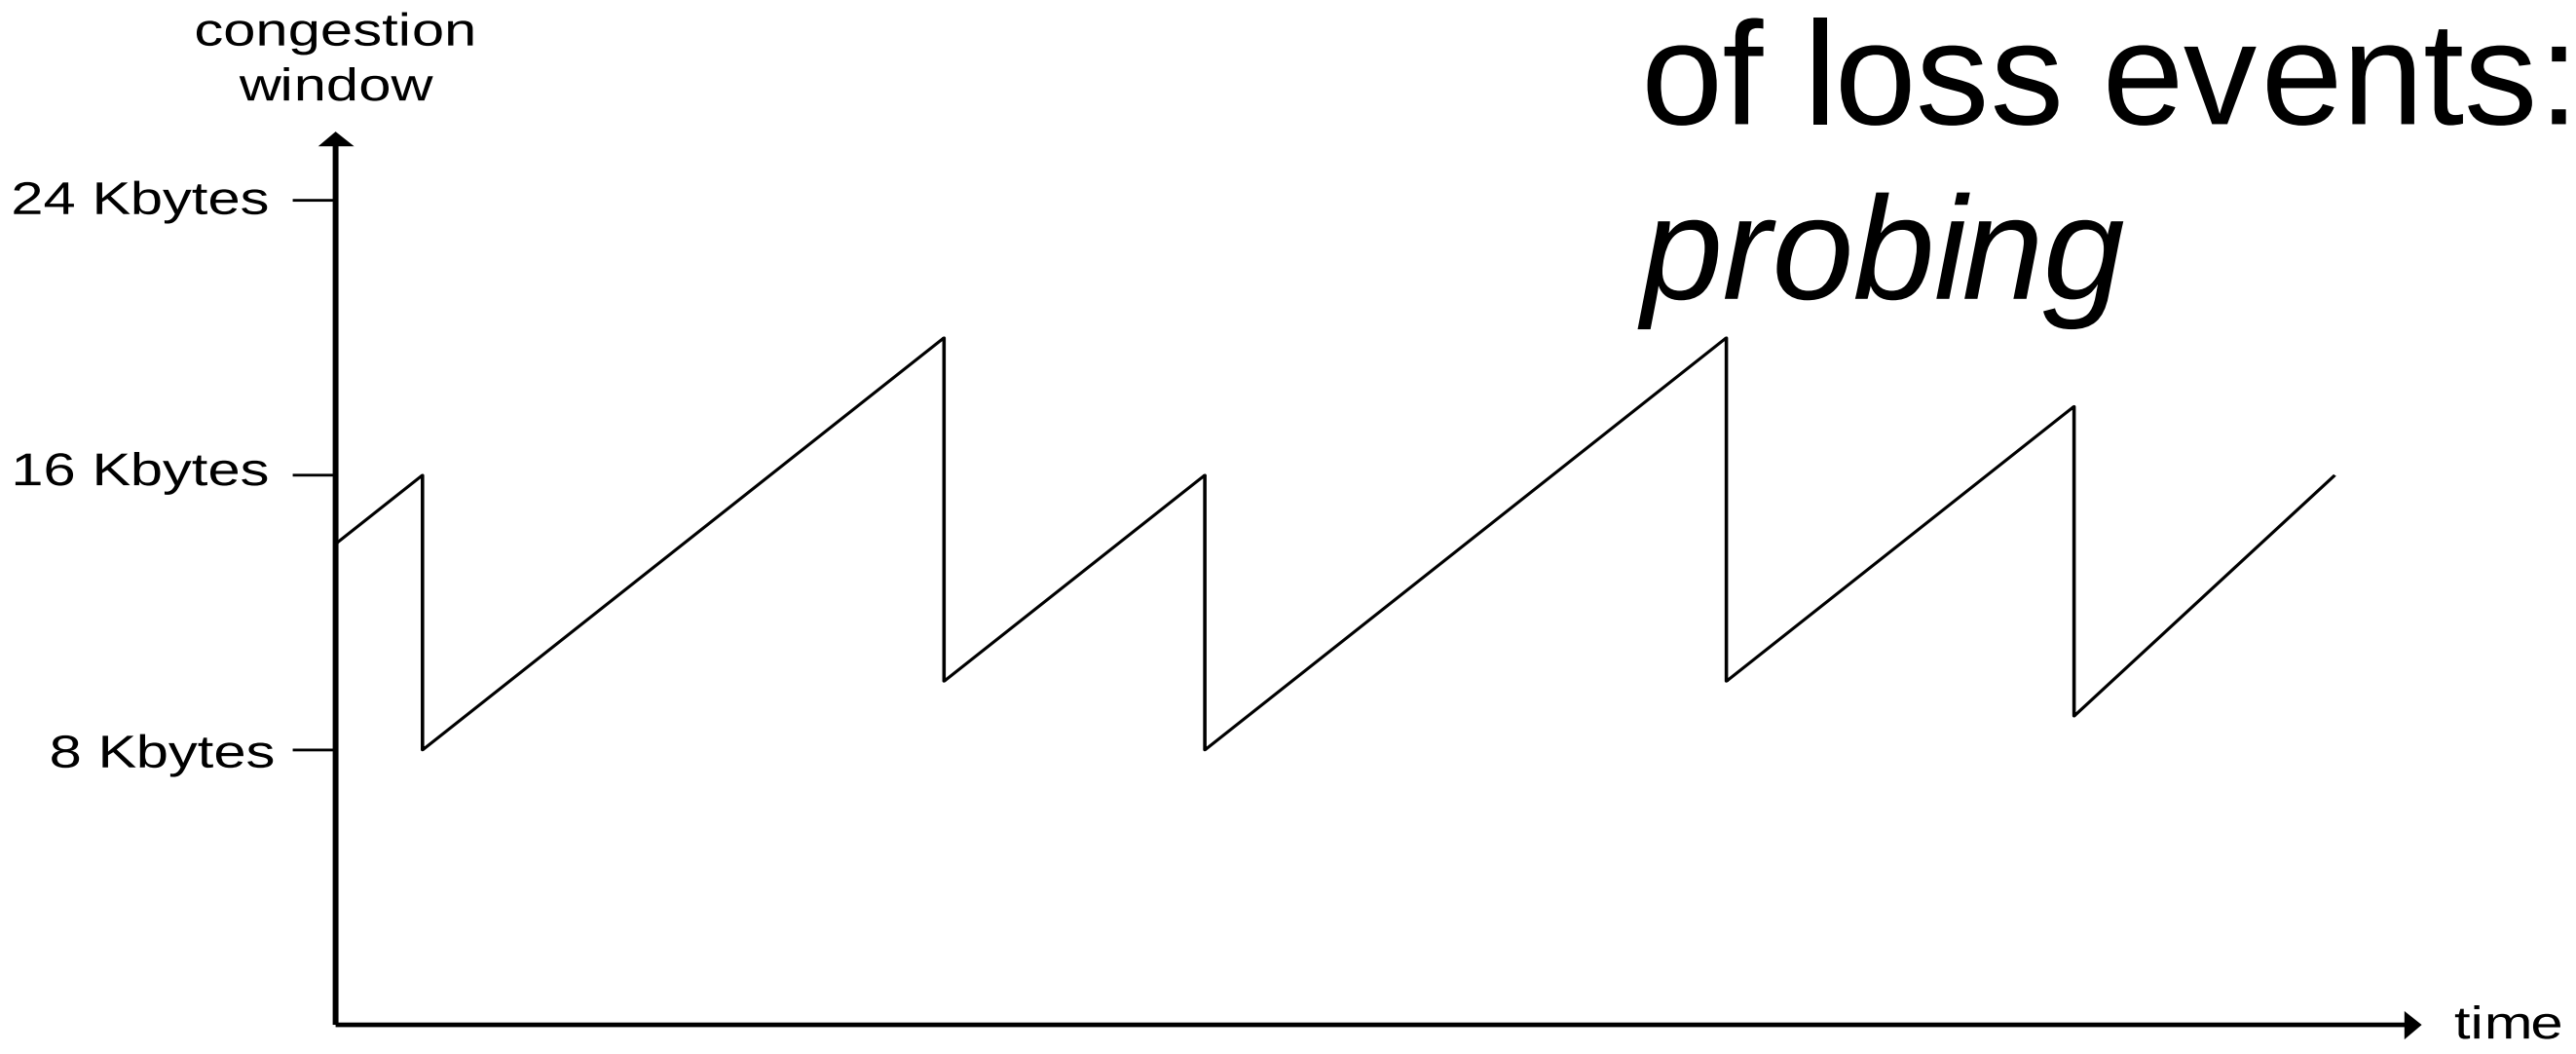

Long-lived TCP connection

TCP Slow Start

- When connection begins, **`CongWin`** = 1 MSS
  - Example: MSS = 500 bytes & RTT = 200 msec
  - initial rate = 20 kbps
- available bandwidth may be >> MSS/RTT
  - desirable to quickly ramp up to respectable rate

- When connection begins, increase rate exponentially fast until first loss event

TCP Slow Start (more)

- When connection begins, increase rate exponentially until first loss event:
  - double **`CongWin`** every RTT
  - done by incrementing **`CongWin`** for every ACK received
- <u>Summary:</u> initial rate is slow but ramps up exponentially fast

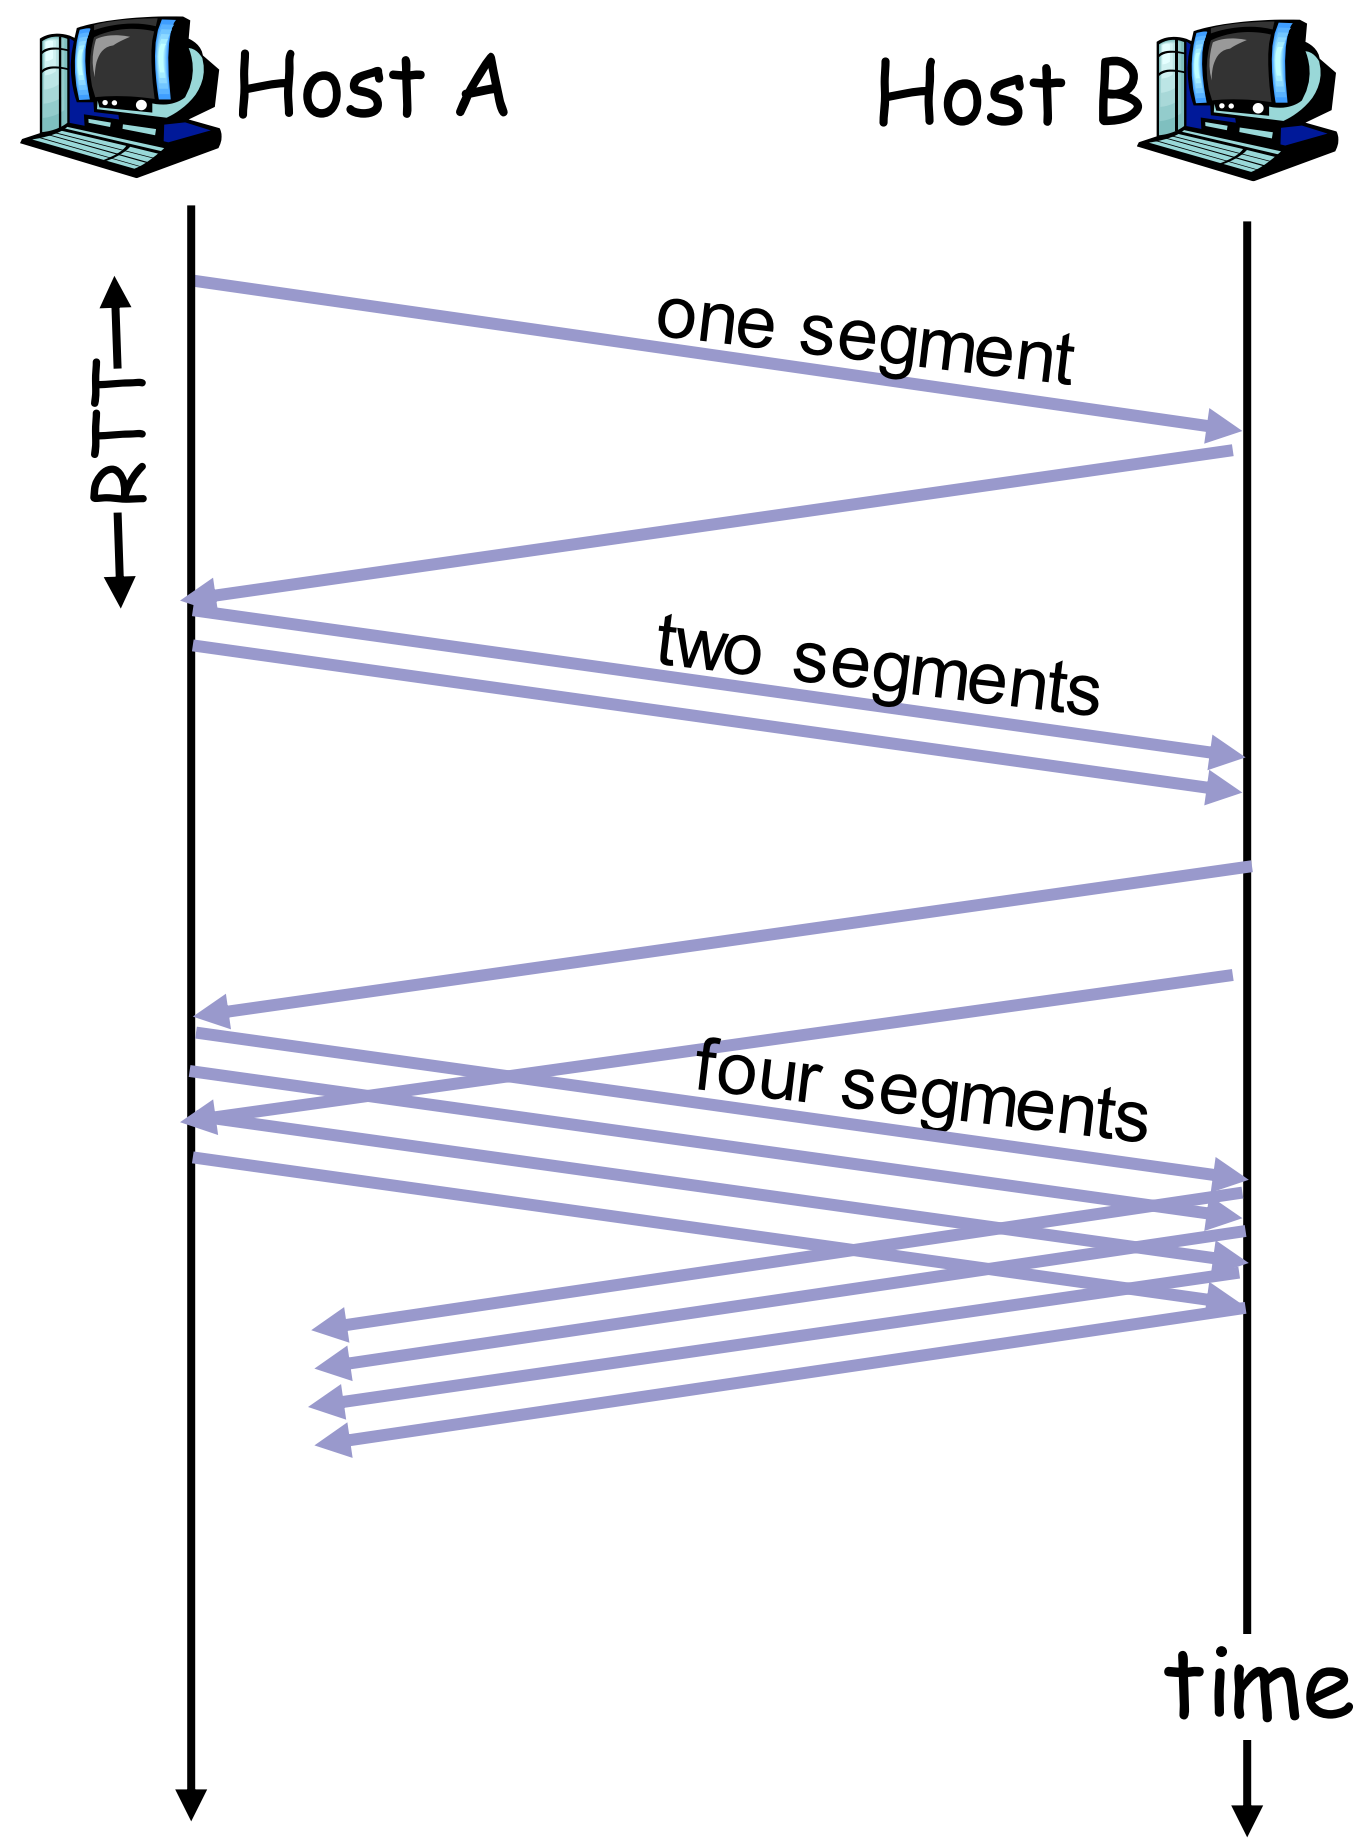

Refinement

- After 3 dup ACKs:
  - `CongWin` is cut in half
  - window then grows linearly
- <u>But</u> after timeout event:
  - `CongWin` instead set to 1 MSS;
  - window then grows exponentially
  - to a threshold, then grows linearly

Philosophy:

- 3 dup ACKs indicates network capable of delivering some segments
- timeout before 3 dup ACKs is "more alarming"

Refinement (more)

Q: When should the exponential increase switch to linear?

A: When **`CongWin`** gets to 1/2 of its value before timeout.

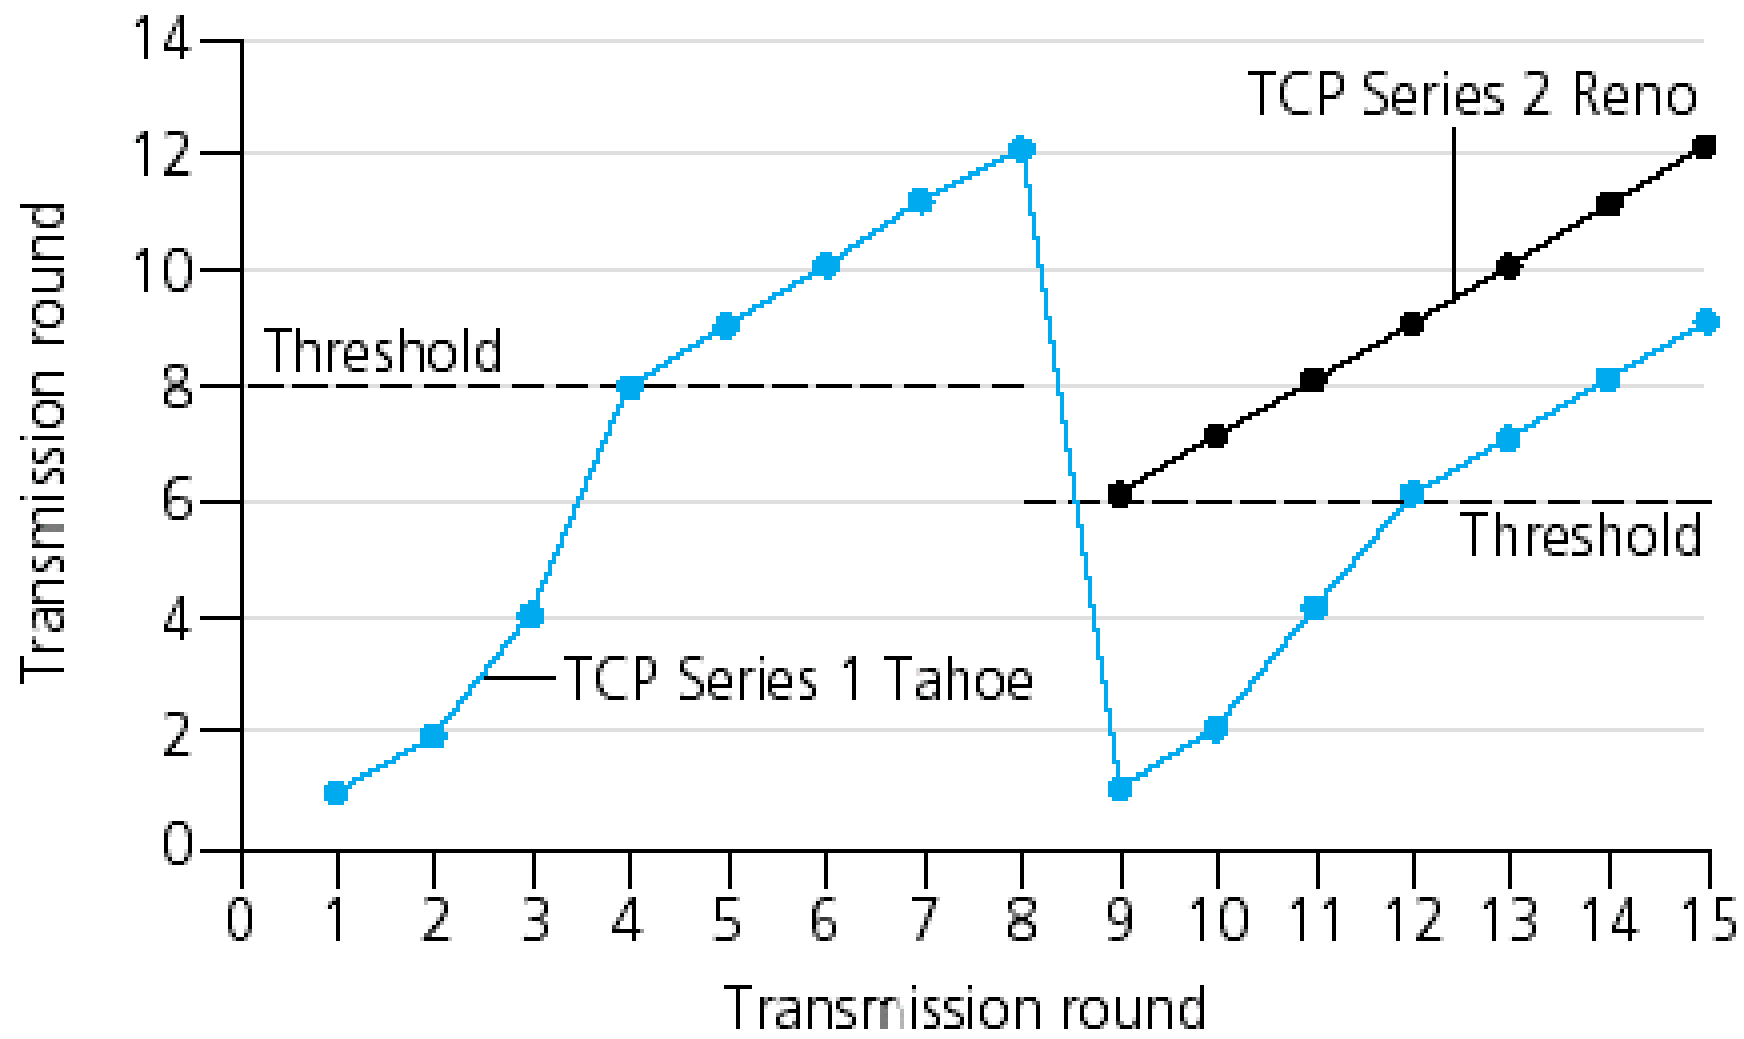

Implementation:

- Variable Threshold
- At loss event, Threshold is set to 1/2 of CongWin just before loss event

Summary: TCP Congestion Control

- When **`CongWin`** is below **`Threshold`**, sender in slow-start phase, window grows exponentially.
- When **`CongWin`** is above **`Threshold`**, sender is in congestion-avoidance phase, window grows linearly.
- When a triple duplicate ACK occurs, **`Threshold`** set to **`CongWin/2`** and **`CongWin`** set to **`Threshold`**.
- When timeout occurs, **`Threshold`** set to **`CongWin/2`** and **`CongWin`** is set to 1 MSS.

TCP Fairness

- Fairness goal: if K TCP sessions share same bottleneck link of bandwidth R, each should have average rate of R/K
- Practically this does not happen in TCP as connections with lower RTT are able to grab the available link bandwidth more quickly.

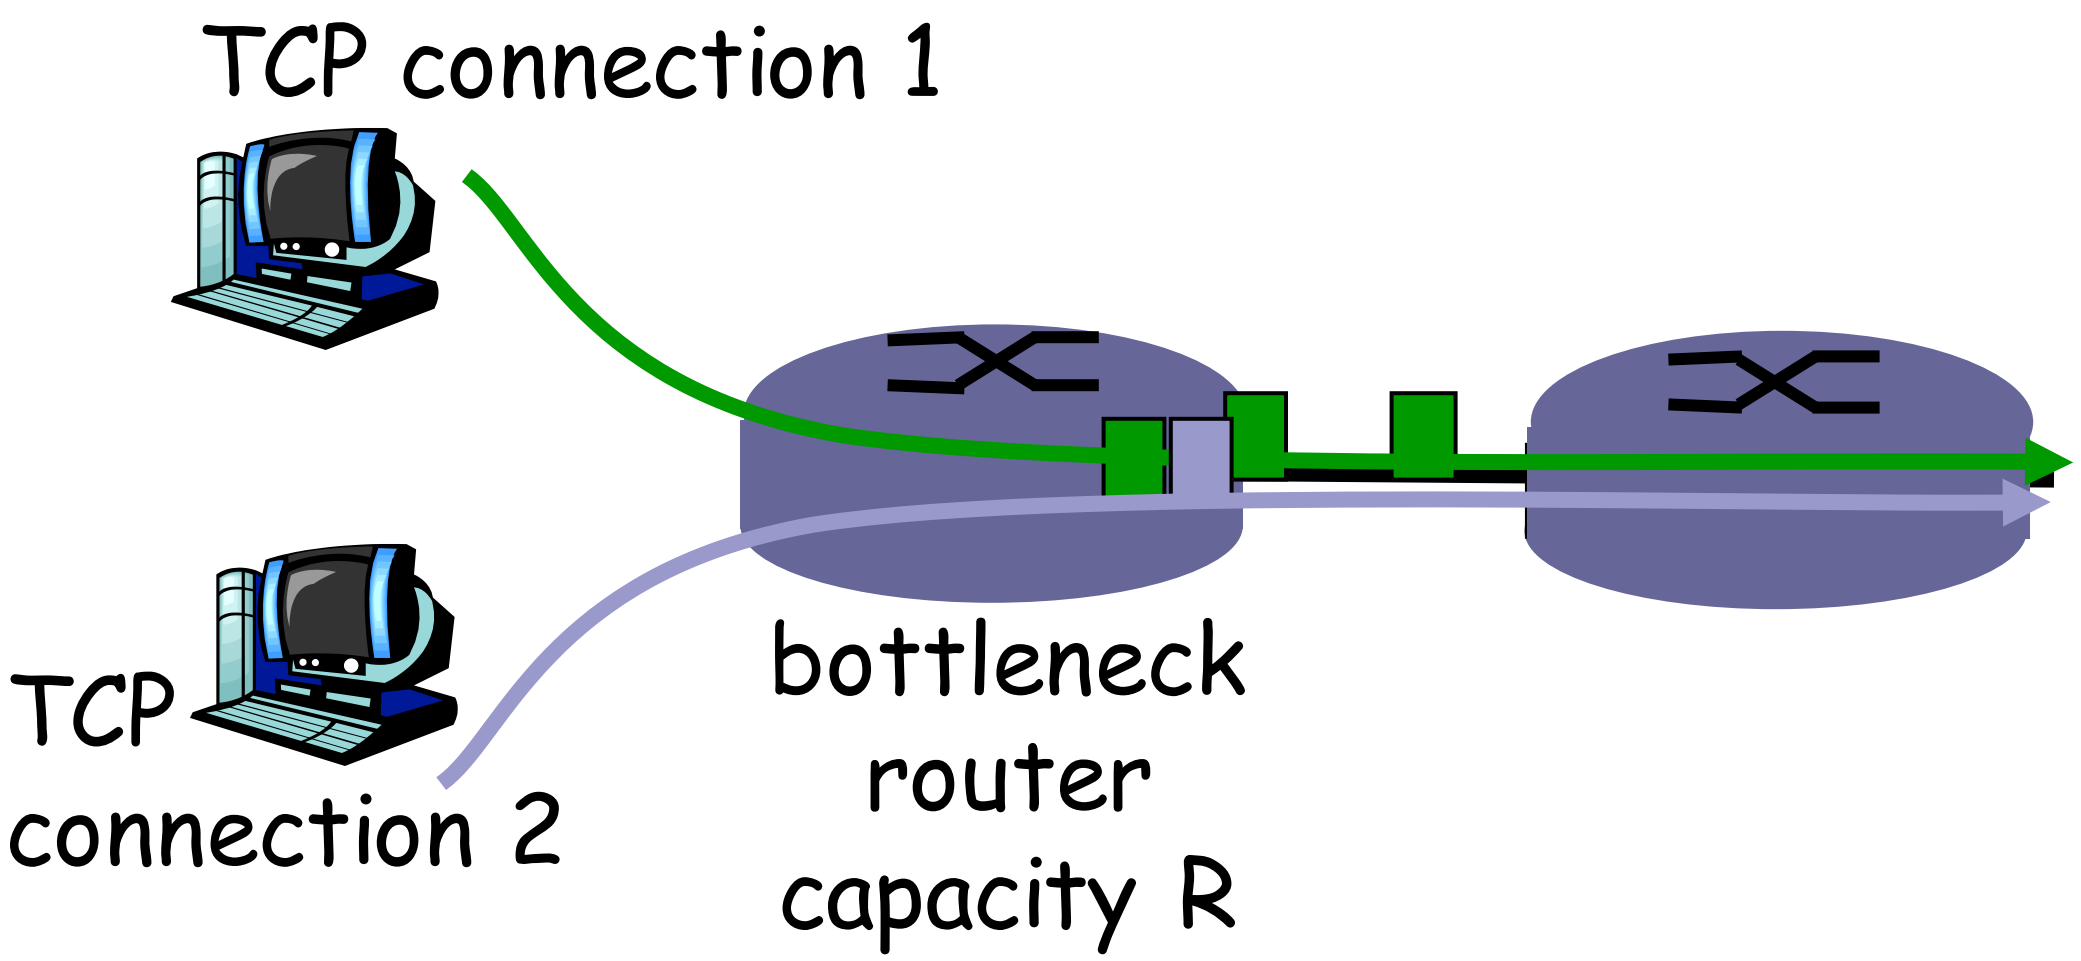

Fairness (more)

Fairness and UDP

- Multimedia apps often do not use TCP
  - do not want rate throttled by congestion control
- Instead use UDP:
  - pump audio/video at constant rate, tolerate packet loss
- Research area: TCP friendly

Fairness and parallel TCP connections

- nothing prevents app from opening parallel cnctions between 2 hosts.
- Web browsers do this
- Example: link of rate R supporting 9 cnctions;
  - new app asks for 1 TCP, gets rate R/10
  - new app asks for 11 TCPs, gets R/2 !

TCP Options: Protection Against Wrap Around Sequence

- 32-bit **`SequenceNum`**

Bandwidth	Time Until Wrap Around
T1 (1.5 Mbps)	6.4 hours
Ethernet (10 Mbps)	57 minutes
T3 (45 Mbps)	13 minutes
FDDI (100 Mbps)	6 minutes
STS-3 (155 Mbps)	4 minutes
STS-12 (622 Mbps)	55 seconds
STS-24 (1.2 Gbps)	28 seconds

TCP Options: Keeping the Pipe Full

- 16-bit **`AdvertisedWindow`**

Bandwidth	Delay x Bandwidth Product
T1 (1.5 Mbps)	18KB
Ethernet (10 Mbps)	122KB
T3 (45 Mbps)	549KB
FDDI (100 Mbps)	1.2MB
STS-3 (155 Mbps)	1.8MB
STS-12 (622 Mbps)	7.4MB
STS-24 (1.2 Gbps)	14.8MB

assuming 100ms RTT

TCP Extensions

- Implemented as header options
- Store timestamp in outgoing segments
- Extend sequence space with 32-bit timestamp (PAWS)
- Shift (scale) advertised window