
Topology

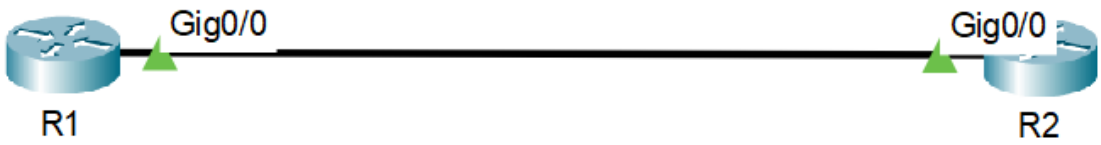

Configure IPv4 and IPv6 between two routers.

IPv4 Subnet	**IPv6 Subnet**
192.168.168.192/28	2001:db8:12::60/125

Task 1:

- Configure R1 with the first usable host IP address in the IPv4 network.
- Configure R2 with the last usable host IP address in the IPv4 network.
- Verify connectivity using ping.

Task 2:

- Do not assign the subnet router anycast address to either router.
- Configure R1 with the first usable host IP address in the IPv6 network.
- Configure R2 with the last usable host IP address in the IPv6 network.
- Verify connectivity using ping.