
Topology

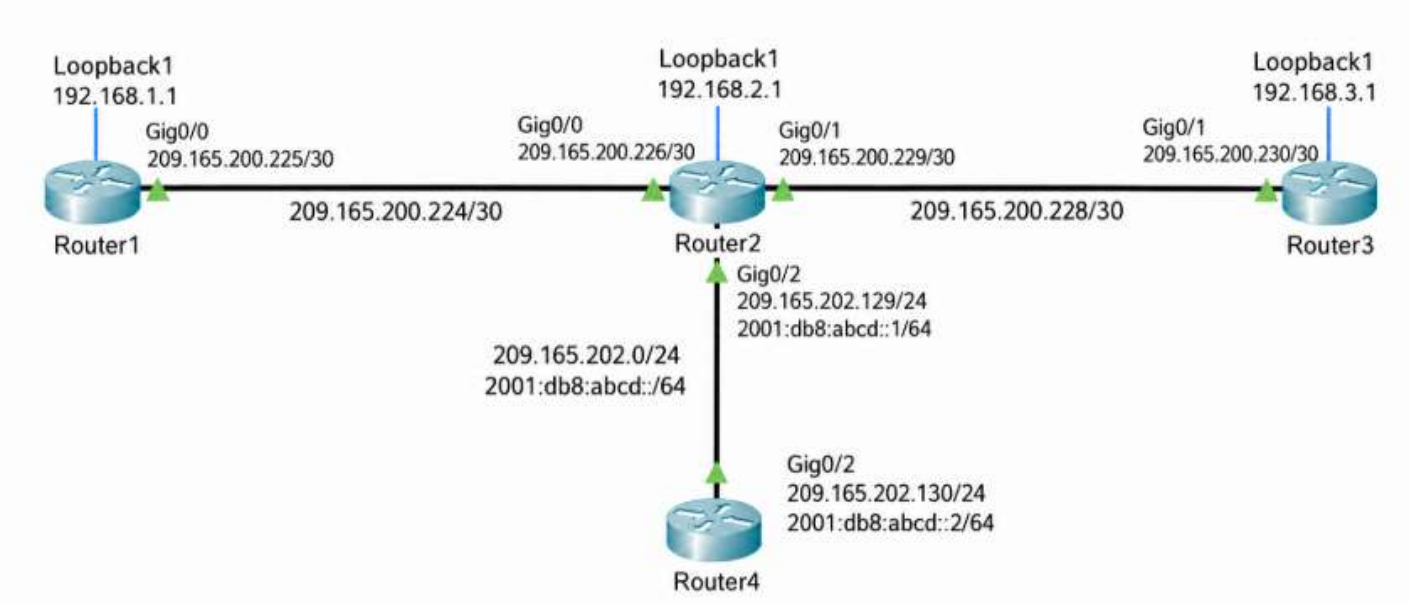

Tasks

1. Configure the IPv4 and IPv6 interface addresses on R1, R2, R3, and R4 according to the topology diagram. Configure Loopback1 on R1, R2, and R3 using a /32 subnet mask. Enable all connected physical interfaces and verify connectivity between directly connected routers.

2. Configure static routing using host routes to establish connectivity from R3 to R1's Loopback1 address, using the source IP address 209.165.200.230. Configure the necessary return route and verify connectivity using ping.

3. Configure an IPv4 default route on R2 using R4 as the next hop.

4. Configure an IPv6 default route on R2 using R4 as the next hop.