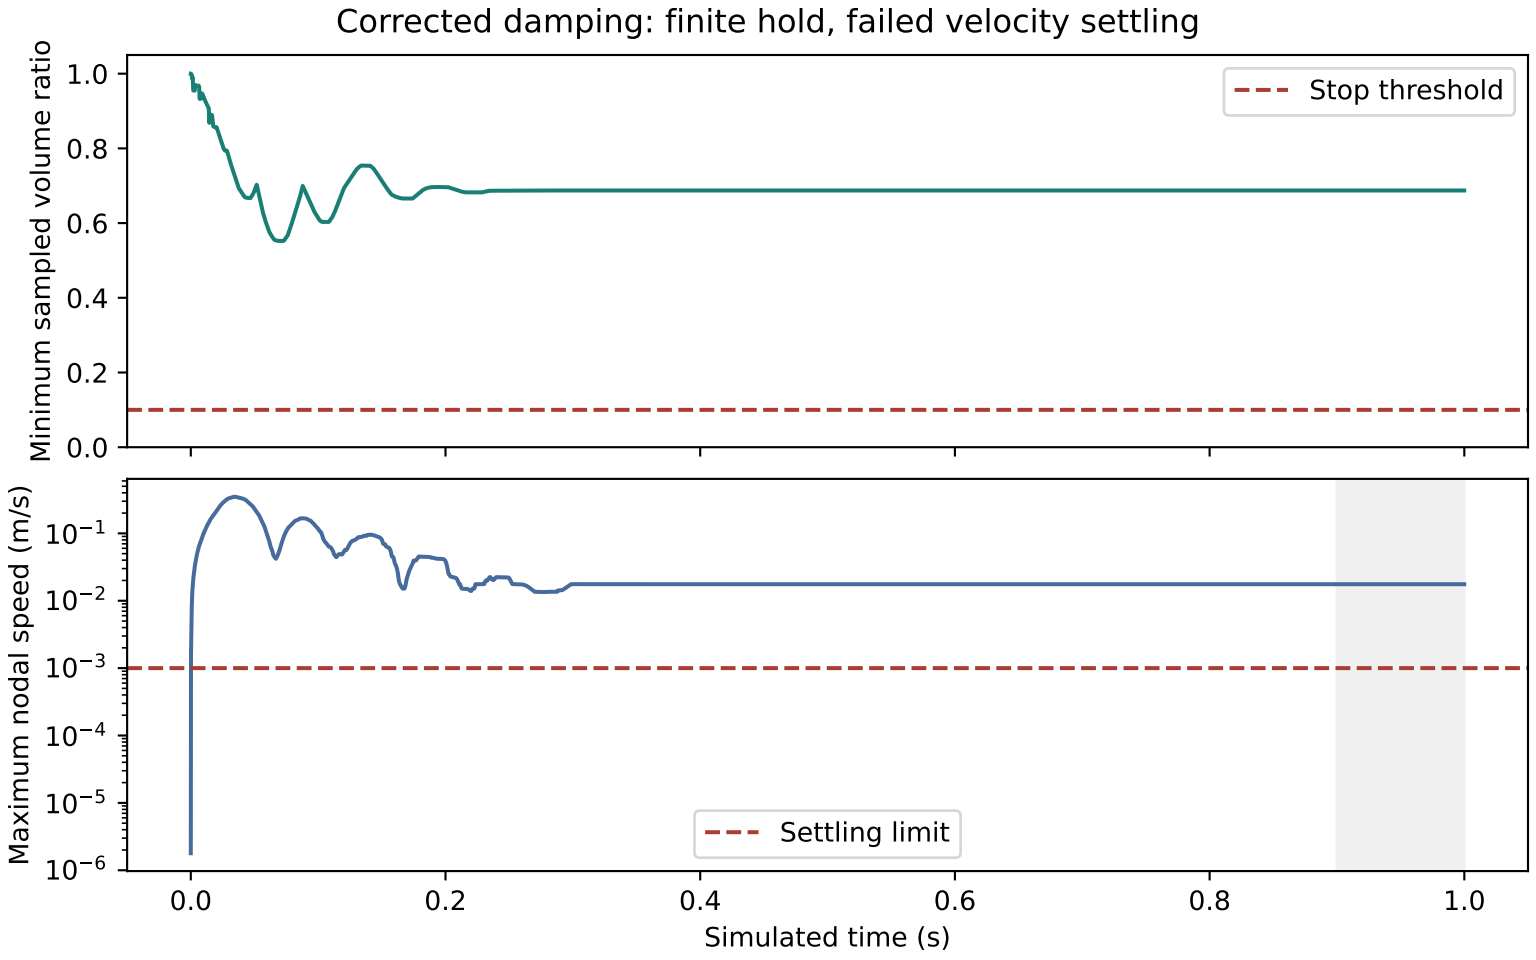
Corrected damping: finite hold, failed velocity settling
Minimum sampled volume ratio
1.0
0.8
0.6
0.4
0.2
0.0
Stop threshold
Maximum nodal speed (m/s)
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
Settling limit
0.0
0.2
0.4
0.6
0.8
1.0
Simulated time (s)