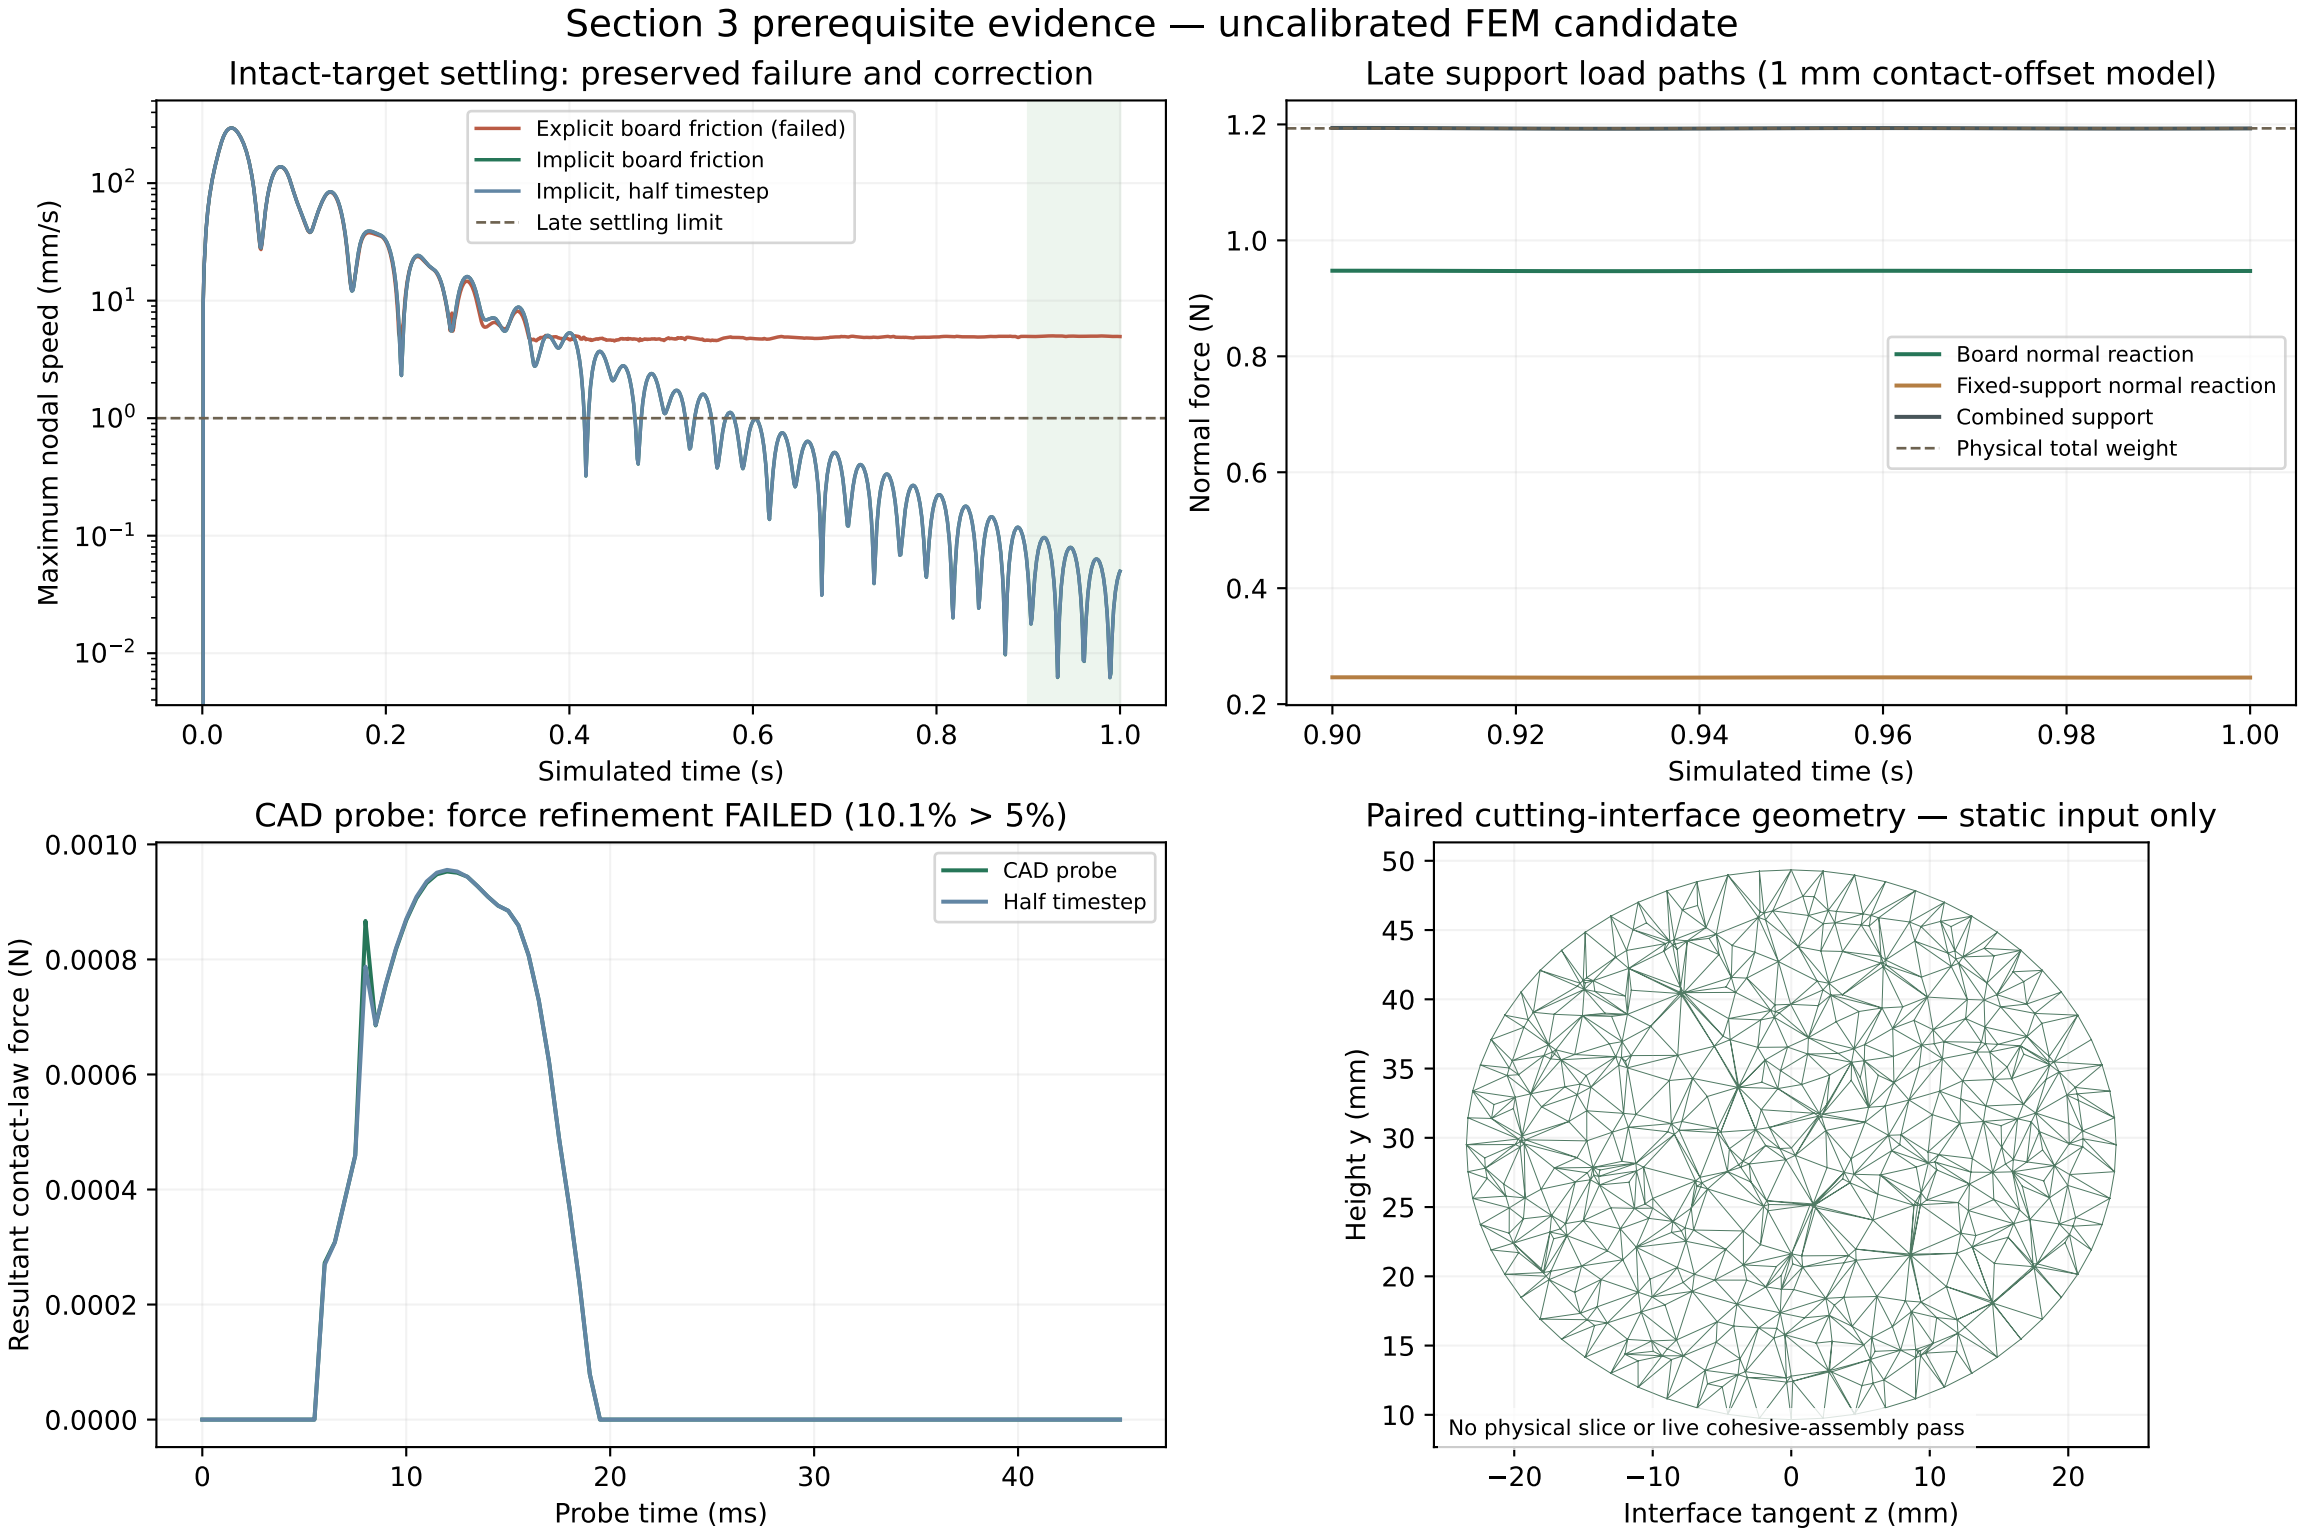
Section 3 prerequisite evidence — uncalibrated FEM candidate
Intact-target settling: preserved failure and correction
Explicit board friction (failed)
Implicit board friction
Implicit, half timestep
Late settling limit
Maximum nodal speed (mm/s)
Simulated time (s)
Late support load paths (1 mm contact-offset model)
Board normal reaction
Fixed-support normal reaction
Combined support
Physical total weight
Normal force (N)
Simulated time (s)
CAD probe: force refinement FAILED (10.1% > 5%)
CAD probe
Half timestep
Resultant contact-law force (N)
Probe time (ms)
Paired cutting-interface geometry — static input only
No physical slice or live cohesive-assembly pass
Height y (mm)
Interface tangent z (mm)