



SeCTA

## ELEMENT POLE EB723122

### 1. Steel

#### Quality

Shaft Of Pole : Steel grade Fe 510c or Equiv.

Base Plate, Bracket : Steel Grade St 37.2

#### Machining

Holes required for fixing to poles are drilled. Also the fixing part to the luminaires, depending of model, All fasteners are stainless Steel AISI 304.

#### Finishing

After machining, welding, Grinding, sanding and making sure that all the impurities are removed, two-component primer is applied for adherence increase.

1- Hot Dipped Galvanized According to ASTM A123 or BS EN ISO 1461 or Equiv.

2- final polyurethane layer is applied for the colour, 60 micron thick., usually Matt black. For other colours, please indicate RAL number

### 2. Extruded Aluminum

#### Quality

Shaft & Bracket made from extruded aluminum , Alloy 6063 and tempering treatment is T6.

Base Plate and decorative Parts, Eutectic alloy with excellent casting properties, excellent fluidity and high resistance to hot tearing. Good machinability, excellent weldability, and high chemical resistance, EN-AC-44100 Casting, According to EN 1706 and Casting of 7.8kg/mm<sup>2</sup>

#### Machining

Holes required for fixing to poles are drilled. Also the fixing part to the luminaires, depending of model, All fasteners are stainless Steel AISI 304.

#### Finishing

After machining, welding, Grinding, sanding and making sure that all the impurities are removed, polyurethane layer is applied for the colour, 60 micron thick., usually Matt black. For other colours, please indicate RAL number



#### Fuse Box

PMMA or Aluminum





SeCTA

## Light Characteristics EB723122

### Technical Notes:

- HeatSink Aluminum Module.
- high-efficiency High Power LEDs, serial connected.
- degree of protection : IP68 IK08
- ESD protection class II


PowerAvailable : 10W,20W,30W,50W  
CCT: 3000K-4000K-5000K -6000K  
Efficacy: LUMILED 3030 LEDChip 127 lm/w  
CREE COB LEDChip 140lm/w

Operating Life: 50,000hrs


### ALUMINUM LED MODULE




Ultrawhite glass



Die casting heatsink

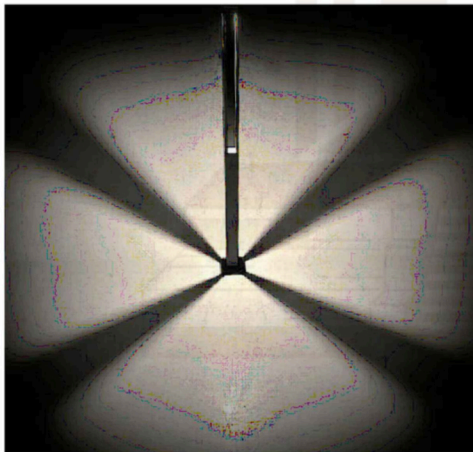

### Typical Light Distribution Curve:

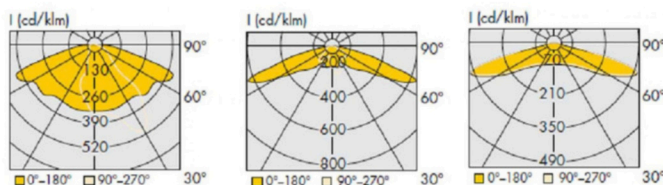



شركة الخطوط المعدنية


للمقاولات العامة

Metal Lines Co.

س.ت. 4031308794 C.R.

SeCTA

## Drawing EB723122

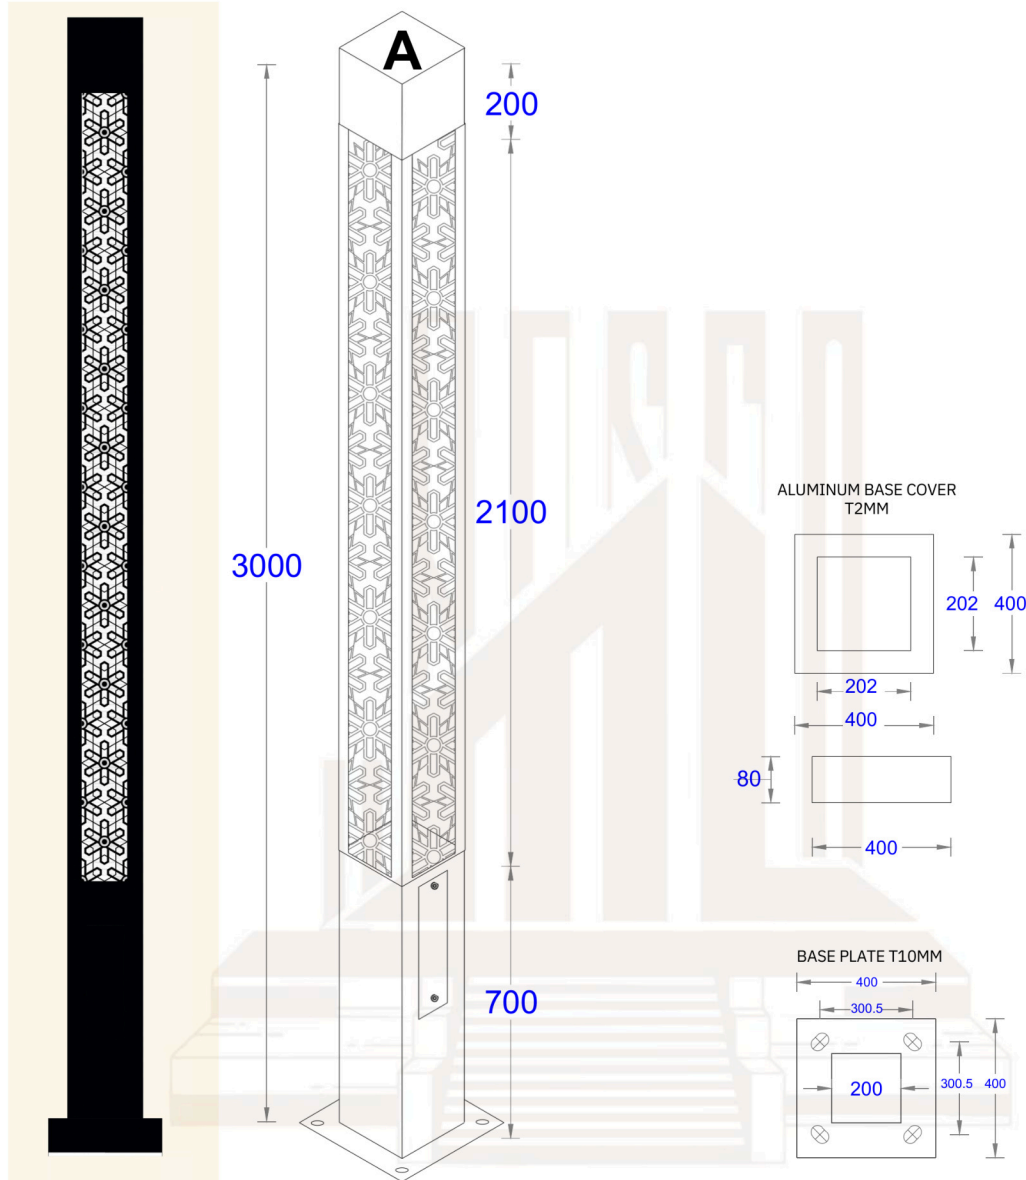

Body Made From:

☐ Steel

☒ Aluminum

Finish Surface:

Acrylic Diffuser:

☐ Without

☒ 3MM ACRYLIC LEXAN

POWDER COATING RAL9017

Square Size:

☐ 200X200

☒ 250X250

☐ 220X220

High Availability:

☐ 3M

☒ 5M

☐ 4M

☐ 4.5M

☐ 5M

☐ 5.5M

Wattage:

☐ 10W

☐ 30W

☒ 50W

☒ 3000K

☐ 4000K

☐ 5000K

H1 & H2 & H3:

AS PER REQUEST

\*ALL DIMENSIONS ARE IN MILLIMETERS




شركة الخطوط المعدنية

للمقاولات العامة

**Metal Lines Co.**

س.ت. 4031308794 C.R.

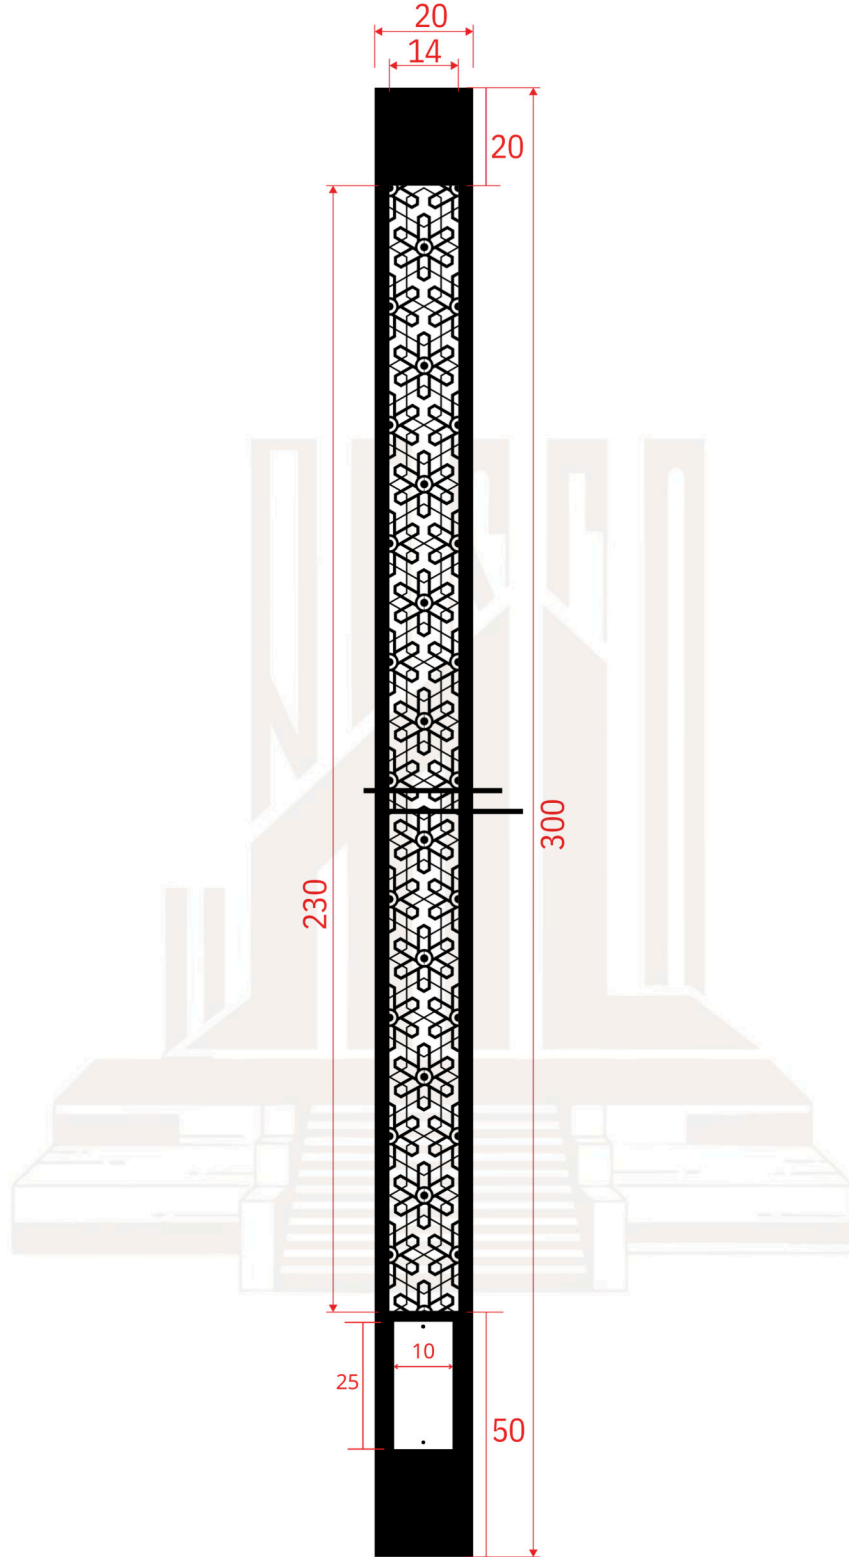



## PHILIPS UNILinear Flex LED Strip Light

**Model:** BGC401 400LM 10W 3000K L5 0612 S G

The Philips UNILinear Flex BGC401 is a professional-grade, highly durable waterproof and dustproof LED strip light. Designed specifically for outdoor architectural decoration, cove lighting, and path guidance, it utilizes advanced anti-UV polyurethane irrigation sealing glue technology to preserve pristine color consistency and safeguard components in heavy weather environments.

### Technical & Performance Specifications

| Parameter                    | Specification Value                                          |
|------------------------------|--------------------------------------------------------------|
| Color Temperature (CCT)      | 3000 K (Warm White, 930)                                     |
| Luminous Flux                | 2,000 lm per 5-Meter Reel                                    |
| Power Consumption            | 43 W total (approx. 10W/m matrix)                            |
| Input Voltage                | 24 V DC (Constant Voltage)                                   |
| Color Rendering Index (CRI)  | ≥80 (High fidelity color rendering)                          |
| Ingress Protection (IP Code) | IP66 (Dust-tight, protected against powerful water jets)     |
| Mechanical Impact Protection | IK04 (0.5 J standard protection)                             |
| Dimensions                   | 6 mm Height × 12 mm Width × 5000 mm Length                   |
| Housing & Cover Material     | UV-resistant Silicon Rubber & Stainless Steel fixations      |
| Operating Temperature Range  | -40 °C to +45 °C                                             |
| Dimmability                  | Non-Dimmable (Constant Light Output configuration)           |
| Cut Ability                  | Not cuttable (to preserve strict IP waterproofing integrity) |
| Lifespan                     | 30,000 Hours (L70B50 @ 35 °C)                                |
| Connection Mode              | Flying leads connection with 0.6 meter integrated cable      |

### Key Benefits & Application Guidelines

- **Advanced Weather Shielding:** Sealed with anti-UV polyurethane without color-shifting or premature aging under heavy solar exposure.
- **Color Uniformity:** Tight binning checks (SDCM ≤5) ensure seamless light distribution along continuous lines without visible dark spots.
- **Safe Installation:** Class III IEC safety class rating utilizes 24V low voltage loops. *Warning: Do not cut this product; altering length breaches irrigation seals and forfeits warranty coverage.*