

In questa foto sono i 6 host conessi a i 2 switch 3 ciascuno switch

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6


Pinging 192.168.1.6 with 32 bytes of data:

Reply from 192.168.1.6: bytes=32 time<lms TTL=128
Reply from 192.168.1.6: bytes=32 time=5ms TTL=128
Reply from 192.168.1.6: bytes=32 time<lms TTL=128
Reply from 192.168.1.6: bytes=32 time<lms TTL=128
Reply from 192.168.1.6: bytes=32 time<lms TTL=128

Ping statistics for 192.168.1.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 1ms

C:\>
```

Questa foto dimostra il ping tra il computer 1 e il computer 5

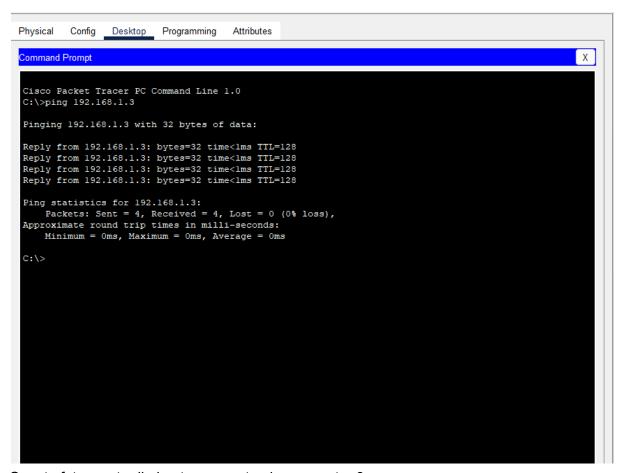

Questa foto mostra il ping tra computer 1 e computer 3