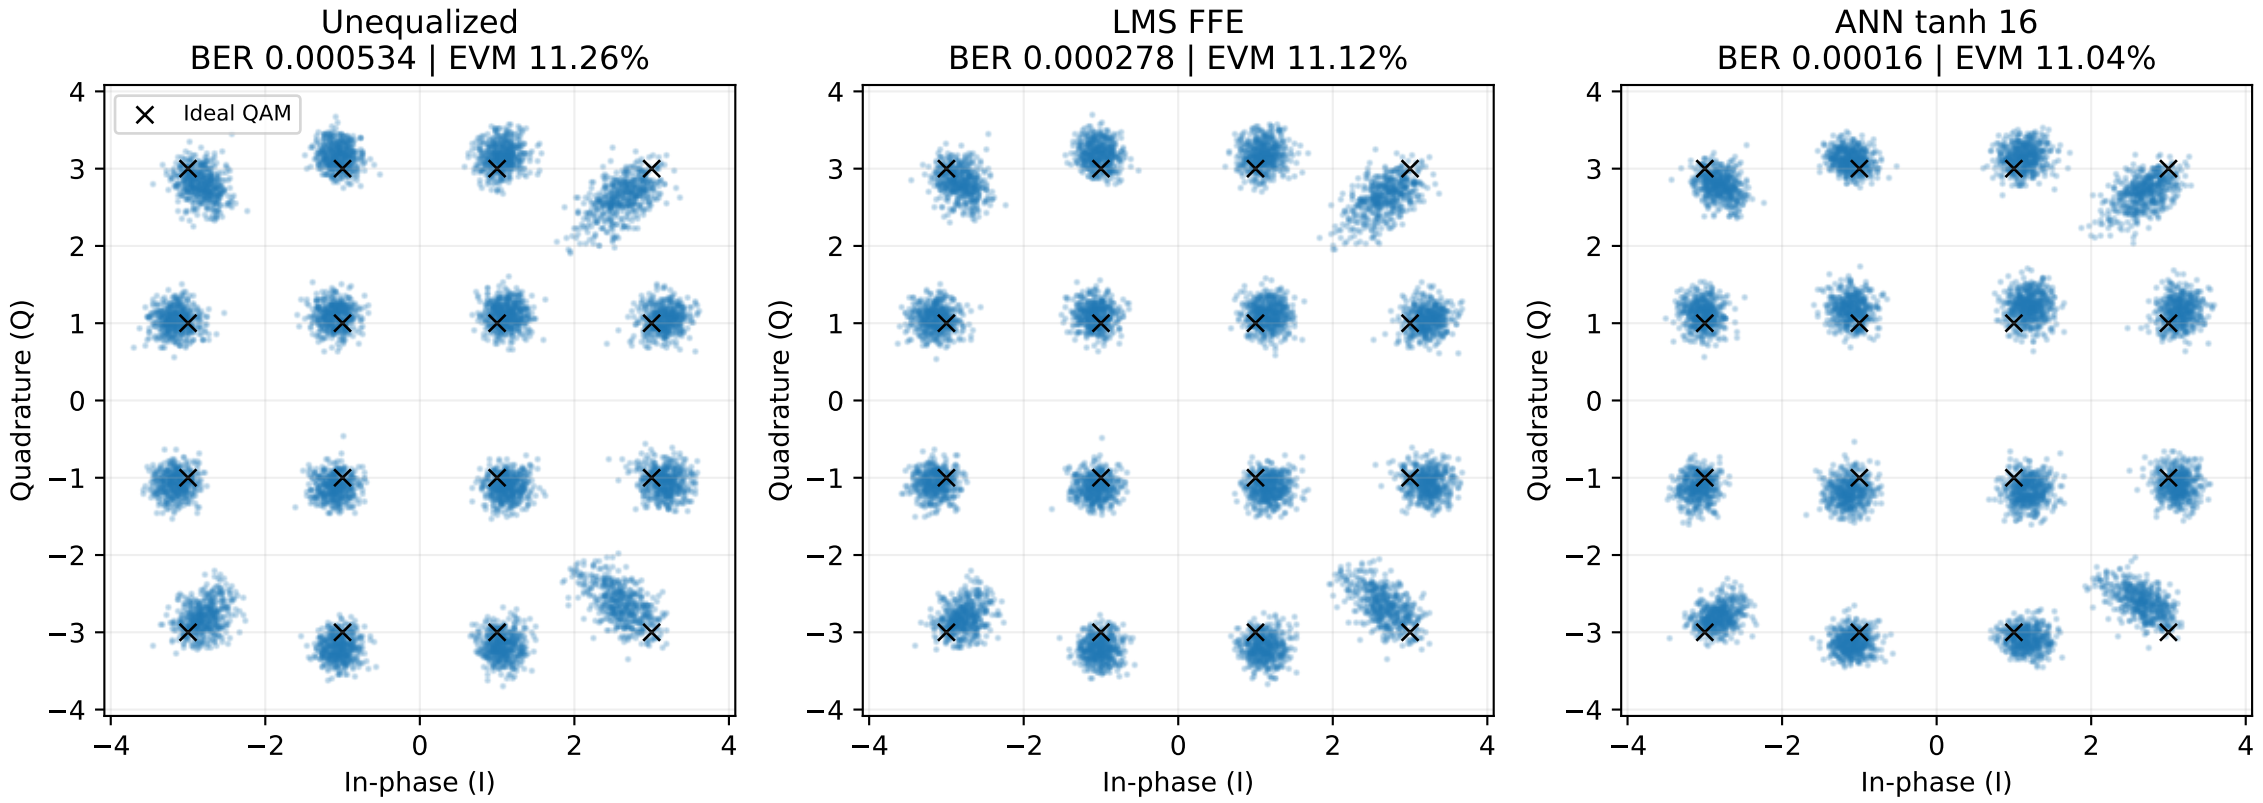

reference | ROP -17.5 dBm | 16-QAM
Unequalized
BER 0.000534 | EVM 11.26%
LMS FFE
BER 0.000278 | EVM 11.12%
ANN tanh 16
BER 0.00016 | EVM 11.04%
Ideal QAM
Quadrature (Q)
In-phase (I)
First 8,192 identical held-out symbols shown; metrics use all 65,536 test symbols. Common axes; no additional gain/phase fitting.