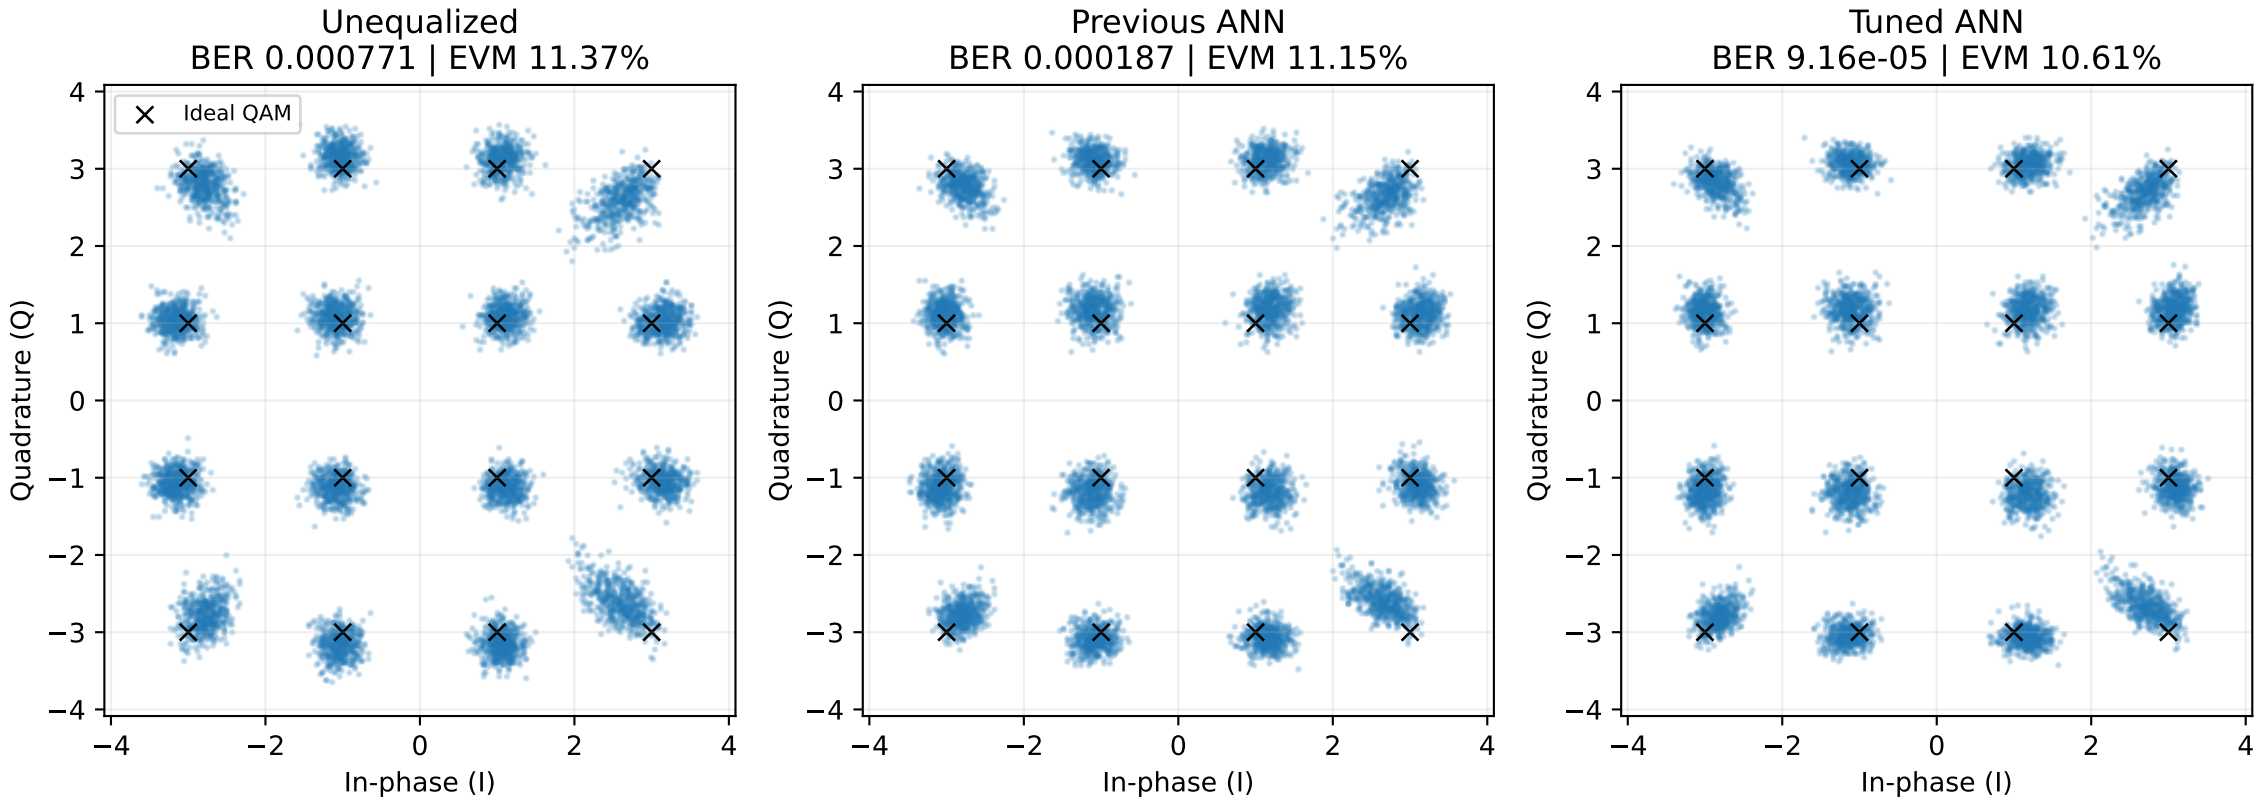

reference | ROP -17.5 dBm | 16-QAM
Unequalized
BER 0.000771 | EVM 11.37%
Previous ANN
BER 0.000187 | EVM 11.15%
Tuned ANN
BER 9.16e-05 | EVM 10.61%
Ideal QAM
Quadrature (Q)
In-phase (I)
First 8,192 identical held-out symbols shown; metrics use all 65,536 test symbols. Common axes; no additional gain/phase fitting.