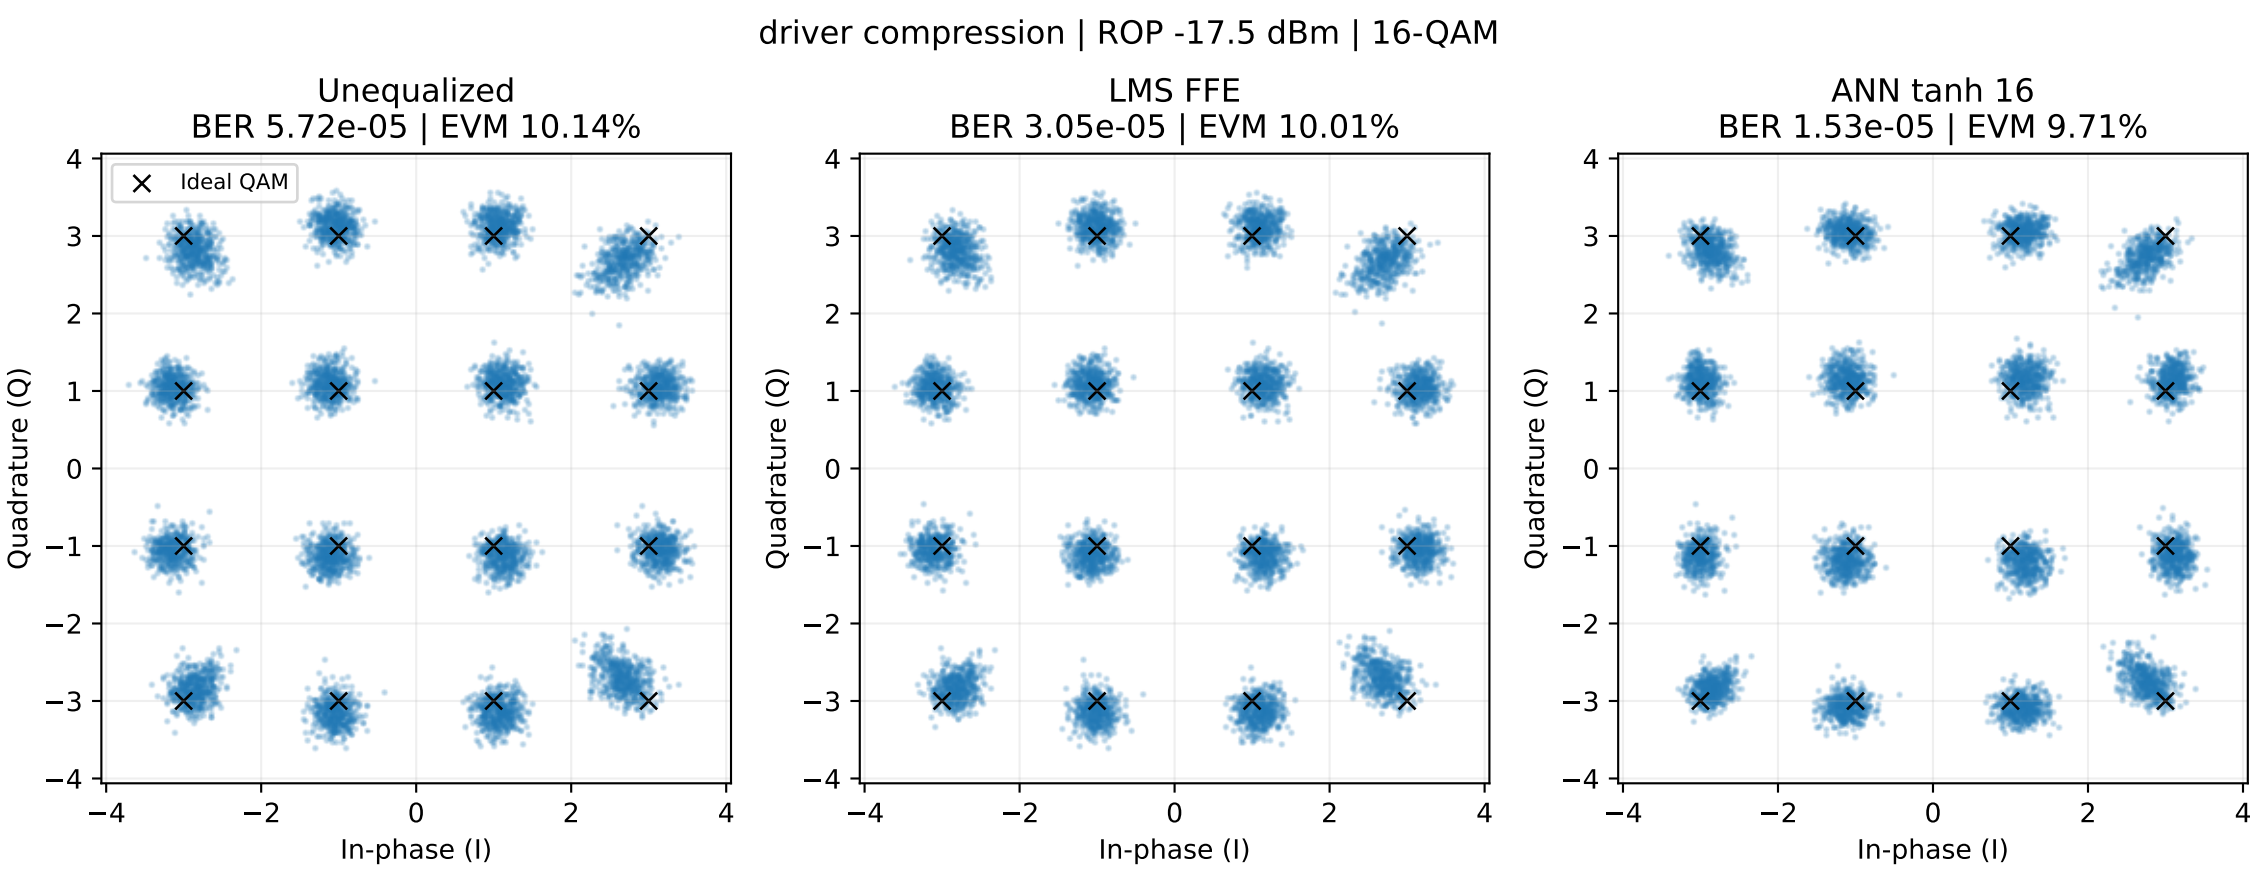

driver compression | ROP -17.5 dBm | 16-QAM
Unequalized
BER 5.72e-05 | EVM 10.14%
LMS FFE
BER 3.05e-05 | EVM 10.01%
ANN tanh 16
BER 1.53e-05 | EVM 9.71%
Ideal QAM
Quadrature (Q)
In-phase (I)
First 8,192 identical held-out symbols shown; metrics use all 65,536 test symbols. Common axes; no additional gain/phase fitting.